



a Standex company

ITEM: \_\_\_\_\_ PROJECT NAME: \_\_\_\_\_ DATE: \_\_\_\_\_

## CURVED GLASS REFRIGERATED MAXI DELI CASE

- MODEL  MCG-454-DC  
 MCG-654-DC  
 MCG-854-DC  
 MCG-1054-DC



*The Maxi Deli delivers full-size capacity with sleek curved-glass styling to maximize performance. Cases are available in lengths of 4', 6', 8' and 10'. Designed for continuous case line-ups.*


### STANDARD FEATURES

- Lift-up, pneumatic, cylinder-assisted, tempered thermopane curved front glass.
- Tempered end glass and rear doors.
- Stainless steel deck.
- Fold-down rear wrapping board.
- Coated evaporator coil(s).
- Adjustable temperature control.
- Adjustable lighted mezzanine shelf.
- Thermometer.
- Accepts full-size deli risers and meat trays.
- Self-contained with condensate evaporator pan /remote refrigeration available.
- Double-duty, refrigerated pull-out storage drawers. 4' has one drawer, 6' and 8' have two drawers, 10' has three drawers.
- Stainless steel exterior finish/laminated finishes available.
- Gravity coil.
- UL Safety and UL Sanitation Listed.
- Decorative end panels and front bumper rail available in white, black, gray and green.
- Designed for continuous case line-ups.
- Appliance receptacle provided on back.

# CURVED GLASS REFRIGERATED MAXI DELI CASE

## OPTIONAL ACCESSORIES:

- Special Base Finish
- Additional Lighted Mezzanine Shelf
- Paper Roll Cutter/Holder
- Reflective Ends
- Reflective Doors
- Remote Refrigeration
- Scale Stand
- Slicer Stand
- Deli Step Pan Holder or Risers
- Promolux Lighting
- Decorative End Panel Colors
- Cord & Plug (NEMA 5-20P)

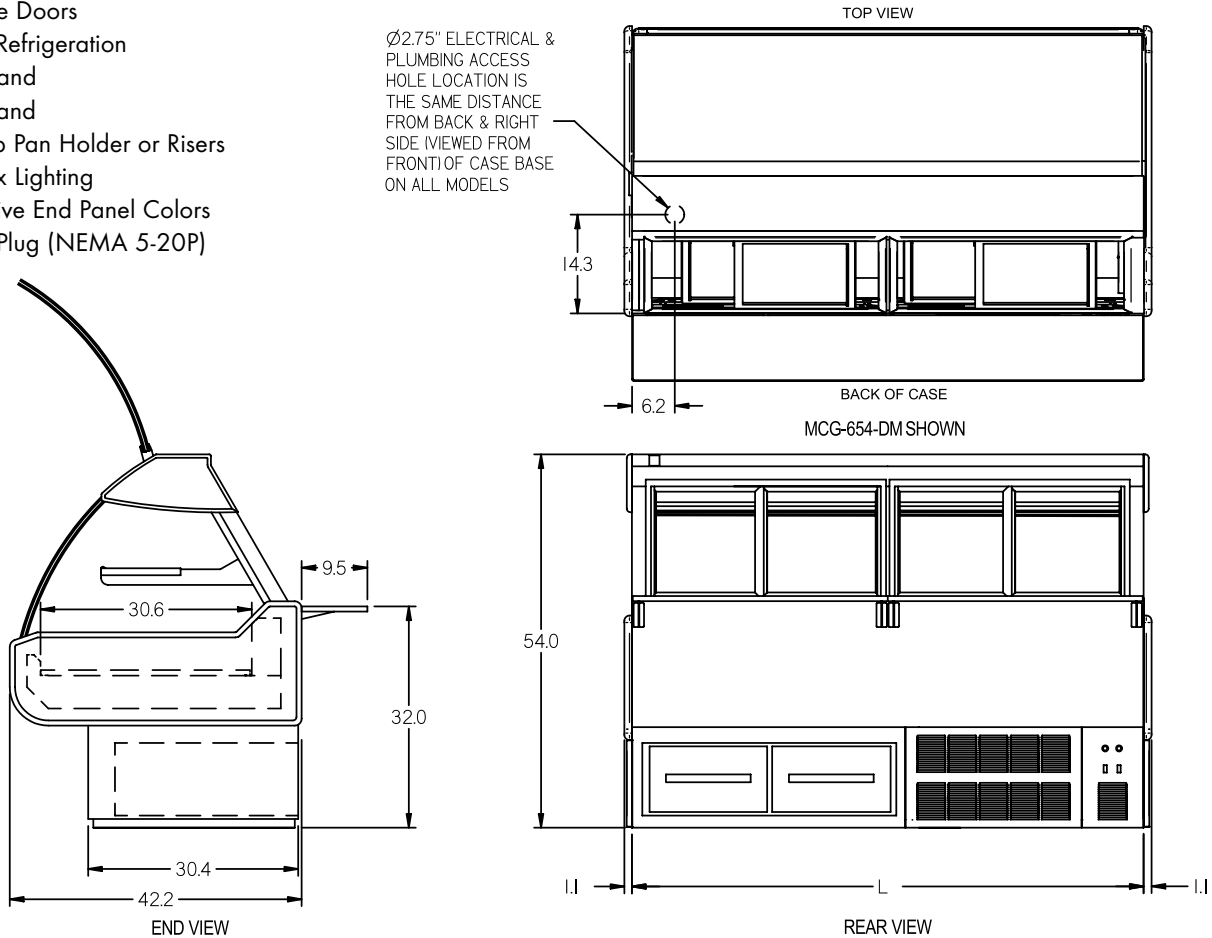

## SPECIFICATIONS:

Model	Dimensions L W H	Shipping Weight (lbs)	Capacity (Step Risers)	Self-Contained 120/60/1	Remote 120/60/1
<input type="checkbox"/> MCG-454-DC	50" x 42.25" x 54"	730	4	3/4 HP • 15.4 AMPS	10.4 AMPS
<input type="checkbox"/> MCG-654-DC	74" x 42.25" x 54"	930	6	3/4 HP • 15.6 AMPS	10.6 AMPS
<input type="checkbox"/> MCG-854-DC	98" x 42.25" x 54"	1,230	8	3/4 HP • 15.8 AMPS	10.8 AMPS
<input type="checkbox"/> MCG-1054-DC	122" x 42.25" x 54"	1,530	10	3/4 HP • 16.0 AMPS	11.0 AMPS

- Includes general purpose receptacle 115V, 3AMP.
- Refrigerated cases are designed to operate in a maximum of 75°F ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.



*The Signature of Quality*

**FEDERAL INDUSTRIES**  
A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201

PHONE: 800-356-4206

EMAIL: geninfo@federalind.com

FAX: 608-424-3234

WEBSITE: www.federalind.com

