



a Standex company

ITEM: _____ PROJECT NAME: _____ DATE: _____

CURVED GLASS REFRIGERATED MAXI DELI CASE

MODEL ☐ **MCG-454-DC**
☐ **MCG-654-DC**
☐ **MCG-854-DC**
☐ **MCG-1054-DC**



The Maxi Deli delivers full-size capacity with sleek curved-glass styling to maximize performance. Cases are available in lengths of 4', 6', 8' and 10'. Designed for continuous case line-ups.


STANDARD FEATURES

- Lift-up, pneumatic, cylinder-assisted, tempered thermopane curved front glass.
- Tempered end glass and rear doors.
- Stainless steel deck.
- Fold-down rear wrapping board.
- Coated evaporator coil(s).
- Adjustable temperature control.
- Adjustable lighted mezzanine shelf.
- Thermometer.
- Accepts full-size deli risers and meat trays.
- Self-contained with condensate evaporator pan /remote refrigeration available.
- Double-duty, refrigerated pull-out storage drawers. 4' has one drawer, 6' and 8' have two drawers, 10' has three drawers.
- Stainless steel exterior finish/laminated finishes available.
- Gravity coil.
- UL Safety and UL Sanitation Listed.
- Decorative end panels and front bumper rail available in white, black, gray and green.
- Designed for continuous case line-ups.
- Appliance receptacle provided on back.

CURVED GLASS REFRIGERATED MAXI DELI CASE

OPTIONAL ACCESSORIES:

- ☐ Special Base Finish
- ☐ Additional Lighted Mezzanine Shelf
- ☐ Paper Roll Cutter/Holder
- ☐ Reflective Ends
- ☐ Reflective Doors
- ☐ Remote Refrigeration
- ☐ Scale Stand
- ☐ Slicer Stand
- ☐ Deli Step Pan Holder or Risers
- ☐ Promolux Lighting
- ☐ Decorative End Panel Colors
- ☐ Cord & Plug (NEMA 5-20P)

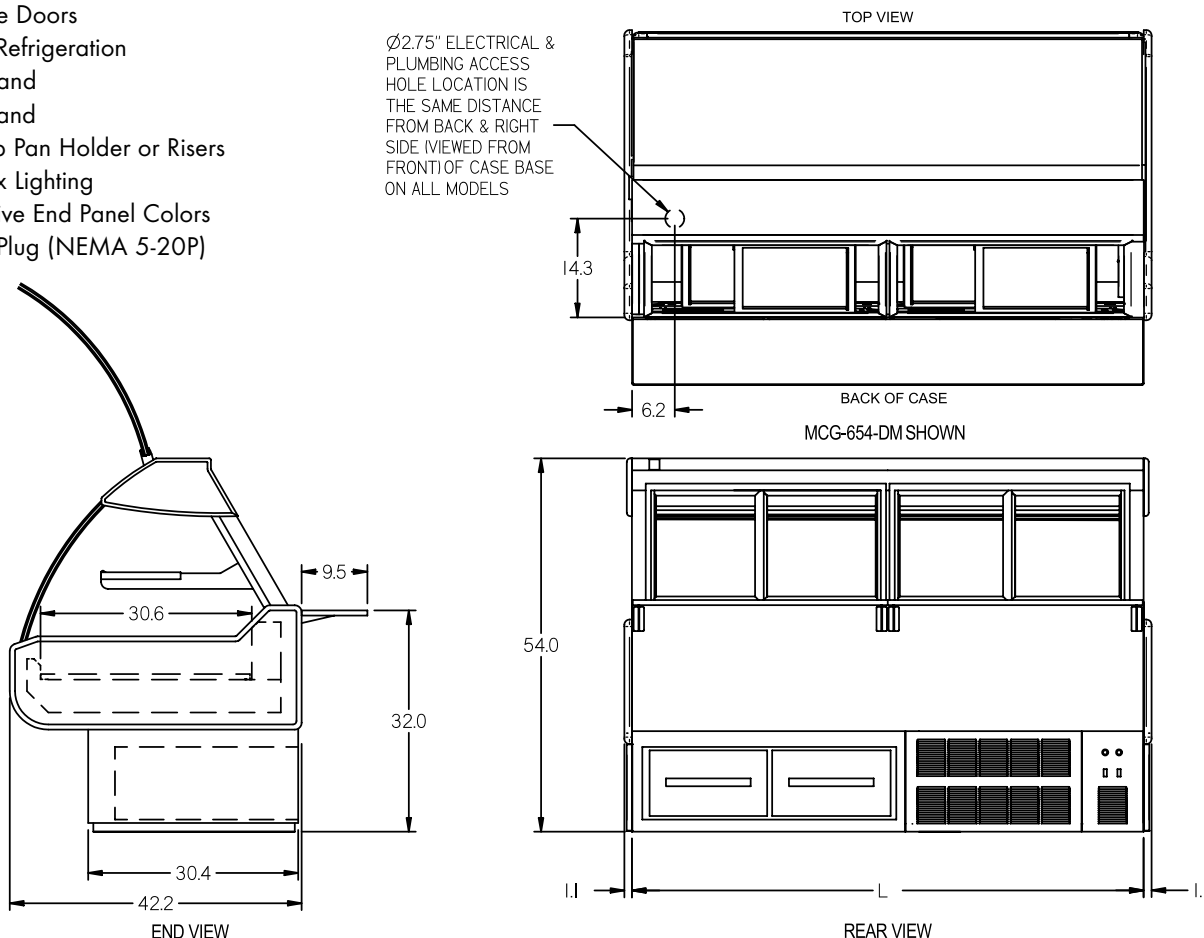

SPECIFICATIONS:

Model	Dimensions L W H	Shipping Weight (lbs)	Capacity (Step Risers)	Self-Contained 120/60/1	Remote 120/60/1
☐ MCG-454-DC	50" x 42.25" x 54"	730	4	3/4 HP • 15.4 AMPS	10.4 AMPS
☐ MCG-654-DC	74" x 42.25" x 54"	930	6	3/4 HP • 15.6 AMPS	10.6 AMPS
☐ MCG-854-DC	98" x 42.25" x 54"	1,230	8	3/4 HP • 15.8 AMPS	10.8 AMPS
☐ MCG-1054-DC	122" x 42.25" x 54"	1,530	10	3/4 HP • 16.0 AMPS	11.0 AMPS

- Includes general purpose receptacle 115V, 3AMP.
- Refrigerated cases are designed to operate in a maximum of 75°F ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.



The Signature of Quality

FEDERAL INDUSTRIES
A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201

PHONE: 800-356-4206

EMAIL: geninfo@federalind.com

FAX: 608-424-3234

WEBSITE: www.federalind.com

