

FEDERAL INDUSTRIES

A Standex Company 215 Federal Avenue Belleville, WI 53508-9201

Phone: 800-356-4206 Fax: 608-424-3234

Email: geninfo@federalind.com Website: www.federalind.com

	AIA#
Project Name:	
Item #:	
Model #: Qty:	SIS#
Approval:	

SERIES '90 SELF-SERVE NON-REFRIGERATED BAKERY CASE

Series '90. The ultimate merchandiser with advanced styling for maximum visual appeal. Designed for continuous line-ups.



MODEL	DIMENSIONS (Includes End Panels)
□ SN48SS	48.25 x 37.75 x 48.50 (in)
	1226 x 959 x 1232 (mm)
□ SN59SS	59.25 x 37.75 x 48.50 (in)
	1505 x 959 x 1232 (mm)
□ SN77SS	77.25 x 37.75 x 48.50 (in)
	1962 x 959 x 1232 (mm)

STANDARD FEATURES

Model Features

- Acrylic lift-up self-closing front doors. The 48" has two sets of doors, 59" has three sets, and the 77" has four sets of doors.
- Removable sliding rear doors, shelf lights, shelf supports, and shelves.
- Adjustable Leg Levelers
- Vent system to reduce heat build-up from the lights.
- Acrylic ends and glass rear doors. Rear doors are sloped for product access.
- All-welded base construction with a choice of six standard laminates on base. Other color laminates optional.
- Easily accessible control panel with main power, auxiliary fan, and light control.
- White display deck.

Shelving

 Two tiers of adjustable white cantilevered wire shelves. Shelves are adjustable up and down and can also be tilted.

Lighting

- flourescent top light and shelf lights. Lights are independently wired.
- DLC Certified, IP66 rated.

Agency Approvals

- UL Safety and UL Sanitation Listed.
- DOE 2017 Compliant.

OPTIONAL ACCESSORIES

- ☐ Special Base Finish
- ☐ Package Shelf w/Bag Holder and Tissue Dispenser
- ☐ Light Below Package Shelf
- ☐ Glass Shelves
- □ Mirrored Ends
- ☐ Reflective Rear Doors
- ☐ Special Trim

- ☐ Black Interior (Including Shelves)
- □ Cord and Plug (NEMA 5-15P)
- □ Rear Wrapping Board
- ☐ Casters (Cord and Plug Included)
- ☐ Black Wire Shelves
- □ Legs









AIA#


SIS#

SERIES '90 SELF-SERVE NON-REFRIGERATED BAKERY CASE

Product Specifications

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE +/- 0.19 (4.8)

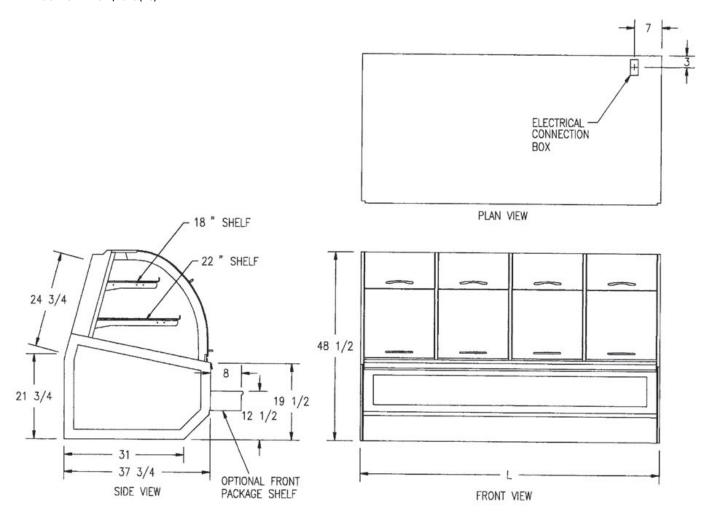

MODEL -	DIMENSIONS*			SHIPPING WHT		CAPACITY	REMOTE		
	L	D	H1	UNITS	LBS	KILO	(BAKERY PANS)	120/60/1	
CNIAGE	48.25	37.75	48.5	in.	750	240	2 (18" X 26")	2.0 AMARC	
SN48SS 122	1226	959	1232	mm.		340	8 (12" X 18") 1 (9" X 26")	2.0 AMPS	
CNEOCC	59.25	37.75	48.5	in.	775 352	775 352	7 (18" X 26")	2 O AMPS	
SN59SS	1505	959	1232	mm.			7 (18 X 26)	2.0 AMPS	
SN77SS	77.25	37.75	48.5	in.	1050	1050	476	4 (18" X 26")	2.0 AMPS
	1962	959	1232	mm.		1050 4/6	12 (12" X 18")	Z.U AMIPS	

- If a GFCI circuit is required, a GFCI Breaker Must be used instead of GFCI receptacle.
- Due to continuing engineering improvements, specifications are subject to change without notice.









FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue Belleville, Wisconsin 53508-9201

Phone: 800-356-4206 Fax: 608-424-3234

Email: Geninfo@Federalind.com **Website:** Federalind.com