OVENS



VC5E SERIES SINGLE DECK ELECTRIC CONVECTION OVEN

Item # _



Model VC5ED Shown with optional legs & casters







SPECIFICATIONS

Single section, electric convection oven, Vulcan Model No. (VC5ED). Stainless steel front, sides and top. Painted legs. Independently operated removable stainless doors with double pane windows. Non-sag insulation applied to top, rear, sides, bottom. Porcelain enamel on steel oven interior measures 29"w x 221/8"d x 20"h. One interior oven light. Five nickel plated oven racks measure 281/4" x 201/2". Eleven position nickel plated rack guides with positive rack stops. Heated by electric solid sheath elements rated at 12.0 KW. Furnished with a two speed ½ H.P. oven blower motor. Oven cool switch for rapid cool down. 208/240V 60Hz 1 or 3 phase.

Exterior Dimensions:

40"w x 401/8"d (includes motor & door handles) 37"d (includes motor only) 54"h on 233/4" legs (add 2" if on casters)

□ VC5ED

Solid state temperature dial controls adjust from 150° to 500°F with digital display enhancement, 5-hour timer with audible alarm.

STANDARD FEATURES

- Independently operated removable stainless steel doors with double pane windows.
- Gentle Bake mode selector switch.
- On-board diagnostics for easy servicing
- Five nickel plated grab-and-go oven racks with eleven rack positions.
- Stainless steel front, sides and top.
- Painted legs.
- 12.5 total KW.
- ½ H.P. two speed oven blower-motor.
- Moisture vent.
- Oven cool switch for rapid cool down.
- Porcelain enamel on steel oven interior.
- One year limited parts and labor warranty.
- Three year limited warranty on doors.

_		_		_
\sim r		$\boldsymbol{\wedge}$	м	c
VГ	7 I I	v	IA	J

- ☐ Stainless steel legs.
- □ Casters.
- 480V/60 Hz/1 or 3 phase.
- ☐ Second year extended limited parts and labor warranty.

ACCESSORIES

- ☐ Stainless steel rear motor enclosure.
- □ Extra oven rack(s).
- ☐ Rack hanger(s).
- ☐ Stainless steel drip pan.
- ☐ Stainless steel open stand with adjustable rack supports, stainless steel shelf and choice of adjustable feet or casters.
- □ Down draft flue diverter for direct vent connection.
- ☐ Heat shields for oven sides.






VC5E SERIES SINGLE DECK ELECTRIC CONVECTION OVEN


OPTIONAL VOLTAGES


☐ 480 volt, 60 Hz, 3 phase.

CLEARANCES

	Combustible	Non-Combustible
Rear	2"	2"
Right Side	4"	4"
Left Side	1"	1"

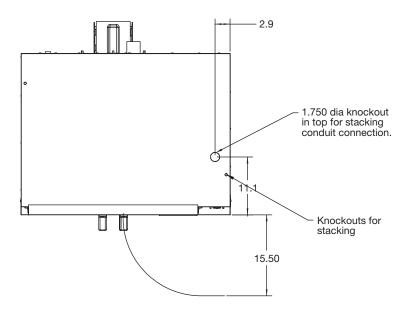





3 PHASE						NOMINAL AMPS PER LINE WIRE											WEIGHT		
LOAD					3 PHASE								WITH SKID &		WITHOUT SKID &				
MODEL	CONN.	DHACE		208 VOLT			240 VOLT		480 VOLT		1 PHASE		PACKAGING						
NO.	KW	X-Y	Y-Z	X-Z	Х	Υ	Z	Х	Υ	Z	Х	Υ	Z	208V	240V	LBS.	KG	LBS.	KG
VC5E	12.5	4	4	4.5	35	33	35	33	29	33	14	15	15	60	52	337	153	286	130



a division of ITW Food Equipment Group LLC

P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602

