




# Specifications

F.O.B Sedalia, Missouri 65301



2602



2603

### OPTIONS:

- Enclosed base - 6" high
- Cord and plug - 8'
- Casters - 5" polyurethane, 2 swivel w/brakes 2 rigid
- Push bar
- Bumpers - stainless steel
- Door Panels - laminated plastic
- Additional pair 3" angle slides
- Door locks
- Legs
- 440-480V Circuit
- Celsius thermometer in lieu of Fahrenheit
- 208V/1Ph; 208V/3Ph; 240V/1 PH; 240/3PH

### AGENCY LISTING:



**DUKE MANUFACTURING CO.**  
2305 N. Broadway  
St. Louis, MO 63102

800.735.3853 Toll Free  
314.231.5074 Fax  
www.dukemfg.com

## Approval Stamp(s):

### PRODUCT INFORMATION:

PROJECT: \_\_\_\_\_

ITEM: \_\_\_\_\_

QUANTITY: \_\_\_\_\_

### MODEL:

## Thermotainer Food Holding Cabinets - "A" Series 9"H x 14"W x 23-1/2" D Compartments

- 2602** Reach-In 1 thermostat per compartment , w/o legs
- 2602P** Pass-Thru 1 thermostat per compartment , w/o legs
- 2603** Reach-In 1 thermostat per compartment , w/o legs
- 2603P** Pass-Thru 1 thermostat per compartment , w/o legs

### BODY:

- Heavy gauge stainless steel, all panels except bottom
- Shell welded to interior
- Die-stamped compartment openings

### DOORS:

- Stainless steel, die-stamped, embossed front
- Ribbed Interior
- Reinforced for mounting hardware
- Insulated with fiberglass
- Spring hinges die-stamped, with built-in-stop externally adjustable, completely concealed

### COMPARTMENT:

- Heavy gauge stainless steel
- Rounded corners
- Stainless steel studs for angle slides at 3 levels
- (2) removable, adjustable, stainless steel, 5" angled slide pairs
- Removable liner for inspection and maintenance

### ELECTRICAL CONTROLS:

- Recessed thermostat w/built-in On-Off switch
- Heat range 100° - 300° and dial thermometer
- Pilot lights
- Recessed connection box
- Removable access panel

### DAMPERS:

- 2-position sliding type
- Controlled by push buttons
- Compartments individually controlled

### INSULATION:

- Body fully insulated with 1-1/2" fiberglass

### HEATING ELEMENTS:

- Sheath type strip heaters, 120 Volt, 1 Phase
- Removable compartment for ease of access to heating elements.



### SHORT FORM SPECIFICATIONS:

**Duke Thermotainers Food Holding Cabinets.** Models 2602/2602P constructed with two (2) compartments. Models 2603/2603P to have three (3) compartments. Compartments 9"H x 14"W x 23-1/2"D. Each compartment to have two (2) pairs of removable stainless steel slides. One thermostat per compartment. 100° - 300°F heat range with dial thermometer. Built-in installation - allow 1/4" tolerance greater than body width.



**THERMOTAINER FOOD HOLDING CABINETS - "A" SERIES  
9"H x 14"W x 23-1/2"D COMPARTMENTS**

- 2602** Reach-In 1 thermostat per compartment, w/o legs
- 2602P** Pass-Thru 1 thermostat per compartment, w/o legs
- 2603** Reach-In 1 thermostat per compartment, w/o legs
- 2603P** Pass-Thru 1 thermostat per compartment, w/o legs

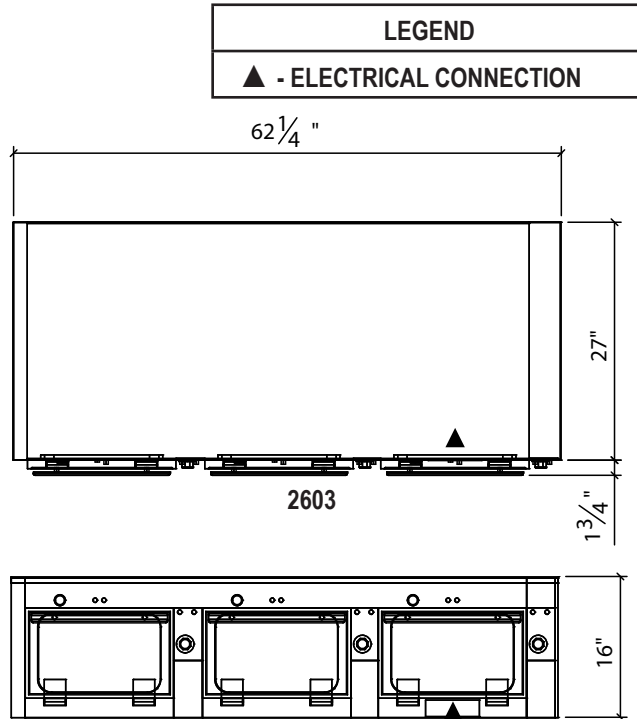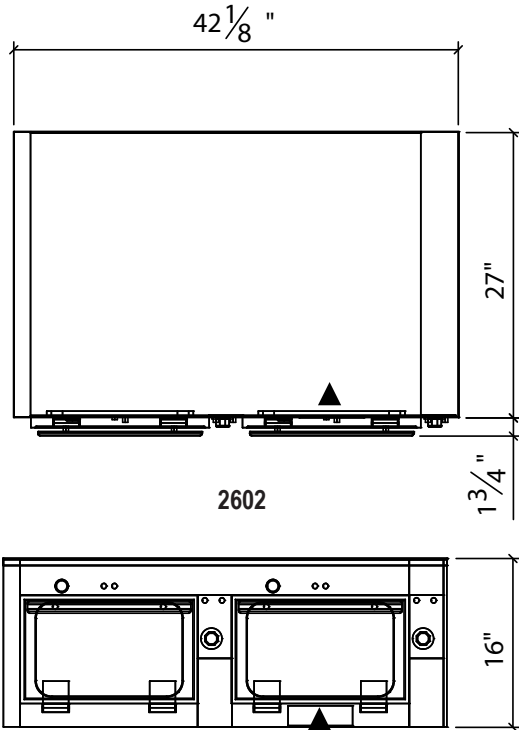

**LEGEND**

▲ - ELECTRICAL CONNECTION

**DIMENSIONS:**

Freight Class: 100

Model	Width		Depth		Height		Comp. Depth		Cube ft. Crated	Weight	
	in.	cm.	in.	cm.	in.	cm	in.	cm		lbs.	kg
2602	42-1/8	107.2	28-3/4	73.0	16	40.6	23-1/2	59.7	21.9	300	136.4
2602P	42-1/8	107.2	30-1/2	77.5	16	40.6	23-1/2	64.8	23.1	300	136.4
2603	62-1/4	158.1	28-3/4	73.0	16	40.6	23-1/2	59.7	31.0	375	170.5
2603P	62-1/4	158.1	30-1/2	77.5	16	40.6	25-1/2	64.8	32.7	375	170.5

**ELECTRICAL SPECIFICATIONS:** (Consult factory for 3-phase electrical requirements and other options.)

Model	Connected Load
2602	1500 watts
2602P	1500 watts
2603	2250 watts
2603P	2250 watts

	2602/2602P	2603/2603P
<b>Capacity w/standard slides</b>	(6) 12" x 20" x 2" pans or (4) 12" x 20" x 4" pans or (2) 12" x 20" x 8" pans	(9) 12" x 20" x 2" pans or (6) 12" x 20" x 4" pans or (3) 12" x 20" x 8" pans

- 2602 Reach In - hinged doors on front only
- 2602P Pass Thru - hinged doors on front & back for pass-thru service
- 2603 Reach In - hinged doors on front only
- 2603P Pass Thru - hinged doors on front & back for pass-thru service



**DUKE MANUFACTURING CO.**  
2305 N. Broadway  
St. Louis, MO 63102

800.735.3853 Toll Free  
800.231.1130 In Missouri  
314.231.5074 Fax  
[www.dukemfg.com](http://www.dukemfg.com)

Specification subject to change