



Specifications

F.O.B Sedalia, Missouri 65301



ADI-2ESL

OPTIONS:

- 3 phase wiring (except ADI-1E)
- 1,000 watt element
- Designer Foodshields
- Stainless spillage pans
- Telescope covers
- Adapter Plates
- Adapter Bars

AGENCY LISTING:



DUKE MANUFACTURING CO.
 2305 N. Broadway
 St. Louis, MO 63102

800.735.3853 Toll Free
 314.231.5074 Fax
 www.dukemfg.com

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____
 ITEM: _____
 QUANTITY: _____

MODEL:

Drop-Ins- Slimline

Hot Food - Electric - Exposed Element Wells

- ADI-1ESL 24 1/4"L x 17 1/4"W x 12 3/4"H
- ADI-2ESL 46 1/4"L x 17 1/4"W x 12 3/4"H
- ADI-3ESL 68 1/4"L x 17-3/8"W x 12 3/4"H

TOP RIM:

- Heavy gauge, 300 Series stainless steel
- Overhang on front, back and ends w/locking tabs
- Vinyl foam gasket as sealant
- Die-stamped openings - 12-1/16" x 20-1/16"

HEAT COMPARTMENTS:

- Exposed element in each compartment
- Voltage/Phase/Watt
 - 120 Volt/1 Ph/500 watt element
 - 208 Volt/1 Ph/750 watt element
 - 240 Volt/1 Ph/750 watt element
- 8" deep stainless steel liner, dry operation
- Insulated bottom
- Includes #576 aluminum spillage pans for use with water

CONTROL PANEL:

- Stainless steel face plate, plastic knobs
- UL approved
- Infinite switch controls in remote box

EXTERIOR HOUSING

- Heavy gauge paint grip steel


SHORT FORM SPECIFICATIONS:

Duke Drop-In - Slimline - Hot Food - Electric. Top flange of heavy gauge 300 series s/s with overhang on 4 sides, 12-1/16" x 20-1/16" die-stamped hot food openings, 8" deep liner, fully insulated, with remote control panel, s/s top and interior liner, heavy gauge paint grip steel exterior housing, exposed elements, infinite switch controls, includes 576 spillage pans




**DROP-INS - SLIMLINE
HOT FOOD - ELECTRIC**

- ADI-1ESL 24 1/4" L x 17 1/4" W x 12 3/4" H
- ADI-2ESL 46 1/4" L x 17 1/4" W x 12 3/4" H
- ADI-3ESL 68 1/4" L x 17 1/4" W x 12 3/4" H

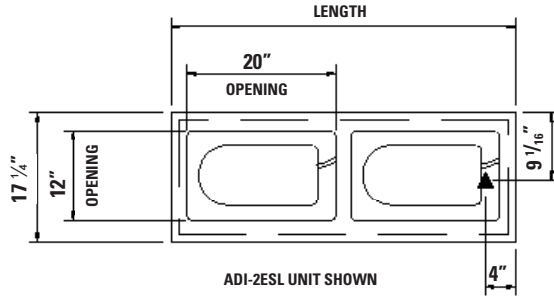


TOP VIEW

LEGEND	
▲	- ELECTRICAL CONNECTION
Allow 4" gap between controls and unit	

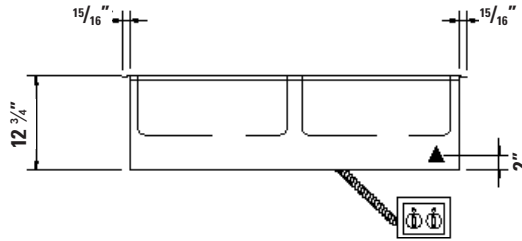

FRONT VIEW



RIGHT SIDE VIEW

DIMENSIONS

FREIGHT CLASS: 100

Model	Length		Width		Height		Top Openings	Cutout Length		Cutout Width		Control Panels	Cube Crated ft.	Weight	
	in.	cm	in.	cm	in.	cm		in.	cm	in.	cm			lbs.	kg.
ADI-1ESL	24 1/4	61.6	17 1/4	43.8	12-3/4	32.4	1	23	58.4	16	40.6	1	7.7	80	36.4
ADI-2ESL	46 1/4	117.5	17 1/4	43.8	12-3/4	32.4	2	45	114.3	16	40.6	1	13.3	135	61.4
ADI-3ESL	68 1/4	173.1	17 1/4	43.8	12-3/4	32.4	3	67	170.2	16	40.6	1	19.0	185	84.1

REMOTE CONTROL CUTOUT IS 9" X 4-3/8"

ELECTRICAL SPECIFICATIONS: (Consult factory for 3-phase electrical requirements and other options)

Model	120 Volt/500 Watt		208 Volt/750 Watt		240 Volt/750 Watt	
	watts	amps	watts	amps	watts	amps
ADI-1ESL	500	4.2	750	3.6	750	3.1
ADI-2ESL	1000	8.3	1500	7.2	1500	6.3
ADI-3ESL	1500	12.5	2250	10.8	2250	9.4



DUKE MANUFACTURING CO.

2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
800.231.1130 In Missouri
314.231.5074 Fax
www.dukemfg.com

Specification subject to change