


SINGLE FLAVOR, COUNTER-TOP GRAVITY SOFT SERVE FREEZER



- Precision controlled refrigeration system designed for quality product consistency from the first cone to the last.
- Hard-working, compact counter-top unit that can handle peak demands, while providing years of dependable service.
- Highest capacity 115 volt soft serve freezer available, intended to reduce installation costs.
- IntelliTec control communicates with operator for worry-free operation.
- Energy Conservation Mode (ECM) protects product from over-agitation during slow or non-draw periods.
- Proprietary auger design gently folds mix and prevents product breakdown, producing a smoother, creamier product.
- Clear door shows visible moving product for merchandising appeal.
- Self-closing spigot eliminates waste and assures precise portion control.
- Adjustable dispense rate for optimal product output.
- Long-wearing parts, offers lower preventative maintenance costs.
- Built for ease of operation and cleaning.
- Optional floor stand to create a “floor model” package, freeing up counter space and providing additional storage.



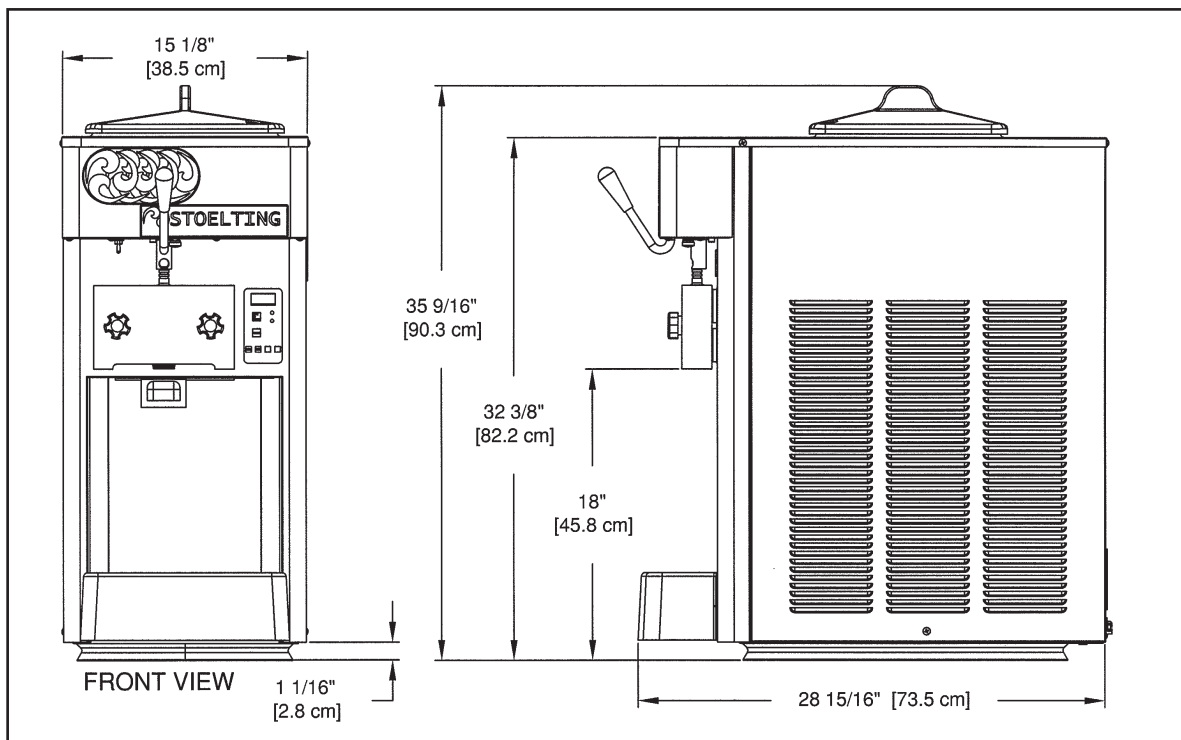

SPECIFICATIONS	MODEL E111		MODEL F111	
	FREEZER	WITH CRATE	FREEZER	WITH CRATE
DIMENSIONS				
Width	15 1/8" (38.5 cm)	19 1/2" (49.5 cm)	15 1/8" (38.5 cm)	19 1/2" (49.5 cm)
Height	35 9/16" (90.3 cm)	43" (109.2 cm)	35 9/16" (90.3 cm)	43" (109.2 cm)
Depth	28 15/16" (73.5 cm)	33 1/2" (85.1 cm)	28 15/16" (73.5 cm)	33 1/2" (85.1 cm)
WEIGHT				
FREEZER	220 lbs. (99.8 kg)	265 lbs. (120.2 kg)	230 lbs. (104.3 kg)	275 lbs. (124.7 kg)
ELECTRICAL	1 phase, 115 volt, 60 hz. Approximately 12 total running amps. 15 amp fuse, HACR circuit breaker or regular circuit breaker. NEMA 5-20P, 20 amp 125 volt power cord provided. 220 volt, 50 hz, 1 phase.		1 phase, 208/230 dual volt, 60 hz. Approximately 10 total running amps. 15 amp fuse, HACR circuit breaker or regular circuit breaker. NEMA 6-15P, 15 amp 250 volt power cord provided. 220 volt, 50 hz, 1 phase.	
REFRIGERANT	R404A		R404A	
COMPRESSOR	3,550 Btu/hr.		4,770 Btu/hr.	
DRIVE MOTOR	3/4 hp		3/4 hp	
COOLING	Air-Cooled		Air or Water-Cooled	
AIR FLOW	Right to left air flow. Units require 3"(7.6 cm) clearance on both sides of unit.		Right to left air flow. Units require 3"(7.6 cm) clearance on both sides of unit.	
HOPPER SIZE	3.4 Gallons, 13.6 Quarts, 12.8 Liters		3.4 Gallons, 13.6 Quarts, 12.8 Liters	
FREEZING CYLINDER SIZE	0.65 Gallon, 2.6 Quarts, 2.46 Liters		0.85 Gallon, 3.4 Quarts, 3.22 Liters	

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice.

Distributed by:



FOODSERVICE EQUIPMENT
 502 Highway 67 • Kiel, WI 53042-1600
 920-894-2293 • 800-558-5807
 Fax: 920-894-7029
 E-mail: foodservice@stoelting.com
www.stoeltingfoodservice.com

ISO 9001:2000 Registered

Certified, Listed and/or
Recognized by:



0308