



Project:

Item Number:

Quantity:

E112 SHAKE OR SLUSH COUNTERTOP FREEZER



DESCRIPTION

Single flavor, gravity shake or slush freezer, compact counter-top model, offers the convenience to serve frozen beverages, shakes, smoothies or frozen cocktails in one machine.

| | |
|--|---|
| | <p>Every machine includes Stoelting's White Glove Service. One call does it all – customer service, technical service, parts or warranty information, installation, startup, sales, on-site service dispatch and much more. Available 24 hours a day, seven days a week year-round.</p> |
|--|---|

ITEMS

- E112-37 Air-Cooled, Single Phase
- SE112-18 Air-Cooled, Single Phase with Spinner

MIX INLET REGULATOR – (REQUIRED)

One required.

- 2183642** Shake Mix Inlet Regulator

OPTIONS AND ACCESSORIES

- FS1** Floor Stand 24" x 15" x 28"
- FS2** Floor Stand 24" x 22" x 30"
- FSS2** Floor Stand 24" x 22" x 25"
- FS4** Floor Stand 24" x 22" x 19"
- 2183807** Kit to Add Autofill Capability
- 2187905** Brix Autofill Kit (5 to 1 Ratio)
- 2203249** Brix Autofill Kit (3 to 1 Ratio)
- 2187040** Bottle Rack Kit (Includes 7 Plastic Bottles and Pumps)

FEATURES


- Compact, space-saver unit, offers the convenience to serve frozen beverages, shakes, smoothies or frozen cocktails.
- One selector switch, auto-off-clean, for simplified operation and cleaning.
- Low mix warning light with electronic controls are auto-fill ready.
- Stainless stator auger, heavy-duty speed reducer, 1/3 hp drive motor for long life dependability.
- Stator bar agitates frozen beverage mixes with a wide range of sugar content (Brix measurement).
- Filtered bottom air inlet permits side-by-side installation with 4 in (10.2 cm) of back air clearance.
- One piece clear polycarbonate door highlights pre-flavored products.
- Electric CO₂ or air operated autofill kits available.
- On demand defrost insures a smooth drink with consistent quality.

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice and should not be used as installation specifications.

| Approvals | Date |
|-----------|------|
| | |

E112 SHAKE OR SLUSH COUNTERTOP FREEZER

DIMENSIONS

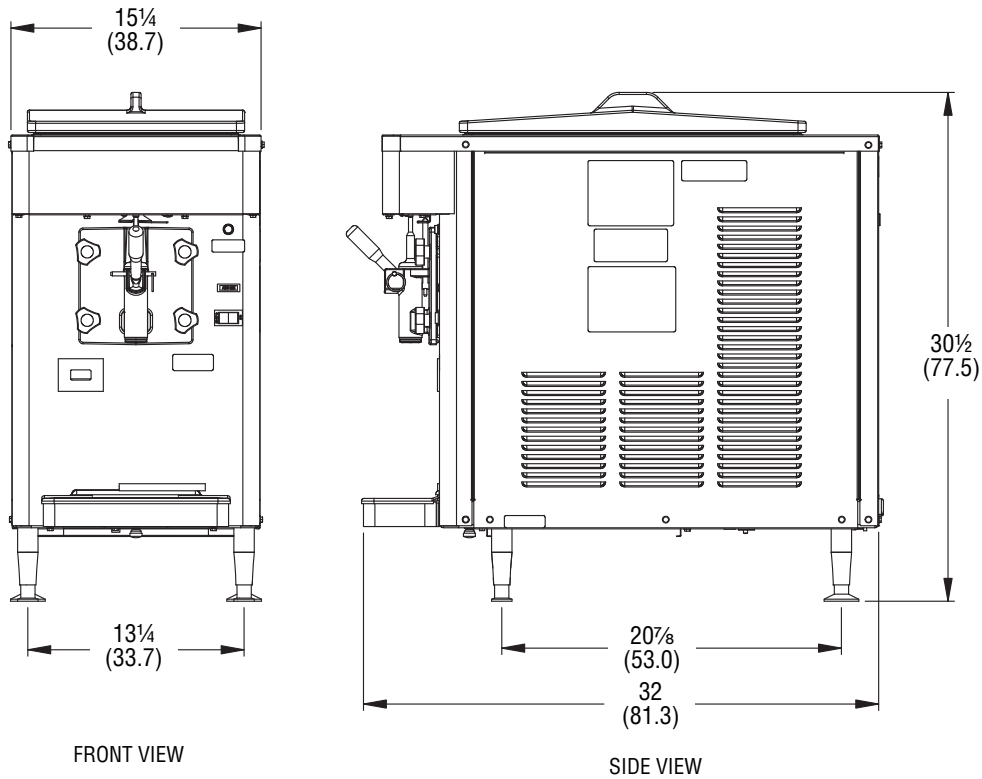

GENERAL SPECIFICATIONS

| Machine | Freezing Cylinder | | | Drive Motor (hp) | Hopper Capacity gallon (L) | Weight lb (kg) | Crated Weight lb (kg) |
|---------|---------------------|-------------------|-------------|------------------|----------------------------|----------------|-----------------------|
| | Capacity gallon (L) | Compressor Btu/hr | Refrigerant | | | | |
| E112 | 1.25 | 4,250 | R-404A | 1/3 | 3.63 (13.7) | 205 (92.9) | 215 (97.5) |
| SE112 | (4.7) | | | | | | |

- Requires a dedicated electrical circuit.
- Indoor use only.
- Maximum ambient temperature: 100°F (37.8 °C).
- Minimum clearance: 3" (7.6 cm) air space on left and right sides or 4" (10.2 cm) air space in back for side-by-side installation.

ITEM NUMBER SPECIFICATIONS

| Item No. | Cooling | Phase | Volts | Hz | Running Amps | Plug |
|----------|---------|-------|-------|----|--------------|------------|
| E112-37 | Air | 1 | 115 | 60 | 16 | NEMA 5-20P |
| SE112-18 | | | | | | |



Service Information
 800-319-9549 (U.S. Toll Free)
 920-894-2293 (Outside the U.S.)
 www.stoeltingfoodservice.com
 www.vollrath.com