


FROZEN BEVERAGE DISPENSER



LE257
Floor Model
depicting
optional cup holders

- Large 10-gallon capacity for high-volume dispensing.
- Compact design saves floor or counter space.
- Reliable proven design provides consistent servable product.
- Ideal for convenience stores, delis, restaurants, schools, cafeterias, and recreational facilities.
- Simple installation with 115 volt plug-in.
- Optional attractive merchandising graphics, or add your own for impulse purchases.
- Optional cup holders.

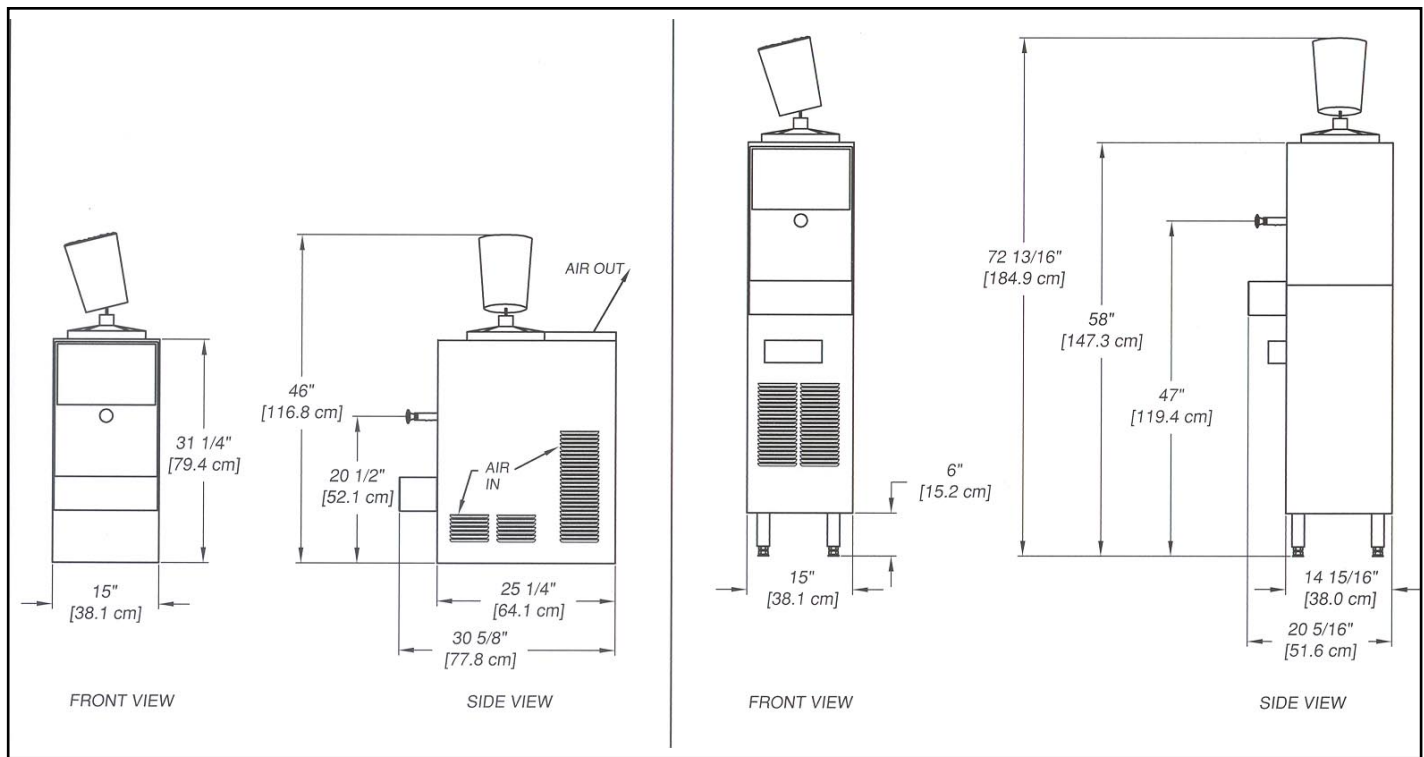

| SPECIFICATIONS | MODEL LE157 | | MODEL LE257 | |
|--------------------|--|--------------------|---|--------------------|
| DIMENSIONS | FREEZER | WITH CRATE | FREEZER | WITH CRATE |
| Depth | 30 5/8" (77.8 cm) | 35 1/2" (90.2 cm) | 20 5/16" (51.6 cm) | 21" (53.3 cm) |
| Width | 15" (38.0 cm) | 28" (71.0 cm) | 15" (38.0 cm) | 17" (43.0 cm) |
| Height | 31 1/4" (79.4 cm) | 40 1/4" (102.2 cm) | 58" (147.0 cm) | 66" (167.6 cm) |
| WEIGHT | FREEZER | WITH CRATE | FREEZER | WITH CRATE |
| | 142 lbs. (64.4 kg) | 200 lbs. (90.7 kg) | 140 lbs. (63.5 kg) | 165 lbs. (74.8 kg) |
| ELECTRICAL | 1 phase, 115 volt. Approx. 7 running amps. Use 15 amp circuit breaker . Cord connected. NEMA 5-15P, 15 amp, 125 volt. | | 1 phase, 115 volt. Approx. 7 running amps. Use 15 amp circuit breaker. Cord connected. NEMA 5-15P, 15 amp, 125 volt. | |
| REFRIGERANT | R-22 | | R-22 | |
| COMPRESSOR | 2060 B.T.U.H. | | 2060 B.T.U.H. | |
| DRIVE MOTOR | 1/6 H.P. | | 1/6 H.P. | |
| COOLING | Air cooled | | Air cooled | |
| AIR FLOW | Air cooled requires minimum 6" (15.2 cm) clearance on sides and rear. | | Air cooled requires minimum 6" (15.2 cm) clearance on front & back. No Clearance needed on side. | |
| HOPPER SIZE | 4-gallon freezing chamber 6-gallon reserve | | 4-gallon freezing chamber 6-gallon reserve | |
| WARRANTY | One-year parts and labor warranty; five year warranty on compressor, evaporator assembly. | | | |

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice.

Distributed by:



502 Highway 67 • Kiel, WI 53042-1600
920-894-2293 • 800-558-5807
Fax: 920-894-7029
E-mail: commercial@stoelting.com
Internet: www.stoelting.com

ISO 9001:2000 Registered

Certified, Listed and/or Recognized by:



05/06