


SLIM, TWIN TWIST, FLOOR MODEL SOFT SERVE FREEZER WITH REFRIGERATED CAB



- Maintains high production capacity even in high temperature conditions, plus provides greater reliability and quieter operation, with Stoelting's high efficiency evaporator system in combination with the Scroll™ compressor
- Refrigerated mix storage cabinet holds (2) 5-1/2 gallon mix containers, slide-out mix shelf, plus non-contact mix-out system.
- Torque/temperature control with LCD display for each side (NAFEM Protocol capable)
- Air/mix pumps inject the exact amount of air into your mix, maintaining consistent overrun to assure maximum profitability with clean-in-place simplicity
- Self-sharpening, non-metallic auger flights for reliable service
- Built for consistent control of all mixes, including low-fat, low-sugar (low-carb) mixes
- Durable stainless steel exterior with new, sleek, rounded corner design
- Ideal choice for locations where space is an issue
- Optional bag connection system eliminates potential contamination sources

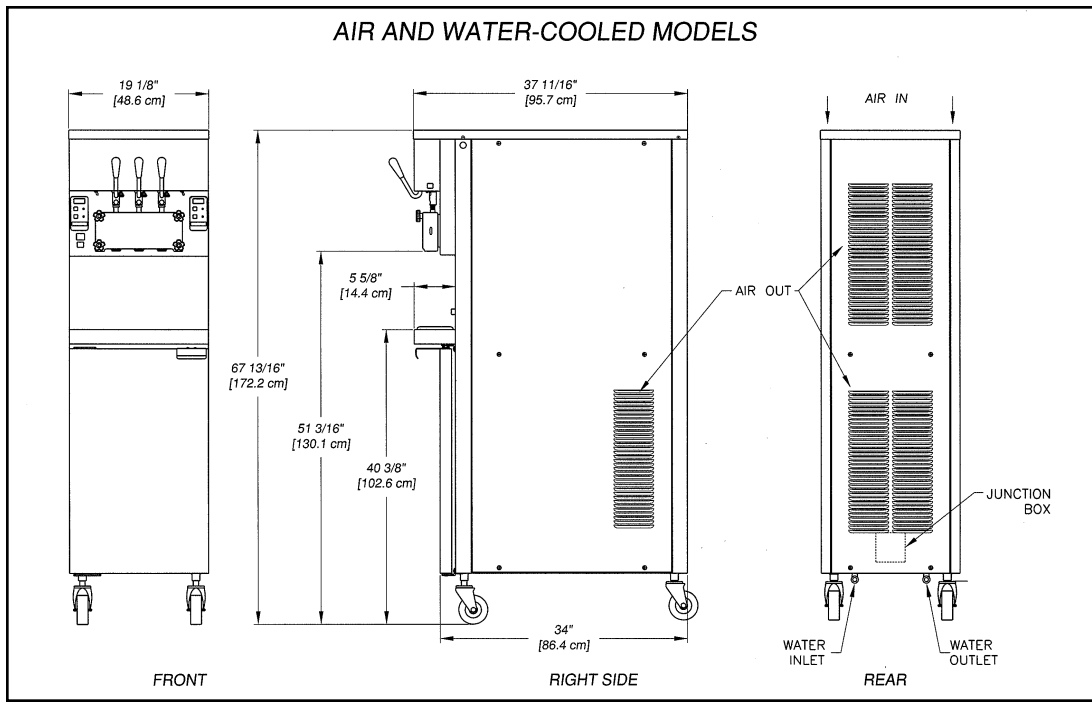

SPECIFICATIONS	MODEL F431 (Air or Water-Cooled)	
DIMENSIONS	FREEZER	WITH CRATE
Depth	38 1/4" (97.1 cm)	48" (121.9 cm)
Width	19 1/2" (49.5 cm)	27 (68.6cm)
Height	67" (170.2 cm)	78 (198.1 cm)
WEIGHT	FREEZER	WITH CRATE
	500 lbs. (226.8 kg)	650 lbs. (294.8 kg)
ELECTRICAL	1 phase, 208-230 VAC, 60 Hz	
	Water Cooled	Air Cooled
Minimum Circuit Ampacity	23	24
Maximum Fuse HACR or Standard Circuit Breaker Size	30	30
REFRIGERANT	R404A	
COMPRESSOR	(1) 11,000 B.T.U./hr. Scroll™ compressor	
DRIVE MOTOR	(2) 3/4 H.P.	
COOLING	Air or water cooled units available.	
AIR FLOW	In top, out back and sides (3" minimum clearance side, 6" back)	
PLUMBING FITTINGS	Water cooled requires 1/2" N.P.T. water and drain fittings.	
FREEZING CYLINDER SIZE	(Two) .85 gal. , 3.4 quart, 3.2 litre.	
MIX STORAGE CONTAINERS	(Two) 5-1/2 gal.	
WARRANTY	One-year warranty; five year warranty on compressor, evaporator assembly, drive motor, speed reducers, auger shaft, and auger flights (against breakage).	



Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice.

Distributed by:



502 Highway 67 • Kiel, WI 53042-1600
 920-894-2293 • 800-558-5807
 Fax: 920-894-7029
 E-mail: commercial@stoelting.com
 Internet: www.stoelting.com

Certified, Listed and/or Recognized by:



08/04