

SINGLE-FLAVOR PRESSURIZED SHAKE FREEZER WITH REFRIGERATED CABINET




Model U412 (without mixer).

- Mix pump injects the precise amount of air into your mix, providing consistent overrun to ensure maximum profitability.
- Clean-in-place simplicity of pump reduces labor.
- Maintains high production capacity in high temperature conditions.
- Provides greater reliability and quieter operation with Stoelting's high efficiency evaporator and Scroll™ compressor.
- Refrigerated mix storage cabinet holds an 8-gallon mix container, a slide-out mix shelf, and a non-contact mix-pump system.
- Proprietary auger design gently folds mix and prevents product breakdown, producing a smoother, creamier product.
- Splash shield for safety and to control spray for fast and easy clean-up.
- Dispensing and mixing product is accomplished with a single front-mounted handle, for fastest speed of service.
- The IntelliTec control features a display which communicates with the operator for worry-free operation.
- Built for consistent control of all mixes, including low-fat, low-sugar mixes.
- Ideal choice for locations where space is an issue. This freezer can be installed in direct contact with other equipment or walls.
- Optional bag connection system eliminates potential mix contamination sources.



AIR AND WATER-COOLED MODELS

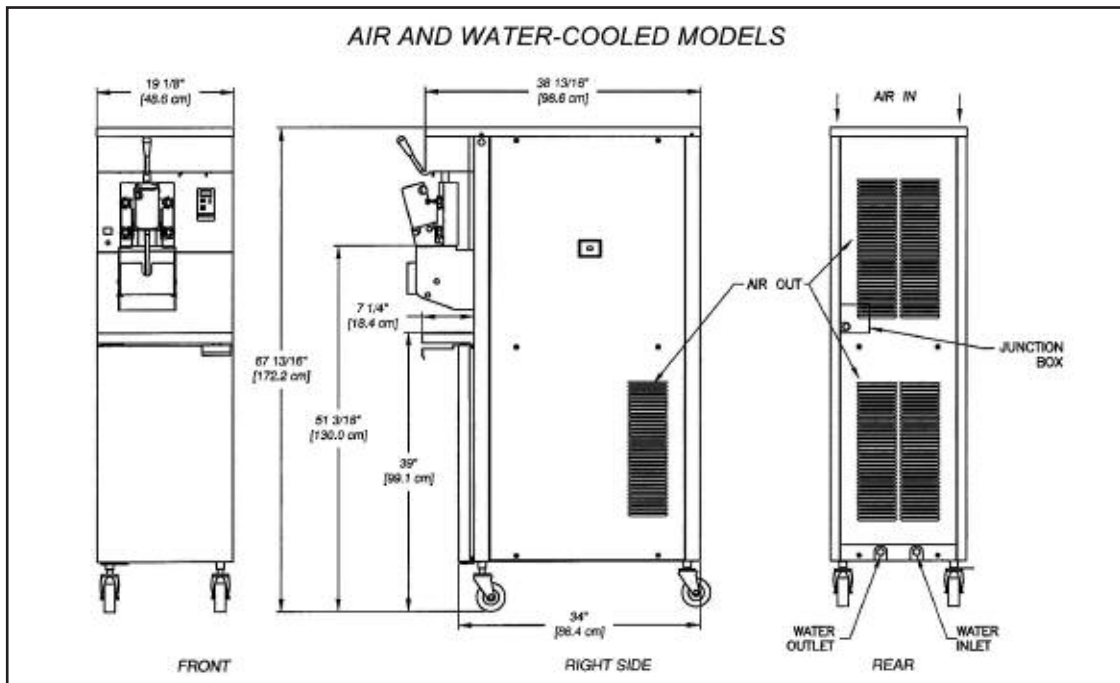

SPECIFICATIONS	MODEL SU412	
DIMENSIONS	FREEZER	WITH CRATE
Width	19 1/8" (48.6 cm)	27" (68.6 cm)
Height	67 13/16" (172.2 cm)	78" (198.1 cm)
Depth	38 13/16" (98.8 cm)	48" (121.9 cm)
WEIGHT	FREEZER	WITH CRATE
	480 lbs. (272.7 kg)	630 lbs. (285.7 kg)
ELECTRICAL	1 phase, 208-230 volt, 60 Hz	
	Minimum Circuit Ampacity	Water Cooled Air Cooled
	Fuse, HACR or regular circuit breaker	18 19
		30 30

	1 phase, 220-240 volt, 50 Hz also available.	
REFRIGERANT	R404A HFC environmentally friendly refrigerant	
COMPRESSOR	11,000 Btu/hr Scroll™ Compressor	
DRIVE MOTOR	3/4 hp	
AIR FLOW	Air cooled units require 3" air clearance on each side. Back air clearance of 6" required for side by side installation.	
PLUMBING FITTINGS	Water-cooled units require 1/2" N.P.T. water and drain fittings.	
FREEZING CYLINDER VOLUME	2.1 gallons (8.4 quarts), 7.9 liters	
MIX STORAGE CONTAINER	8 gallons (32 quarts), 30.3 liters	
WARRANTY	Five-year warranty on compressor, evaporator assembly, drive motor speed speed reducers, and auger. One-year warranty on remaining parts and labor.	

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice.

Distributed by:



FOODSERVICE EQUIPMENT
 502 Highway 67 • Kiel, WI 53042-1600
 920-894-2293 • 800-558-5807
 Fax: 920-894-7029
 E-mail: foodservice@stoelting.com
www.stoeltingfoodservice.com

ISO 9001:2000 Registered

