


PRESSURIZED DOUBLE CYLINDER SOFT SERVE FREEZER



- Ultra high production capacity with (2) 18,000 B.T.U.H. compressors and (two) 2 HP drive motors, providing continuous production from each cylinder.
- Refrigerated mix storage cabinet holds 8 gallons mix per cylinder, plus the ability to use bag-in-box packaging. Serves up to 680 four-ounce cones before refilling.
- Offers a high dispensing rate and allows two operators to dispense product at the same time for high volume serving periods.
- Includes: Integral mix pumps, mix containers, spare parts kit, spigot extensions, and casters.
- Air/mix pumps inject the exact amount of air into your mix, maintaining constant overrun to assure maximum profitability, with clean-in place simplicity.
- Proprietary auger design gently folds mix and prevents product breakdown, producing a smoother, creamier product.
- Long-wearing parts offer lower preventative maintenance costs.
- Clear door shows visible moving product for merchandising appeal.
- Standby refrigeration mode provides fresh creamy product at opening time.
- Forced refrigeration switch; constant ready-to-serve mode for high volume dispensing.
- Mix-low warning light automatically notifies operator when mix needs to be added.
- The U421 is the ideal choice for restaurants, drive-ins, recreational facilities, ice cream parlors, schools and cafeterias.
- Optional bag-connection system.

 **STOELTING**
Since 1905

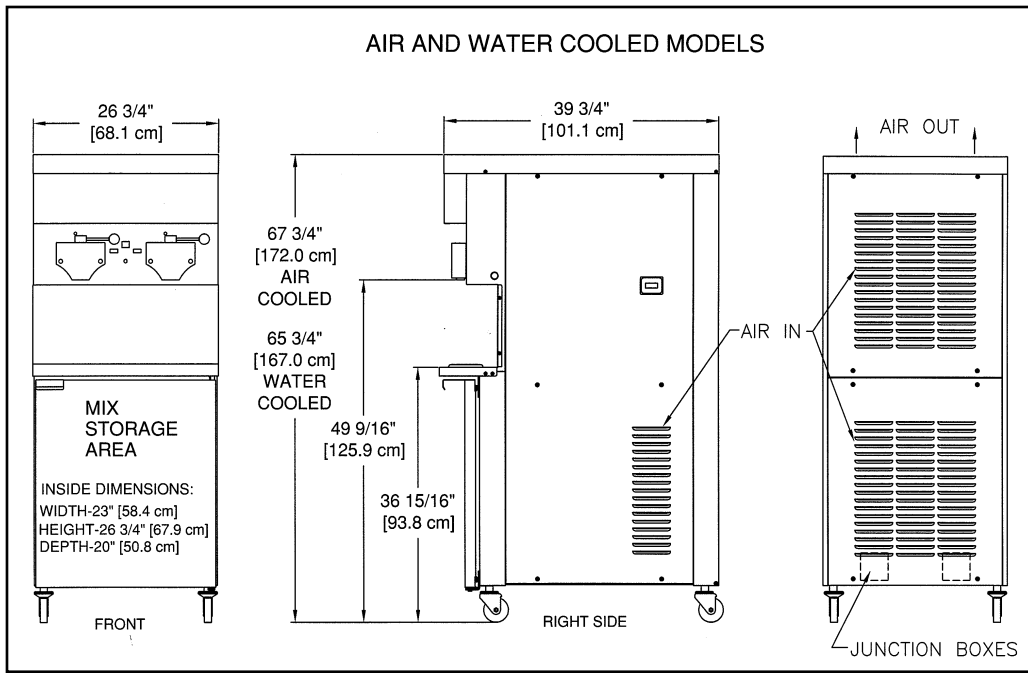

SPECIFICATIONS	MODEL U421 (water cooled)				MODEL U421 (air-cooled)					
DIMENSIONS Depth Width Height	FREEZER		WITH CRATE		FREEZER		WITH CRATE			
	39 3/4" (101.1 cm)		48" (121.9 cm)		39 3/4" (101.1 cm)		48" (121.9 cm)			
	26 3/4" (68.1 cm)		34" (86.4 cm)		26 3/4" (68.1 cm)		34" (86.4 cm)			
	65 3/4" (167.0 cm)		78" (198.1 cm)		67 3/4" (172.0 cm)		78" (198.1 cm)			
WEIGHT	FREEZER 760 lbs. (344.7 kg)		WITH CRATE 908 lbs. (411.9 kg)		FREEZER 785 lbs. (356.1 kg)		WITH CRATE 935 lbs. (424.1 kg)			
ELECTRICAL 208/230 VOLT	ELECTRICAL 208/230 VOLT				ELECTRICAL 208/230 VOLT					
	1 PHASE		3 PHASE		1 PHASE		3 PHASE			
	Left Side	Right Side	Left Side	Right Side	Left Side	Right Side	Left Side	Right Side		
	Total Running Amps:	17.6	17.2	11.6	11.2	Total Running Amps:	20.8	17.2	14.8	11.2
	Min. Circuit Ampacity:	31	31	21	21	Min. Circuit Ampacity:	36	31	26	21
HACR Max. Circuit Breaker:	45	45	30	30	HACR Max. Circuit Breaker:	50	45	35	30	
Maximum Fuse Size:	45	45	30	30	Maximum Fuse Size:	50	45	35	30	
	International: 220-240/380-415 volts/50 hz/3 phase				International: 220-240/380-415 volts/50 hz/3 phase					
REFRIGERANT	R404A				R404A					
COMPRESSOR	(2) 18,000 B.T.U.H.				(2) 18,000 B.T.U.H.					
DRIVE MOTOR	(2) 2 H.P.				(2) 2 H.P.					
COOLING	Water-cooled.				Air-cooled.					
AIR FLOW	In sides and back, out top 3" minimum clearance.				In sides and back, out top 3" minimum clearance.					
PLUMBING FITTINGS	Water cooled requires 1/2" N.P.T. water and drain fittings.									
BARREL SIZE	(Two) 1 gallon				(Two) 1 gallon					
ACCESSORIES	Side-mounted Spinner #2177877 Dual bag connection kit #2177801									
WARRANTY	Five year warranty on compressor, evaporator assembly, drive motor, speed reducers, auger shaft, and auger flights (against breakage); One-year parts and labor warranty.									

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice.

Distributed by:


STOELTING
A Polar Ware Company
 502 Highway 67 • Kiel, WI 53042-1600
 920-894-2293 • 800-558-5807
 Fax: 920-894-7029
 E-mail: commercial@stoelting.com
 Internet: www.stoelting.com

ISO 9001:2000 Registered

Certified, Listed and/or Recognized by:



05/06