



110 Woodcrest Road, Cherry Hill, NJ 08003-3648
 856.428.4200 • 800.523.5008 • Fax: 856.428.7299
 www.victoryrefrigeration.com • email: sales@victoryrefrigeration.com



PROJECT: _____
 LOCATION: _____
 ITEM #: _____
 QUANTITY: _____

ULTRASPEC™ SERIES

GRIDDLE STAND REFRIGERATORS

STANDARD FEATURES

- Stainless Steel Front, Top, Sides and Interior
- Self-Contained Refrigeration System
- Environmentally Safe R-134a Refrigerant
- Dial Thermometer
- Plasticized Evaporator Fin Coils
- Electric Condensate Evaporator
- Foamed-in-Place Polyurethane Insulation
- Drawers Hold Two (2) 12" x 20" x 4" Pans (Not Included)
- Drawers are Self-Closing with a Stay Open Feature
- 14 Gauge Stainless Steel Drawer Slide
- Ergonomically Correct Handles, Guaranteed for Life
- 6" High, Adjustable Stainless Steel Legs
- Stainless Steel Front Louvered Grille
- One Piece, Snap-In Magnetic Gasket(s)
- Anti-Condensate Perimeter Heaters
- High Impact, Non-Conducting Thermal Breaker Cap
- Cord and Plug (see electrical data for details)



GRS-2-S1

OPTIONS AND ACCESSORIES

- Remote Models (Two and Three Sections Only)
- Stainless Steel Case Back
- Stainless Steel Top with Drip Guard (Marine) Edge
- 6" Overall Height Casters
- Door in Lieu of 2 Drawers
- Optional Voltages
- Two (2) Year Service Warranty

MODELS



Stainless Steel
Exterior and Interior

- GRS-1-S1
- GRS-2-S1
- GRS-3-S1




NOTE: Not all marks refer to all models

3 Year Parts and Labor Warranty • 5 Year Compressor Warranty

Victory Refrigeration specification sheets are available online at www.victoryrefrigeration.com

APPROVALS:

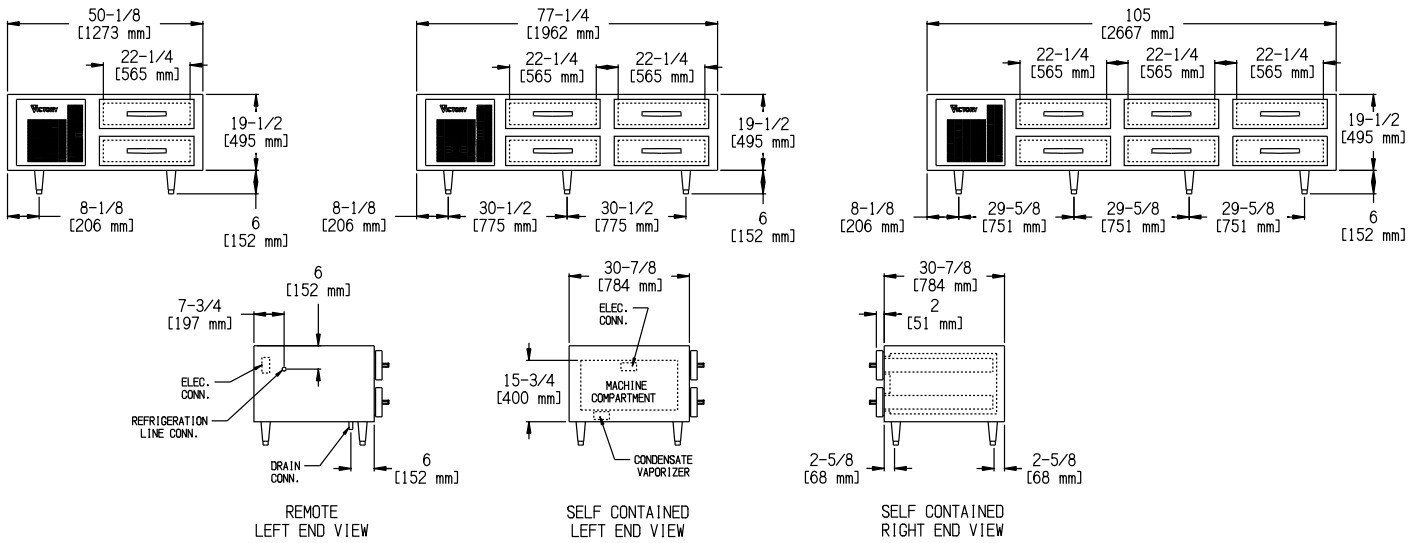

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CABINET CONSTRUCTION

The cabinet front, doors, sides, top and interior are constructed of heavy gauge, polished stainless steel to maintain an attractive appearance after years of heavy use. Foamed-in place polyurethane insulation throughout the cabinet and drawers ensures the ultimate in energy efficiency. The front grille is removable to provide easy access to the condenser and facilitate cleaning.

DRAWER CONSTRUCTION

The drawers are heavy gauge, polished stainless steel with 14 gauge stainless steel slides. Each drawer is self-closing with a stay open feature. The horizontal handles are guaranteed for life. Each drawer has a snap-in place magnetic gasket for a positive seal. Perimeter heater wires around the drawer openings help prevent condensation from forming on the front of the cabinet. Each heater wire is concealed and protected by a high impact, non-conducting breaker cap.

REFRIGERATION SYSTEM

A high efficiency, air-cooled, self-contained refrigeration system is mounted on the side of the cabinet and located behind the easily removable front louvered grille. Environmentally friendly R-134a refrigerant is efficiently metered by a capillary system providing a constant, safe operating temperature and quick "recovery" under the most demanding conditions. The hermetically sealed system is designed to operate at 38°F. The fans and cooling coil, which is plasticized to resist food acids, move cold air from side to side, top to bottom to keep food product at a safe storage temperature. All condensate water is disposed of automatically by the energy efficient, electric condensate evaporator.

INTERIOR STORAGE ARRANGEMENTS

Each drawer accommodates two (2) 12" x 20" x 4" pans (not included).

CHARACTERISTICS

DIMENSIONAL DATA

	1 SECTION	2 SECTION	3 SECTION
Capacity Net (cubic ft.)	6.0	12.0	18.0
Width*, Overall (in.)	50 1/8	77 1/4	105
* Remote Width, Overall (in.)	NA	60 1/2	87 5/8
Depth, Overall (inc. handles)	34 5/8	34 5/8	34 5/8
Height Overall (inc. 6" legs)	25 1/2	25 1/2	25 1/2
No. of Drawers	2	4	6
No. 12" x 20" Pans (not included)	4	8	12

MAXIMUM LOAD

	1 SECTION	2 SECTION	3 SECTION
On Top of Griddle Stands (lbs)	450	800	1300

ELECTRICAL DATA

	1 SECTION	2 SECTION	3 SECTION
Cabinet Voltage	115/60/1	115/60/1	115/60/1
Feed Wires	2	2	2
Condensing Unit Voltage	115/60/1	115/60/1	115/60/1
NEMA Plug	5-15 P	5-15P	5-15P
Total Amperes	8	8.3	8.6

REFRIGERATION DATA

	1 SECTION	2 SECTION	3 SECTION
Condensing Unit Size	1/4 HP	1/4 HP	1/4 HP
Refrigerant	R-134a	R-134a	R-134a

NOTE: Plug style, voltage and full load amps may vary depending on certain options selected such as special voltages and compressor upgrades.

REMOTE APPLICATIONS: See form V-RRDS1 for remote refrigeration characteristics by model.

CRATED DIMENSIONS & WTS.	HT.	WIDTH	DEPTH	FT ³	LBS
ONE SECTION	34 1/4	56 1/4	38 3/4	43.20	330
TWO SECTION	34 1/4	83 1/4	38 3/4	63.94	410
THREE SECTION	34 1/4	111	38 3/4	85.25	560

NOTE: In order to provide peak operating performance the cabinet must have a 2 inch all around clearance.