



|           |       |
|-----------|-------|
| Project:  | _____ |
| Location: | _____ |
| Item #:   | _____ |
| Quantity: | _____ |

## VS-Series Freezers

### VSF MODELS —

Stainless steel front,  
sides and interior.

**VSF-1**

**VSF-2**

**VSF-3**



**VSF-2**

### Standard Features

- Stainless Steel Fronts, Sides and Interior for Durability
- Energy Efficient ABS Thermal Breakers Around Door Jamb
- Heavy-Duty Swivel Casters with Brakes
- Recessed Interior Lighting
- Exterior Dial Thermometer
- Lifetime Self-Closing Camlift Hinges with 110° Stay-Open Feature
- Self-Adjusting Magnetic Door Gaskets
- Heavy-Duty Cylinder Locks
- Durable and Energy Efficient ABS Interior Door Liners
- Field Reversible Door Swing
- Door Opening Accepts 20" Wide Pan(s)
- Epoxy Coated Shelves Adjustable on 1" Centers
- Automatic Non-Electric Condensate Disposal System
- Environmentally Friendly R-404A Refrigerant
- Anti-Corrosion Coated Evaporator Coil
- Cord and Plug Attached on 115V Models 12 Amps or Less
- Automatic Defrost

### Optional Features:

- Rod Type Pan Slides
- Stainless Steel Angle Type Pan Slides
- Adjustable 6" Legs
- Two Half Doors in Place of One Full Length Door
- Change Door Swing
- Solar Digital Thermometer

### Cabinet:

Victory's Value Packed VS-Series Freezers are constructed of heavy gauge, polished stainless steel to maintain an attractive appearance and maximum durability for years to come.

Interiors feature coved corners that are easy to clean and maintain. An average of over 2 1/2 inches of foamed-in-place polyurethane insulation throughout the cabinet assures the food storage compartment remains well insulated promoting energy efficiency. The bottom of the storage compartment is made of heavy gauge metal with 3 1/2 inches of polyurethane insulation for exceptional strength. Interior lighting is recessed.

### Doors:

The self-closing doors stay open at 110° facilitating loading. Each door has a cylinder lock.

### Shelving:

Heavy-duty, epoxy coated steel shelves are mounted on pilaster strips and are adjustable on 1" increments. Wide door openings accommodate two 12" x 20", or one 18" x 26", or one 14" x 18" pans/trays per level.

### Refrigeration:

All components of the self-contained refrigeration system are mounted on top of the cabinet. The air circulating fans and the forced convection cooling coil are contained in an insulated housing separate from the product zone allowing for maximum food storage capacity. All condensate water is disposed of automatically by the energy efficient non-electric condensate evaporator, no plumbing is required.

The R-404A refrigerant used is environmentally friendly.

Approvals:




Victory Refrigeration specification sheets  
are available online at [www.victory-refrig.com](http://www.victory-refrig.com).

| CHARACTERISTICS                   | ONE SECTION<br>Reach-In | TWO SECTION<br>Reach-In | THREE SECTION<br>Reach-In |
|-----------------------------------|-------------------------|-------------------------|---------------------------|
| Width, Overall                    | 26 1/2                  | 52 1/8                  | 77 3/4                    |
| Depth, Overall (incl. handles)    | 33 3/4                  | 33 3/4                  | 34 1/2                    |
| Height, Overall (incl. adj. legs) | 83 5/8                  | 83 5/8                  | 83 3/4                    |
| Depth, Open Door 90°              | 56 1/2                  | 56 1/2                  | 56 1/2                    |
| Clear Door Opening, Width         | 21 1/4                  | 21 1/4                  | 21 1/4                    |
| Clear Full Door Opening, Height   | 54                      | 54                      | 54                        |
| Clear Half Door Opening, Height   | 25 1/4                  | 25 1/4                  | 25 1/4                    |
| Capacity Net (cubic feet)         | 21.0                    | 45.4                    | 69.0                      |
| No. of Full Doors                 | 1                       | 2                       | 3                         |
| No. of Half Doors                 | 2                       | 4                       | 6                         |
| No. of Shelves                    | 3                       | 6                       | 9                         |
| Shelf Area (square feet)          | 17.1                    | 36.0                    | 54.2                      |
| Cabinet Voltage                   | 115/60/1                | 115/60/1                | 115/60/1                  |
| Feed Wires                        | 2                       | 2                       | 3                         |
| Condensing Unit Voltage           | 115/60/1                | 115/60/1                | 208-230/60/1              |
| Condensing Unit Size (HP)         | 1/3                     | 1/2                     | 3/4                       |
| Total Amperes                     | 8.5                     | 12.0                    | 12.9                      |
| Plug, NEMA                        | 5-15P                   | 5-15P                   | Hardwire                  |

| Crated dim. & wts. | Ht. | Width  | Depth | Cu. Ft. | Lbs. |
|--------------------|-----|--------|-------|---------|------|
| One Section        | 83  | 34 1/2 | 43    | 82.2    | 325  |
| Two Section        | 83  | 59     | 43    | 143.3   | 530  |
| Three Section      | 73  | 86     | 43    | 204.4   | 650  |


Dimensional tolerance  $\pm 1/4"$  Metric dimensions (MM)

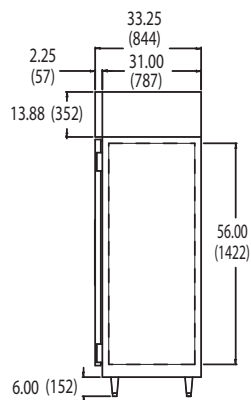


VSF-1, VSF-2, VSF-3 SIDE VIEW

**NOTE:** If cabinet is located directly against wall and/or under low ceiling, a minimum clearance of 2" is required.


We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.




VSF-1 TOP VIEW




VSF-2 TOP VIEW

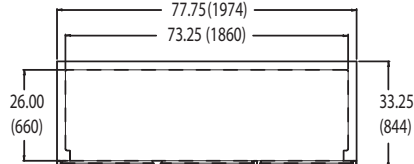


VSF-3 TOP VIEW

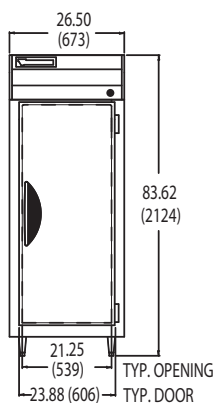

VSF-1 FRONT VIEW

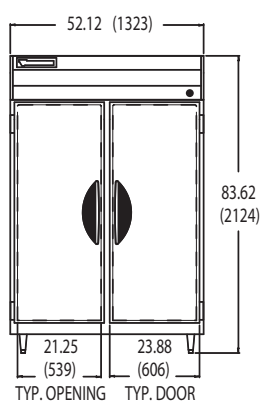

VSF-2 FRONT VIEW

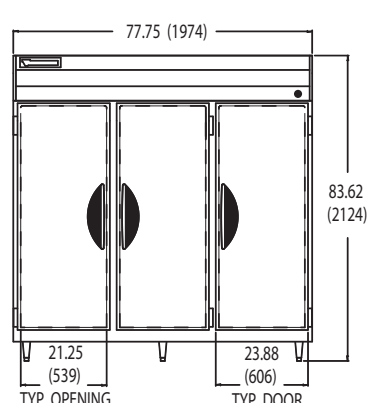

VSF-3 FRONT VIEW

Continuous product development may necessitate specification changes and design without notice.



Victory participates in the KCL CADalog, the most current source of CAD symbols for foodservice designers worldwide. Symbols include standard equipment in plan, side, front and 3-D views, layered for FEDTA/FCSI recommended guidelines.