



# Performance Features:

## Low Temperature Cook and Hold Oven With Smoker Feature

- ◇ Use settings or use manually
- ◇ Variable smoke time
- ◇ Switches automatically from Smoke to Cook to Hold mode
- ◇ Separate temperature displays for Cook and Hold modes
- ◇ Preset 12 menu selections
- ◇ Cook by internal probe (included)
- ◇ Cam door latch provides positive close and tight seal
- ◇ Smoker tray with extended handle allows for easy access for loading wood chips and cleaning



**Exclusive  
2-compartment  
smoke box provides  
longest burn time  
in the industry without  
wood chip refill.**



**Capacity:**  
Spacings @ 3"  
9 18" x 26" Trays  
18 12" x 20" Pans  
9 GN 2/1-65mm  
18 GN 1/1-65mm

**CH-9-SK**



# Low Temperature Cook and Hold Oven With Smoker Feature

- ◇ All stainless steel
- ◇ All welded construction - no rivets
- ◇ Welded base frame
- ◇ Polyurethane casters
- ◇ Silicon Gasket - High heat durable, long lasting and easy-to-clean
- ◇ Cord pocket - allows for multi-directional use
- ◇ Venting with door baffles
- ◇ Drip tray
- ◇ Fully insulated throughout
- ◇ Universal tray slides
- ◇ Two year limited warranty


## Specifications:

### Electrical Data:

CH-4-SK, CH-4-SK-S			CH-6-SK, CH-6-SK-S			CH-9-SK, CH-9-SK-S		
<b>VOLTS</b>	120	208	<b>VOLTS</b>	208	220-240	<b>VOLTS</b>	208	220-240
<b>WATTS</b>	2450	2450	<b>WATTS</b>	2450	2450	<b>WATTS</b>	3450	3450
<b>AMPS</b>	20.4	11.8	<b>AMPS</b>	11.8	10.2	<b>AMPS</b>	16.6	14.4
<b>HERTZ</b>	50/60	50/60	<b>HERTZ</b>	50/60	50/60	<b>HERTZ</b>	50/60	50/60
<b>PHASE</b>	Single	Single	<b>PHASE</b>	Single	Single	<b>PHASE</b>	Single	Single
<b>PLUG: USA</b>	5-30P	6-15P	<b>PLUG: USA</b>	6-15P	6-15P	<b>PLUG: USA</b>	6-20P	6-20P
<b>PLUG: CANADA</b>	5-30P	OR 6-20P	<b>PLUG: CANADA</b>	OR 6-20P	OR 6-20P	<b>PLUG: CANADA</b>	6-30P	6-20P

### Optional Accessories:

- All swivel or larger casters
- Push - pull bar handles
- Security panel for controls
- Extra tray slides
- Floorlock  
(requires 6" casters)
- Menu card holder
- Shelves

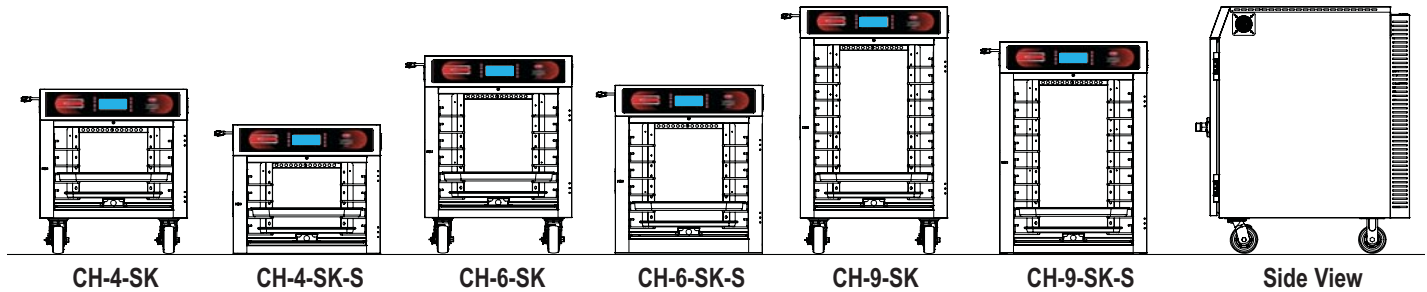

Smoker Oven MODEL NUMBER	TRAY/PAN SLIDES PROVIDED	CAPACITIES @ 3" Spacings (76mm)								OVERALL EXTERIOR DIMENSIONS IN. (mm)			CLASS 100		
		18 x 26	12 x 20	14 x 18	12 x 18	20 x 22	10 x 20	GN 2/1	GN 1/1	HIGH "H"	DEEP "D"	WIDE "W"	NO. OF DOORS	CASTER SIZE	SHIP WT. LBS. (KG)
CH-4-SK	4	4	8	8	8	4	8	4	8	30" (762)	39.25" (997)	27" (686)	1	5"	225 (101)
CH-4-SK-S NO CASTER MODEL	4	4	8	8	8	4	8	4	8	25" (635)	39.25" (997)	27" (686)	1	NO CASTERS	215 (97)
CH-6-SK	6	6	12	12	12	6	12	6	12	36" (914)	39.25" (997)	27" (686)	1	5"	370 (167)
CH-6-SK-S NO CASTER MODEL	6	6	12	12	12	6	12	6	12	31" (787)	39.25" (997)	27" (686)	1	NO CASTERS	360 (162)
CH-9-SK	9	9	18	18	18	9	18	9	18	45" (1143)	39.25" (997)	27" (686)	1	5"	380 (171)
CH-9-SK-S NO CASTER MODEL	9	9	18	18	18	9	18	9	18	40" (1016)	39.25" (997)	27" (686)	1	NO CASTERS	370 (167)

All rights reserved. All specifications subject to change without notice. Errors subject to correction. © 13 Food Warming Equipment Company, Inc.