



PROJECT:	MODEL:	QUANTITY:	ITEM NO:

# REFRIGERATED MOBILE BANQUET CABINETS

**Hold, Serve, and Transport Cold Foods**

“SR SERIES” and “RBQ SERIES”



SR-30

Shown with additional optional shelves



RBQ-96



SR-60

**Specifically designed engineered for transport applications for banquets, hotels, convention centers, institutions, and satellite operations.**



Built like no other refrigerator available, these units address the most demanding and punishing environments. Stationary or reach-in units are *not* made for transport or satellite operations. FWE's construction absorbs vibration and shock during transport and is specifically designed for harsh transport common in hotels, convention centers, institutions, catering and satellite delivery operations.

Our forced air “COLD-TEMP” system maintains a balanced temperature to keep chilled foods fresh and crisp for hours - designed to preserve the kitchen-freshness of your foods hours longer than any others on the market.

Exclusive “Food Sentry” easy-to-use controls offer the ultimate performance and accurate cabinet temperatures. Continuously intuitive self-defrosting cold system *with on demand override* make operation convenient and user friendly.


Banquet shelves accommodate stacked covered plates, plate carriers, or servings in pans and trays. For demanding banquet operations requiring banquet refrigeration, FWE is the “Choice of the Professionals”.

- ◇ Exclusive “Food Sentry” recessed electronic controls with digital display
- ◇ “Cold-Temp” system with automatic **Smart Defrost** with manual override
- ◇ All stainless steel
- ◇ All welded construction - no rivets
- ◇ Tubular stainless steel welded base frame
- ◇ Full extension bumper
- ◇ Heavy-duty polyurethane casters
- ◇ Heavy-duty hinges
- ◇ Positive close door latch
- ◇ Heavy-duty push bar handles
- ◇ Gasket sealed doors
- ◇ Fully insulated throughout
- ◇ Rod-style removable shelves
- ◇ Two year limited warranty

PROJECT:	MODEL:	QUANTITY:	ITEM NO:
----------	--------	-----------	----------



# SPECIFICATIONS:

# REFRIGERATED BANQUET CABINETS



**Refer to Section 1 for additional Banquet Cabinets and back-up support.**


DOOR SWING: 32"

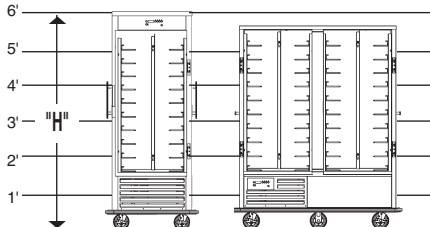

SR-30 Refrigerator SF-30 Freezer      SR-60 Refrigerator SF-60 Freezer

**SR Models:**  
Shelves can conveniently slide in and out. Shelf rack assembly at fixed spacings of 7.25" (184 mm).

**SR-60 Combination:**  
Shelf Rack Assembly is interchangeable with Tray Slide Assembly for bulk foods. SR-60 may be ordered with one side with Shelves, other side with Tray Slides.




RBQ-96

ELECTRICAL DATA				
	SR-30	SR-60 SF-60	RBQ-96	SF-30
VOLTS	120	120	120	120
WATTS	720	1020	817	900
AMPS	6	8.5	6.8	7.5
HERTZ	50/60	50/60	50/60	50/60
PHASE	Single	Single	Single	Single
NEMA PLUG	5-15P			

Dedicated circuit.


### PERFORMANCE VALUES FOR REFRIGERATORS



<b>PRECOOL</b>	75°F to 35°F APPROX. 25 MIN.
<b>RECOVERY</b>	60°F to 35°F APPROX. 15 MIN.

Precool Time is based on interior cabinet at 75°F. Values are for smallest model listed.

### PERFORMANCE VALUES FOR FREEZERS



<b>PRECOOL</b>	75°F to 15°F APPROX. 35 MIN.
<b>RECOVERY</b>	40°F to 15°F APPROX. 15 MIN.

Precool Time is based on interior cabinet at 75°F. Values are for smallest model listed.

MODEL NUMBER	COVERED PLATE DIAMETER	COVERED PLATE HEIGHT	COVERED PLATE CAPACITY	SHELF SIZE (mm)	SHELF CLEARANCE (mm)	NUMBER OF SHELVES	OVERALL EXTERIOR DIMENSIONS IN. (mm)			NO. OF DOORS	CASTER SIZE	SHIP WT. LBS. (KG)
							HIGH "H"	DEEP "D"	WIDE "W"			
SR-30 Refrigerator	10.75"	2.625"	60	20.25" x 27.5" (514 x 699)	14.5" (368)	3	73.5" (1867)	36.5" (927)	31.25" (794)	1	6"	415 (189)
SR-60 Refrigerator	10.75"	2.625"	120	20.25" x 27.5" (514 x 699)	14.5" (368)	6	73.5" (1867)	36.5" (927)	57.5" (1460)	2	6"	605 (274)
RBQ-96 Refrigerator	11"	2.625"	96	22.25" x 44.375" (514 x 699)	13.7" (348)	3	72.5" (1841)	32.5" (825)	53" (1346)	2	6"	540 (244)
SF-30 Freezer	10.75"	2.625"	60	20.25" x 27.5" (514 x 699)	14.5" (368)	3	73.5" (1867)	36.5" (927)	31.25" (794)	1	6"	415 (189)
SF-60 Freezer	10.75"	2.625"	120	20.25" x 27.5" (514 x 699)	14.5" (368)	6	73.5" (1867)	36.5" (927)	57.5" (1460)	2	6"	605 (274)

SR and SF models are available with the Pass-thru Door [add "P"] and/or Dutch Doors [add "D"]. Dutch Door: 2 half size doors. SR and SF model shelves are adjustable at 7.25" spacings.

- SR-30 CAPACITY: 60 Covered Plates 4 Plates stacked 5 high per shelf 3 Adjustable Shelves @ 7.25" spacings.
- SR-60 CAPACITY: 120 Covered Plates 4 Plates stacked 5 high per shelf 6 Adjustable Shelves @ 7.25" spacings.
- RBQ-96 CAPACITY: 96 Covered Plates 8 Plates stacked 4 high per shelf 3 Shelves @ 13.7" spacings.
- SF-30 CAPACITY: 60 Covered Plates 4 Plates stacked 5 high per shelf 3 Adjustable Shelves @ 7.25" spacings.
- SF-60 CAPACITY: 120 Covered Plates 4 Plates stacked 5 high per shelf 6 Adjustable Shelves @ 7.25" spacings.

Other shelf spacings are available. Consult factory.

**CONSTRUCTION.** Heliarc welded, single unit construction of stainless steel; 20-gauge polished exterior, 22-gauge stainless steel interior with easy-to-clean coved corners. Welded tubular stainless steel base frame shall be 1" square, heavy gauge stainless steel tubing, with 10-gauge stainless steel reinforcing stress plates at corners.  
**INSULATION.** "Ultra-Guard" UG-26 high density fiberglass and foam insulation throughout.  
**PUSH BAR HANDLES.** Heavy-duty, solid formed 1" x .375" thick; mounted at each end of unit. Mountings reinforced with stainless steel channel.  
**BUMPER.** Solid 1.5" wide continuous wraparound aluminum channel, bolted to frame, with snap-in, non-marking replaceable vinyl cushion. Full perimeter bumper extends beyond doors, handles, etc., for added protection. Shall be continuous, with corner cut-outs to facilitate cleaning.  
**DOORS AND LATCHES.** Flush mounted, stainless steel insulated doors. High temperature gasket sealed; gasket shall be cabinet mounted.

Each door shall have two (2) heavy-duty edgemount die cast hinges. Doors shall have edgemounted and full grip door latches. The hinge and latch mountings are reinforced with stainless steel backing plates.  
**CASTERS.** Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. Double door units have 6 casters in a configuration of two (2) rigid and four (4) swivel with brake. Casters shall have a reinforced yoke mounted to 10-gauge caster plate. The caster mounting plate shall be secured to a 10-gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.  
**SHELVES.** Triple plated, welded rod-type shelves shall be removable. Shelves are polymer coated, tested and approved to meet the NSF International Corrosion Resistance requirements under NSF Std 51/ASTM B117 Sections 6.2 and 6.2.1. SR Series shelves are adjustable on 7.25" spacings. RBQ Series shelves shall be supported by high strength, "no fall" 14-gauge die-formed stainless

steel brackets. Bottom shelf shall be equipped with "lift-up" hook for easy access to facilitate cleaning.  
**COLD-TEMP SYSTEM / CONTROLS.** Continuously intuitive defrost system with on demand override shall have heavy-duty fan circulation evaporator coil, 1/4 HP air-cooled closed system, Hi-torque condensing unit with thermal expansion valve, filter-dryer, pressure control and condensation lines and pan. System uses environmentally safe non-CFC refrigerant. Controls shall be up-front, recessed and shall include a digital display of cabinet temperature (with recall capability of temperature set point and actual cabinet temp), master ON/OFF switch with power indicator light, cycle indicator light, and ON DEMAND DEFROST with indicator light.  
**Refrigerators:** Adjustable temperature 34°F to 40°F (1°C to 4°C) preset at 38°F (3°C).  
**Freezers:** Adjustable temperature 5°F to 32°F (-15°C to 0°C) preset at 15°F (-9.4°C).  
**ELECTRICAL CHARACTERISTICS.** 3 wire grounded 10 foot extension power cord and plug, side mounted for safety. See chart above for amperage and receptacle configuration. Dedicated circuit.

### Optional Accessories:

- 220 volt, 50/60 Hz, single phase
- CE compliant
- Cold plate cartridge
- Dutch doors
- Pass-thru door
- Glass door
- Key locking door latch
- Magnetic latch
- Paddle latch
- Padlocking transport latch
- Left hand door hinging
- Security packages
- All swivel or larger casters
- Door edge trim
- Floorlock (requires 6" casters)
- Extra shelves
- SR-60 combination shelves/slides

**FWE Products are used by major companies world-wide. We can modify, design, or custom build equipment to fit your special requirements.**



### Food Warming Equipment Company, Inc.

P.O. Box 1001  
Crystal Lake, IL 60039 USA  
800-222-4393; 815-459-7500  
Fax: 815-459-7989

Manufacturing Facilities:  
7900 S. Route 31  
Crystal Lake, IL 60014 USA  
www.FWE.com sales@fweco.net

FWE products may be covered under one or more of the following U.S. patents: 288,299;238,300;3,952,609;4,192,991.  
All specifications subject to change without notice.  
© 13H Food Warming Equipment Company, Inc.