



Profit from the Eagle Advantage®


Specification Sheet

Short Form Specifications


Eagle RedHots® Heat Lamp, model _____. Extruded aluminum exterior housing, with interior aluminized reflector plate to focus heat. Available in standard or high wattage. Units with lights have 60-watt incandescent bulbs with shatter-proof Teflon coating, with dedicated switch. All units have toggle switch with indicator light per heating element. When ordering remote, please specify if toggle or infinite switch is needed.



heat lamp without lights



toggle switch box

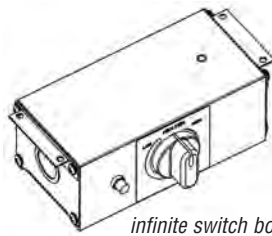

infinite switch box

Remote Switch Boxes for Heat Lamps

See back page for all Heat Lamp model #s.

applicable heat lamps	heat lamp lengths*		TOGGLE SWITCH BOXES		INFINITE SWITCH BOXES		
	in.	mm	FOR 120V*, 208V, and 240V HEAT LAMPS	model #	FOR 120V * HEAT LAMPS	FOR 208V HEAT LAMPS	FOR 240V HEAT LAMPS
standard-watt units without lights (heat lamp model #s with suffix -R)	18" - 96"	457 - 2438		410301	411182	411172	410302
	108"-144"	2743 - 3658		410303	411184	411174	410304
standard-watt units with lights (heat lamp model #s with suffix -L-R)	18" - 96"	457 - 2438		410308	411185	411175	410305
	108"-144"	2743 - 3658		410306	411187	411177	410307
high-watt units without lights (heat lamp model #s with suffix -H-R)	18" - 60"	457 - 1524		410301	411182	411172	410302
	66" - 144"	1676 - 3658		410303	411184	411174	410304
high-watt units with lights (heat lamp model #s with suffix -H-L-R)	18" - 60"	457 - 1524		410308	411185	411175	410305
	66" - 144"	1676 - 3658		410306	411187	411177	410307

* 120-volt heat lamps available up to 108"-length.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440

MHC/Retail Display Divisions: Phone 800-637-5100

For custom configuration or fabrication needs, contact our SpecFAB® Division.

Phone: 302-653-3000 • Fax: 302-653-3091 • e-mail: specfab@eaglegrp.com

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

RedHots® Heat Lamps

MODELS:

- RHHL-18-240-* RHHL-48-240-* RHHL-84-240-*
- RHHL-24-240-* RHHL-54-240-* RHHL-96-240-*
- RHHL-30-240-* RHHL-60-240-* RHHL-108-240-*
- RHHL-36-240-* RHHL-66-240-* RHHL-120-240-*
- RHHL-42-240-* RHHL-72-240-* RHHL-132-240-*
- RHHL-144-240-*

* See charts on back for complete model numbers.

Design and Construction Features

- 120V, 208V, and 240V units available.
- Standard and high-watt units offered.
- Units with lights feature 60-watt incandescent bulbs with shatter-proof Teflon coating. Incandescent lights have dedicated switch.
- Exterior extrusion constructed of #6063 aluminum.
- Interior with aluminized reflector plate to focus heat.
- Each heating element controlled individually via toggle switch with indicator light.
- Heat lamps can be attached with stainless steel brackets or hung from the ceiling using hanging tabs.
- Optional remote switch box available with toggle switch or infinite switch. All switches come with indicator light (see chart below for applicable Remote Switch Box, see back page for all Heat Lamps).

Certifications / Approvals



AUTOQUOTES




Spec sheets available for viewing, printing or downloading from our online literature library at www.eaglegrp.com



Profit from the Eagle Advantage®

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

RedHots® Heat Lamps

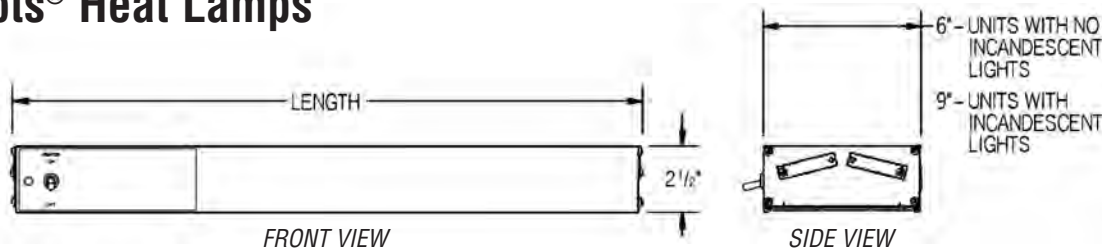

Standard- and High-Watt Units

STANDARD WATT, WITHOUT INCANDESCENT LIGHTS		STANDARD WATT, WITH INCANDESCENT LIGHTS		HIGH WATT UNITS, WITHOUT INCANDESCENT LIGHTS		HIGH WATT UNITS, WITH INCANDESCENT LIGHTS		length		voltage**
model #	wattage	model #	wattage*	model #	wattage	model #	wattage*	in.	mm	
RHHL-18-240	250W	RHHL-18-240-L	310W	RHHL-18-240-H	350W	RHHL-18-240-H-L	410W	18"	457	240V
RHHL-24-240	350W	RHHL-24-240-L	470W	RHHL-24-240-H	500W	RHHL-24-240-H-L	620W	24"	610	240V
RHHL-30-240	450W	RHHL-30-240-L	570W	RHHL-30-240-H	660W	RHHL-30-240-H-L	780W	30"	762	240V
RHHL-36-240	575W	RHHL-36-240-L	755W	RHHL-36-240-H	862.5W	RHHL-36-240-H-L	1042.5W	36"	914	240V
RHHL-42-240	675W	RHHL-42-240-L	855W	RHHL-42-240-H	1025W	RHHL-42-240-H-L	1205W	42"	1067	240V
RHHL-48-240	800W	RHHL-48-240-L	1040W	RHHL-48-240-H	1200W	RHHL-48-240-H-L	1440W	48"	1219	240V
RHHL-54-240	925W	RHHL-54-240-L	1165W	RHHL-54-240-H	1250W	RHHL-54-240-H-L	1490W	54"	1372	240V
RHHL-60-240	1050W	RHHL-60-240-L	1350W	RHHL-60-240-H	1400W	RHHL-60-240-H-L	1700W	60"	1524	240V
RHHL-66-240	1160W	RHHL-66-240-L	1460W	RHHL-66-240-H	1560W	RHHL-66-240-H-L	1860W	66"	1676	240V
RHHL-72-240	1275W	RHHL-72-240-L	1635W	RHHL-72-240-H	1725W	RHHL-72-240-H-L	2085W	72"	1829	240V
RHHL-84-240	1500W	RHHL-84-240-L	1920W	RHHL-84-240-H	2050W	RHHL-84-240-H-L	2470W	84"	2134	240V
RHHL-96-240	1725W	RHHL-96-240-L	2205W	RHHL-96-240-H	2400W	RHHL-96-240-H-L	2880W	96"	2438	240V
RHHL-108-240	1850W	RHHL-108-240-L	2330W	RHHL-108-240-H	2500W	RHHL-108-240-H-L	2980W	108"	2743	240V
RHHL-120-240	2100W	RHHL-120-240-L	2640W	RHHL-120-240-H	2800W	RHHL-120-240-H-L	3340W	120"	3048	240V
RHHL-132-240	2320W	RHHL-132-240-L	2920W	RHHL-132-240-H	3120W	RHHL-132-240-H-L	3720W	132"	3353	240V
RHHL-144-240	2550W	RHHL-144-240-L	3210W	RHHL-144-240-H	3450W	RHHL-144-240-H-L	3810W	144"	3658	240V

Standard- and High-Watt Units with Remote (Note: When ordering, please specify if unit needs toggle or infinite switch.)

STANDARD WATT, WITHOUT INCANDESCENT LIGHTS		STANDARD WATT, WITH INCANDESCENT LIGHTS		HIGH WATT UNITS, WITHOUT INCANDESCENT LIGHTS		HIGH WATT UNITS, WITH INCANDESCENT LIGHTS		length		voltage**
model #	wattage	model #	wattage*	model #	wattage	model #	wattage*	in.	mm	
RHHL-18-240-R	250W	RHHL-18-240-L-R	310W	RHHL-18-240-H-R	350W	RHHL-18-240-H-L-R	410W	18"	457	240V
RHHL-24-240-R	350W	RHHL-24-240-L-R	470W	RHHL-24-240-H-R	500W	RHHL-24-240-H-L-R	620W	24"	610	240V
RHHL-30-240-R	450W	RHHL-30-240-L-R	570W	RHHL-30-240-H-R	660W	RHHL-30-240-H-L-R	780W	30"	762	240V
RHHL-36-240-R	575W	RHHL-36-240-L-R	755W	RHHL-36-240-H-R	862.5W	RHHL-36-240-H-L-R	1042.5W	36"	914	240V
RHHL-42-240-R	675W	RHHL-42-240-L-R	855W	RHHL-42-240-H-R	1025W	RHHL-42-240-H-L-R	1205W	42"	1067	240V
RHHL-48-240-R	800W	RHHL-48-240-L-R	1040W	RHHL-48-240-H-R	1200W	RHHL-48-240-H-L-R	1440W	48"	1219	240V
RHHL-54-240-R	925W	RHHL-54-240-L-R	1165W	RHHL-54-240-H-R	1250W	RHHL-54-240-H-L-R	1490W	54"	1372	240V
RHHL-60-240-R	1050W	RHHL-60-240-L-R	1350W	RHHL-60-240-H-R	1400W	RHHL-60-240-H-L-R	1700W	60"	1524	240V
RHHL-66-240-R	1160W	RHHL-66-240-L-R	1460W	RHHL-66-240-H-R	1560W	RHHL-66-240-H-L-R	1860W	66"	1676	240V
RHHL-72-240-R	1275W	RHHL-72-240-L-R	1635W	RHHL-72-240-H-R	1725W	RHHL-72-240-H-L-R	2085W	72"	1829	240V
RHHL-84-240-R	1500W	RHHL-84-240-L-R	1920W	RHHL-84-240-H-R	2050W	RHHL-84-240-H-L-R	2470W	84"	2134	240V
RHHL-96-240-R	1725W	RHHL-96-240-L-R	2205W	RHHL-96-240-H-R	2400W	RHHL-96-240-H-L-R	2880W	96"	2438	240V
RHHL-108-240-R	1850W	RHHL-108-240-L-R	2330W	RHHL-108-240-H-R	2500W	RHHL-108-240-H-L-R	2980W	108"	2743	240V
RHHL-120-240-R	2100W	RHHL-120-240-L-R	2640W	RHHL-120-240-H-R	2800W	RHHL-120-240-H-L-R	3340W	120"	3048	240V
RHHL-132-240-R	2320W	RHHL-132-240-L-R	2920W	RHHL-132-240-H-R	3120W	RHHL-132-240-H-L-R	3720W	132"	3353	240V
RHHL-144-240-R	2550W	RHHL-144-240-L-R	3210W	RHHL-144-240-H-R	3450W	RHHL-144-240-H-L-R	3810W	144"	3658	240V

* Total wattage includes the output of the lights.

** 120V or 208V voltage available. To order, replace "-240" in model number with "-120" or "-208" (example: RHHL-30-120). Note: 18" to 108" (457 to 2743mm)-long units available in 120V, 208V, or 240V voltage. 120" to 144" (3048 to 3658mm)-long units available in 208V or 240V only.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440

MHC/Retail Display Divisions: Phone 800-637-5100

Printed in U.S.A.

©2011 by Eagle Group

Rev. 09/11

Spec sheets available for viewing, printing or downloading from our online literature library at www.eaglegrp.com

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.