



BLAST CHILLER
(Roll-In, Remote Refrigeration)
Model: AP20BC175-2

JOB _____

ITEM # _____

QTY. REQUIRED _____

AIA FILE # _____

SPEC # _____

SPECIFICATIONS

SCOPE: This specification covers the model AP20BC175-2 HurriChill™ Blast Chiller. This unit consists of a chilling cabinet complete with all required controls and accessories. Remote condensing unit sold separately. Several options are also available.

GENERAL: The microprocessor control system provides a choice of operating cycles: soft chilling, hard chilling, holding, and sterilizing. **A total of four food probes are provided for accurate control of temperature within the product. A built-in strip recorder provides a record of the unit's operating parameters during the cycle and the following holding period.** The cabinet is sized to accommodate one mobile rack (not included) to hold 12" x 20" x 2-1/2" deep food pans or 18" x 26" sheet pans (pans not included).

PERFORMANCE: Blast chilling (soft or hard) lowers the food core temperature from 160°F to 38°F within 90 minutes. Chilling times will vary somewhat, depending on the food quantity, initial temperature, density, moisture content, specific heat, and type of container. The airflow has a high velocity, indirect pattern designed to cool all levels at identical rates. Time/temperature chilling rates meet or exceed all FDA and state regulations.

CONSTRUCTION: The chilling cabinet is constructed of polished type 304 stainless steel, with 3-1/4" of CFC-free, high density polyurethane insulation. The interior corners are fully rounded. The door is equipped with a removable magnetic gasket. All motors are sealed ball bearing wash-down type. The cabinet floor is insulated (1/2" CFC-free high density polyurethane) and is provided with an integral 3" long ramp to facilitate access. A minimum 15" clear space is required above the cabinet for service. A minimum 6" clear space is required on the control panel side of the cabinet for service. A minimum 12" clear space is required on the hinge side of the cabinet for door opening. The door is hinged on operator's left.

REFRIGERATION SYSTEM: The refrigeration system, as furnished by manufacturer, is complete with all components, including controls, evaporator and blower system. The evaporator is of the forced convection type and designed specifically for blast chilling operation. Air circulation motors, multi-fin and tube type coils, and fan guards are contained within the cabinet. Also included in the cabinet are the liquid line solenoid valve, thermostatic expansion valves, the inlet and outlet connections, and a drain connection. Access to the evaporator for cleaning shall be via a convenient hinged, swing-out ventilator panel. Fan motors have inherent overload protection and the fan blades are guarded to prevent injury.

MICROPROCESSOR CONTROL SYSTEM: The solid state electronic control panel is user friendly, easy to reach, and can be set for automatic or manual operation. The core food probes continuously measure the product temperature during the chilling cycle. Easy to read VFD display and buzzer alarm are standard features. All settings are programmable by the operator. The standard operating cycles include the following:

- Soft Chilling:** The air temperature is held in the range of 28°F to 35°F, ideal for delicate food items. The chilling cycle is completed when the food core temperature reaches 38°F to 40°F.



- Hard Chilling:** The air temperature is lowered to 0°F. When the food core temperature reaches 60°F, the air temperature rises to a range of 28°F to 35°F. The chilling cycle is completed when the food core temperature reaches 38°F to 40°F.
- Thawing (Optional):** Air temperature is carefully monitored and alternates between gentle heat and refrigeration to safely thaw food product.
- Holding:** At the end of any cycle (soft chilling or hard chilling), the unit will automatically switch to a holding mode which will keep the food at 38°F (chilled) until the **[START/STOP]** button is pressed to end the cycle. If the door is opened before pressing the **[START/STOP]** button, the holding mode will resume when the door is closed and continue until the **[START/STOP]** button is pressed.

ADDITIONAL FEATURES:

- Includes:** Strip data printer and total of four food probes.
- Defrost:** An automatic defrost cycle is factory preset and will initiate after each 24 hours of operation. A manual defrost override can be selected at any time at the user's discretion.
- Recipe Names:** Up to 150 recipe names can be programmed by the user.


BLAST CHILLER (Roll-In, Remote Refrigeration)
Model: AP20BC175-2



Details and Dimensions



BLAST CHILLER (Roll-In, Remote Refrigeration) Model: AP20BC175-2

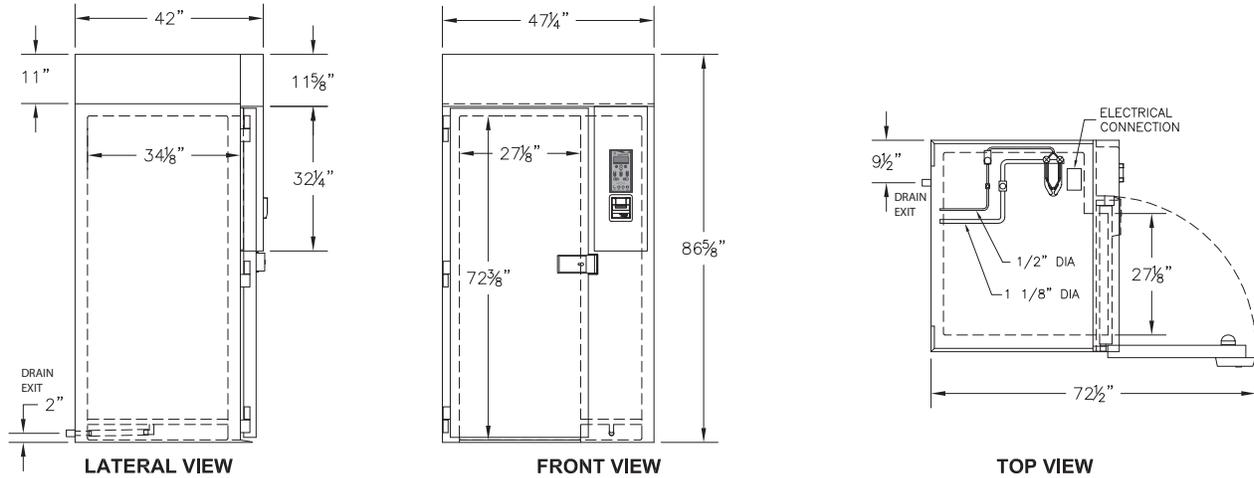

DIMENSIONS	OUTSIDE			INSIDE			DEPTH WITH DOOR OPENED	SHIPPING WEIGHT [LBS]
	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
AP20BC175-2	47-1/4"	42"	86-5/8"	27-1/8"	34-1/8"	72-3/8"	72-1/2"	1020

REFRIGERATION DATA	CAPACITY [BTU/H] AT: 14°F EVAP. TEMP 105°F COND. TEMP	REFRIGERANT	DISCHARGE LINE [IN] (UP TO 60 FT)	SUCTION LINE [IN] (UP TO 60 FT)	CONDENSING UNIT (OPTIONAL)
MODEL					
AP20BC175-2	25,000	404A	1/2	1-1/8	MEDIUM TEMP 40°F TO -10°F

MODEL	MAXIMUM LOAD PER CYCLE [LBS]		REFRIGERATION ELECTRICAL					COMPRESSOR HP
	CHILL	FREEZE	VOLTS	PH.	HZ.	AMPS	NEMA	
AP20BC175-2	200	N/A	208/1	1	60	15	N/A	4.0

OPTIONS:

- Sterilizing:** The ultraviolet system sterilizes all metal surfaces within the cabinet in a preset time of 30 minutes. The mirror finish of the cabinet interior is specifically designed to optimize the performance of the UV cycle. The system is not intended to sterilize food.
- Printer (Standard):** A strip recorder provides a record of the unit's operating parameters during a cycle and the following holding period. The information recorded includes date, time, cycle identification, recipe name, and product core temperature at prescribed intervals.
- Label Printer:** Clearly label food product with a product name and information regarding the product's life cycle throughout the entire chilling/freezing process.
- Four Non-Heated Food Probes (Standard)**
- Automated Report Documentation (ARD) Software Package:** Allows for complete two-way communication between the unit and a remote PC. Supported functions include programming, system diagnostics, operation, and downloading of data for HACCP compliance.
- Thaw Cycle Module:** Allows the unit to be used as a thaw cabinet and includes a non-heated thaw probe.
 - Automatic Mode:** Air temperature is controlled by monitoring the food product using a non-heated probe. Once the product reaches 38°F the cycle is complete and the unit switches into holding mode.
- Mobile Racks**
- Rear Door:** For pass-through operation (increases depth by 3")
- Prison Security Package**
- Air Cooled Remote Condensing Unit**
- Water Cooled Remote Condensing Unit**

INSTALLATION: A detailed installation manual is provided. It must be carefully followed to ensure proper operation and to protect your rights under the warranty.

WARRANTY: The warranty covers all parts found to be defective and the labor required to replace them for a period of one year from the date of shipment.

