

Item No.

## The Anets Pasta Pro Is A Safe, Simple Way To Make Perfectly Cooked Pasta

Anets offers a safe, consistent and easy way to make traditional pasta. This self-contained system eliminates handling heavy pots and hot water. Quick, efficient heating system brings fresh water to a boil in less than 10 minutes. Super sensitive thermostat accurately controls the temperature from a soft simmer to a hard boil. Cook more than just pasta, blanch vegetables, boil seafood or reheat sauces in this all-purpose water cooker. Add features like a timer, and automatic lift. To assure product consistency. Attach a rinse station and faucet for a complete pasta station.

### STANDARD FEATURES

- Cook pot is made of special marine grade stainless steel specifically for water applications
- Open vat design is easy to clean
- Unique cross fire burners provide a 4 sided heating system
- Special copper flashed heat exchangers transfer heat directly into the cookpot for maximum efficiency and instant recovery
- Super sensitive thermostat maintains water temperature within +/-1°F
- Built-in manual water-fill enables the operator to adjust water input for continuous refill (option). Manual water control eliminates the need for complicated floats and costly components
- Overflow area safeguards against accidental overflow
- Skimming area provides a place to continuously remove starch build up
- Front drain tray



**GPC-14 shown with optional adjustable continuous water fill, rinse station, hot and cold faucet, split bulk baskets and casters.**



# ANETS

ANETS INC PO BOX 501, CONCORD, NH 03302-0501  
509 ROUTE 3A, BOW, NH 03304 TEL: 603-225-6684, FAX:603-225-8497  
L10-520 R1 www.anets.com

We reserve the right to change specifications without notice and without incurring any Obligation for equipment previously or subsequently sold.

## SPECIFICATIONS

- Model
  - GPC-14, Basic
  - GPC-14A, Fully automatic single lift
- Certification
  - NSF, ETL
- BTUH
  - 111,000
- Gas Pressure
  - NG 3.5 WC, LP 10 WC
- Gas Connection
  - 3/4 NPT
- Electrical Requirements
  - GPC-14 120V, 60Hz, 1PH, 2Amps
  - GPC-14A 120V, 60Hz, 1PH, 5Amps
- Thermostat
  - Solid state
- Temperature Range
  - 190°F to 212°F (88°C-100°C)
  - 160°F to 212°F (71°C-100°C) (optional)
- Burners
  - Atmospheric pre-mix
- Hi-Limit
  - Safety control turns off main gas supply at 250°F (121°C)
- Safety Pilot
  - 100% gas shut off valve
- Pulse Ignitor
  - Battery Powered Ignitor
- Cookpot
  - Marine grade stainless steel
- Cabinet
  - Stainless steel
- Water Capacity
  - 8.5 gallons

## STANDARD ACCESSORIES

- Rack type basket support
- Front drain tray
- 6 Adjustable chrome plated legs


## OPTIONS AND ACCESSORIES

- Adjoining rinse station (RSF14)
- Hot and cold water faucets
- Adjustable continuous water fill
- Fully automatic single lift
- 15 minute timer with buzzer
- Batch and single portion baskets
- Low temperature thermostat for rethermalizing or blanching (160°F to 212°F) (71°C-100°C)
- 6 Casters


**NOTE: Baskets must be ordered separately**

## BASKETS


- Bulk
- Split bulk (Twin)
- 5<sup>3/4</sup>" Round
- Portion rack with (9) 10oz plastic portion cups

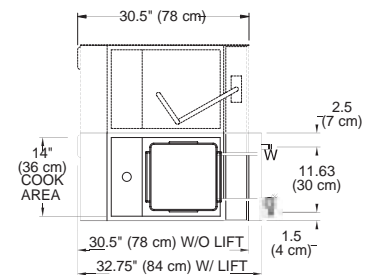

Top View

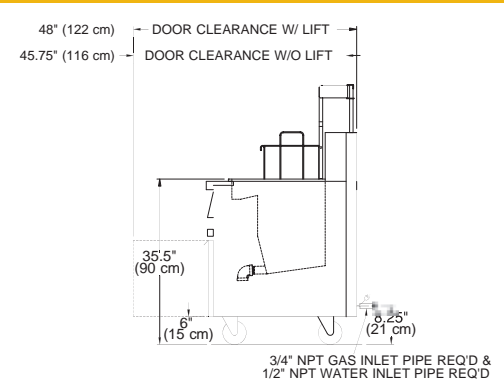

Side View

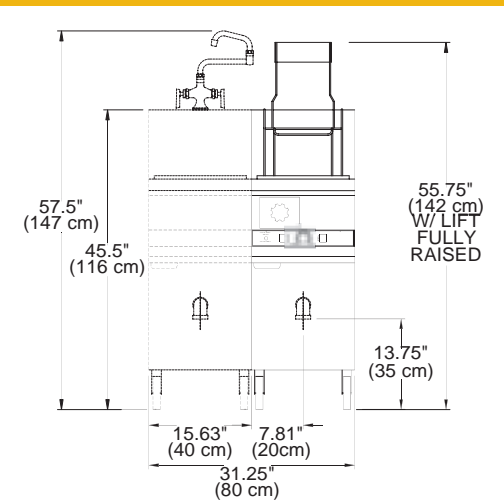

Front View

**Note: Diagrams include optional rinse station with faucet (RSF14)**

**Frypot has a 1 year warranty**



ANETS INC PO BOX 501, CONCORD, NH 03302-0501  
 509 ROUTE 3A, BOW, NH 03304 TEL: 603-225-6684, FAX:603-225-8497  
 L10-520 R1 www.anets.com

We reserve the right to change specifications without notice and without incurring any Obligation for equipment previously or subsequently sold.