




Item No. _____
 Project _____
 Quantity _____

Electric, Full-Size/Economy Convection Ovens

Models: [1/2/3]F6S

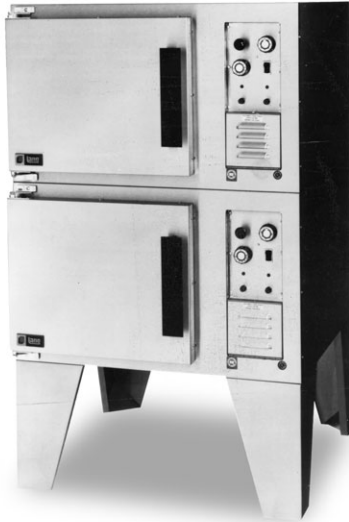

Model 2F6S shown, with optional angular legs

PAN CAPACITY GUIDE

Model/Pan Type:	18" x 26" Bake	12" x 20" x 4"
1F6S or F6S	6	3
2F6S	12	6
3F6S	18	9

SHORT/BID SPECIFICATION

Convection Oven[s] shall be **LANG Manufacturing Model** ____
[Insert 1, 2 or 3] F6S, a 6.6-kW [each] electric heated 6-pan full-size Economy Series unit, with: space saving 36" overall width; single solid, insulated door with magnetic closure; all stainless steel exterior and aluminized steel cooking compartment; powerful side mounted blower; and three pan racks standard; plus all the features listed and options/accessories checked:

STANDARD PRODUCT WARRANTY

- One year, parts & labor

CONSTRUCTION FEATURES

- Heavy duty 430 Series stainless steel exterior, with attractive No. 4 finish
- Fully enclosed oven back
- Cooking compartment is aluminized steel and fully insulated on six sides.
- Heavy duty solid, insulated door, with simple magnetic closure
- Powerful blower centered on the side of compartment
- Chrome steel six position pan slides with three chrome plated wire racks provided

PERFORMANCE FEATURES

- Narrow 36" width reduces hood space requirements
- Stackable up to three high, for more capacity in same footprint
- Solid, insulated door saves energy, keeps kitchen cooler
- 100-450°F operating temperature range

CONTROL PACKAGE

- Simple knob-set time and temperature controls
- 60 minute timer
- Manual vent rod
- Power-ON switch & indicator light




Sheet No. **LSP-C11** (rev. 7/03)

INSTALLATION REQUIREMENTS

- (E) 208V or 240V 1- or 3-Phase power required, or 480V, 3-Phase as option
- Installation under approved vent hood may be required. Consult local codes. [Power connection[s] from bottom. See below]

OPTIONS & ACCESSORIES

- 480 Volt, 3-phase model, per oven deck
- 27" stainless steel angular legs for 1F6S Model
- 16" stainless steel angular legs for 2F6S Model
- 6" stainless steel angular legs for 3F6S Model
- Stainless steel oven liner, per oven deck
- Extra wire pan racks [3 provided as std., per oven deck]

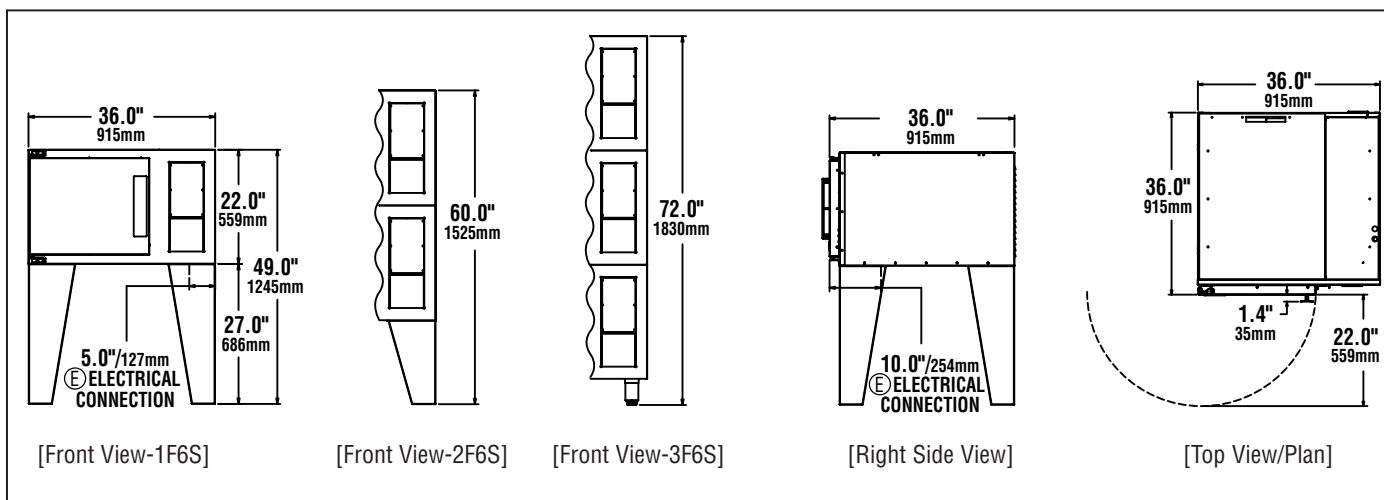

Model	Height x Width x Depth (without legs)	Clearance from combustible surface	Weight		Freight Class
			Actual	Shipping	
F6S	22.0" x 36.0" x 36.0" 559mm x 915mm x 915mm	Sides: 6" (153mm) Back: 6" (153mm) Floor: 6" (153mm)	235 lbs. 107 kg	275 lbs. 125 kg	85
1F6S	22.0" x 36.0" x 36.0" 559mm x 915mm x 915mm		260 lbs. 118 kg	300 lbs. 136 kg	85
2F6S	44.0" x 36.0" x 36.0" 1118mm x 915mm x 915mm		445 lbs. 202 kg	525 lbs. 239 kg	85
3F6S	66.0" x 36.0" x 36.0" 1676mm x 915mm x 915mm		640 lbs. 291 kg	760 lbs. 345 kg	85

Voltage	(E) Electrical Requirements By Model						
	Phase	Model F6S & 1F6S		Model 2F6S		Model 3F6S	
		Total kW	Amps/Line	Total kW	Amps/Line	Total kW	Amps/Line
208V/60Hz	1	6.6	31.7	13.2	63.5	19.8	95.2
240V/60Hz	1	6.6	27.5	13.2	55.0	19.8	82.5
208V/60Hz	3	n/a	n/a	13.2	55.0	19.8	55.0
240V/60Hz	3	n/a	n/a	13.2	47.6	19.8	47.6
480V/60Hz	3	6.6	13.8	13.2	23.8	19.8	23.8

CAD SYMBOLS & PRICING



Due to continuous improvements, specifications subject to change without notice.



Sheet No. LSP-C11 (rev. 7/03)

LANG MANUFACTURING COMPANY • 6500 Merrill Creek Parkway, Everett, WA 98203
TOLL FREE: 800.882.6368 • FAX: 425.349.2733 • www.langworld.com