



# ADVANTEDGE™ GLASS DOOR REFRIGERATORS



NLGR26H-B

NLGR48S-B

NLGR70H-B

PROJECT:

ITEM NUMBER:

MODEL NUMBER:

GLASS DOOR REFRIGERATORS

## SPECIFICATIONS FOR: NLGR26H-B, NLGR48S-B, NLGR70H-B

- **Finish:** White painted steel interior. Black painted steel exterior
- **Insulation:** 2" foamed-in-place polyurethane insulation
- **Hardware:** Four adjustable heavy duty vinyl-coated shelves (with product label strips) per door. Adjustable legs for leveling. Top panel backlit by fluorescent lights. Self closing doors with hold open feature. Interior fluorescent lights to illuminate product.
- **Door:** One and three door merchandisers are standard with swing style doors, two door merchandiser is standard with sliding doors. One and two door models have black doors; the three door model has silver doors.
- **Electrical:** 115 volt, 60 Hz, 1 phase with cord and plug
- **Refrigeration:** Complete bottom mounted refrigeration system with a copper tube, aluminum fin coated evaporator. The condensate is collected and automatically evaporated from an energy efficient air over wick style vaporizer. Drain line is recessed in cabinet back. Refrigerant flow is controlled by a capillary tube. R-134a refrigerant. Temperature range: +34°F to +38°F
- **Approvals:** UL, C-UL and ETL Sanitation \*\*

Note: This equipment is intended for storage and display of non-potentially hazardous bottled or canned products only.

### STANDARD FEATURES

- Air cooled condensing unit
- Automatic condensate vaporizer
- Automatic defrost
- Capillary tube system
- Cord and plug
- Door hold open feature
- Magnetic gaskets
- White painted steel interior
- Black painted steel exterior
- Sliding doors on two door model
- Swing style door on one and three door models
- Top backlit panel
- UL, C-UL and ETL sanitation
- Vinyl coated shelves
- Warranties: 3 year parts & labor, 5 year compressor


### OPTIONAL FEATURES\*

- Additional shelves
- White painted steel exterior



Nor-Lake, Inc.  
 Registered to ISO 9001:2008  
 File No. 10001816


\* Most options are available two weeks from receipt of order. Please contact us for specific questions.  
 \*\* C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.  
 \*\* UL Sanitation is Underwriters Laboratories Sanitation Mark which indicates that UL has tested the equipment to applicable NSF Standards.

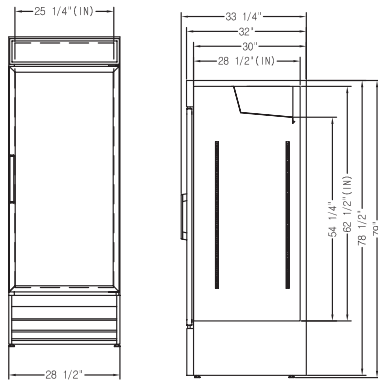


NLGR26H-B

FRONT


SIDE



NLGR26H-B



NLGR48S-B




NLGR70H-B

TOP VIEW

**SPECIFICATIONS**

<b>Models</b>	<b>NLGR26H-B</b>	<b>NLGR48S-B</b>	<b>NLGR70H-B</b>
<i>Crated Weight (lbs) (kg)</i>	353 (159)	476 (214)	696 (313)
<i>Crated Height (in) (cm)</i>	84-1/4 (211)	84-1/4 (211)	85-1/2 (214)
<i>Crated Width (in) (cm)</i>	27-3/4 (69)	53-3/4 (134)	78-3/8 (196)
<i>Crated Depth (in) (cm)</i>	33-7/8 (85)	32-7/8 (82)	34-1/4 (86)
<i>Interior Height (in) (cm)</i>	62-1/2 (156)	61-1/2 (154)	61 (153)
<i>Interior Width (in) (cm)</i>	25-1/4 (63)	50 (125)	74-1/4 (186)
<i>Interior Depth (in) (cm)</i>	28-1/2 (71)	25-1/2 (64)	27 (68)
<i>Overall Height (in) (cm)</i>	79 (198)	79 (198)	79 (198)
<i>Overall Width (in) (cm)</i>	28-1/2 (71)	53-1/4 (133)	78 (195)
<i>Overall Depth (in) (cm)</i>	33-1/4 (83)	30-3/4 (77)	33 (83)
<i>Gross Cubage (CuFt) (L)</i>	26 (736)	48 (358)	70 (175)
<i>Number of Shelves</i>	4	8	12
<i>Shelf Area (SqFt) (Sqm)</i>	26.3 (2.44)	44.5 (4.12)	69.4 (6.45)
<i>Number of Legs</i>	4	6	6
<i>Condensing Unit Size</i>	1/3 HP	3/5 HP	3/5 HP
<i>Refrigerant</i>	R-134a	R-134a	R-134a
<i>Electrical Characteristics</i>	115/60/1	115/60/1	115/60/1
<i>Cord and Plug Furnished</i>	Yes	Yes	Yes
<i>NEMA Plug Configuration</i>	5-15P	5-15P	5-15P
<i>Total Amp Draw</i>	3.9	9.5	11.9


Specifications subject to change without notice.

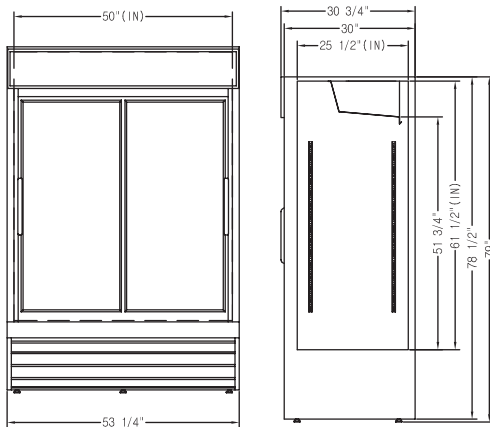

NLGR48S-B

FRONT

SIDE

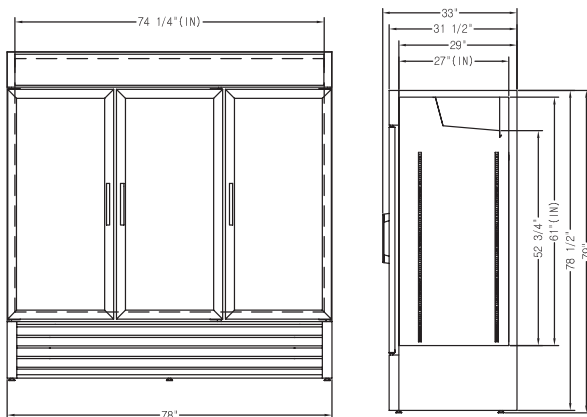

NLGR70H-B

FRONT

SIDE



**NORLAKE**