

## **ROYAL SERIES UNDERBAR**

### PASS THRU ICE BIN / CHILLMASTER BEER BIN

MODEL:	PROJECT:	_ ITEM #:	QTY:

## **PRODUCT IMAGES**



KRPT-2436 PASS THRU ICE BIN SHOWN



KR18-CB48 CHILLMASTER BEER BIN SHOWN

### **OPTIONAL ACCESSORIES**

KR-111	Condi	iment <sup>-</sup>	Tray for	Pass	Thru
175 446					

KR-112 Stainless Steel Large Divider for Pass Thru

KR-115 Stainless Steel Divider for Beer Bin

**KR-310** Right End Splash for Beer Bin

**KR-311** Left End Splash for Beer Bin

**KR-322** Partial Sliding Cover for Pass Thru (Using Bottle Wells)

**KR-323** Full Sliding Cover for Pass Thru (No Bottle Wells)

KR-BR1 Bottle Wells for Pass Thru

KR-401 Cap Catcher and Bottle Opener

KR-501 Towel Ring

KR-503 Crossbraced Casters (30" Working Height)

## STANDARD FEATURES

Interior (Both Units)

20 gauge stainless steel

Cold Plate (Pass Thru Only)

Cast aluminum post mix plate with 10 circuits. Plate is sealed into bottom. Each circuit is 5/16" OD stainless steel tubing. Two full with remainder to be half circuits. Bump and swedge fittings on ends

Front Apron

20 gauge stainless steel clad over 20 gauge galvanized steel

Backsplash (Beer Bin Only)

22 gauge stainless steel

Sides

20 gauge stainless steel

Backsplash (Beer Bin)

20 gauge stainless steel

Back and Bottom

20 gauge galvanized steel

Leas

1 5/8" tubular 16 gauge stainless steel with grey plastic bullet foot

Insulation

Foamed-in-place polyurethane

Plumbing

Cold Plate: 1/2" IPS drain connection No Cold Plate: 1" IPS drain connection



#### **APPROVED BY:**




# **ROYAL SERIES UNDERBAR**


## PASS THRU ICE BIN / CHILLMASTER BEER BIN

MODEL: PROJECT: ITEM #: QTY:

## **PASS THRU ICE BIN**

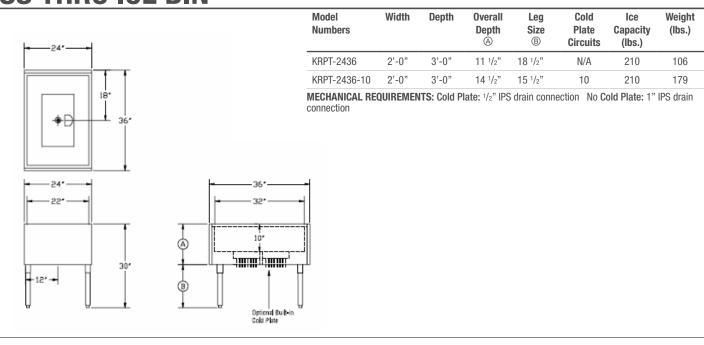

## CHILLMASTER BEER BIN

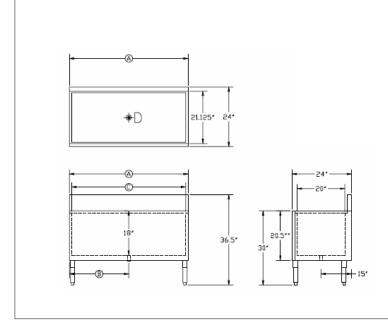

Model Numbers	Length	Left Side to Drain	Inside Bin Dimensions	Case Capacity	Weight (lbs.)
	A	B	©		
KR18-CB48	4'-0"	24"	20" x 46"	12	205
KR18-CB60	5'-0"	30"	20" x 58"	15	235
KR18-CB72	6'-0"	36"	20" x 70"	18	265

MECHANICAL REQUIREMENTS: 1" IPS drain connection



#### **APPROVED BY:**

Due to our commitment to continued product improvement, specifications are subject to change without notice. **CERTIFICATIONS:**