

B-50 CHAR BROILER

B-50 CHAR BROILER



Wells B-50 Countertop Broiler has a stainless steel top and sides that make this broiler one of the most durable in the industry. Self-cleaning elements are protected by heavy-duty cast-iron grates and provide two heat zones for flexibility in broiling.

Specifications

| | | |
|---------------------------------|---------------------|---------------------|
| Overall Dimensions: | Inches | MM |
| Width | 36 1/2 | 927 |
| Depth | 29 9/16 | 751 |
| Height (incl. 4" legs) | 15 3/8 | 391 |
| Grid Surface Dimensions: | | |
| Width | 32 | 813 |
| Depth | 20 | 508 |
| Area | 640 in ² | 0.41 m ² |
| Temperature Settings: | OFF/LO to HI | |
| Number of Controls: | 2 | |
| Pre-Heat Time to 600° F: | 10 minutes | |
| Typical Production | Per Load | Per Hour |
| Hamburgers | 50 | 700 |
| Steaks | 18 | 160 |
| Weights: | Lbs. | KG |
| Installed | 151 | 68 |
| Shipping | 159 | 72 |

Features


- **Each self-cleaning element** is positioned between the broiler grate ribs to protect against direct food contact and spatula abrasion. The elements also provide dual heating action (conductive and radiant).
- **Temperature** is regulated by infinite controls that have a positive-off position and signal lights to indicate a power-on condition.
- **Element frame** has a spring-loaded support rod to secure element when in a raised position.
- **Lift-out, drawn drip pans with handles** and removable **cast iron grates** allow fast and easy cleaning.
- **Individual controls** regulate one half of the grid surface area for cooking versatility and are mounted with a protective guard ring to help prevent accidental temperature changes.
- **A terminal block** is provided for field connection to the main power supply.
- Each unit is provided with a **grate scraper/brush and 4" adjustable metal legs**.
- **The B-50 Broiler** is Underwriters Laboratories, Inc. LISTED and meets NSF International standards.
- **A one-year warranty** against defects covers parts and labor.

Export

The following model is available for export and meets the standards for CE:

- B-50EU, 380-415V, 3Ø, 10800 watts






MODEL B-50 CHAR BROILER

DIMENSIONS:

INCH
(MM)

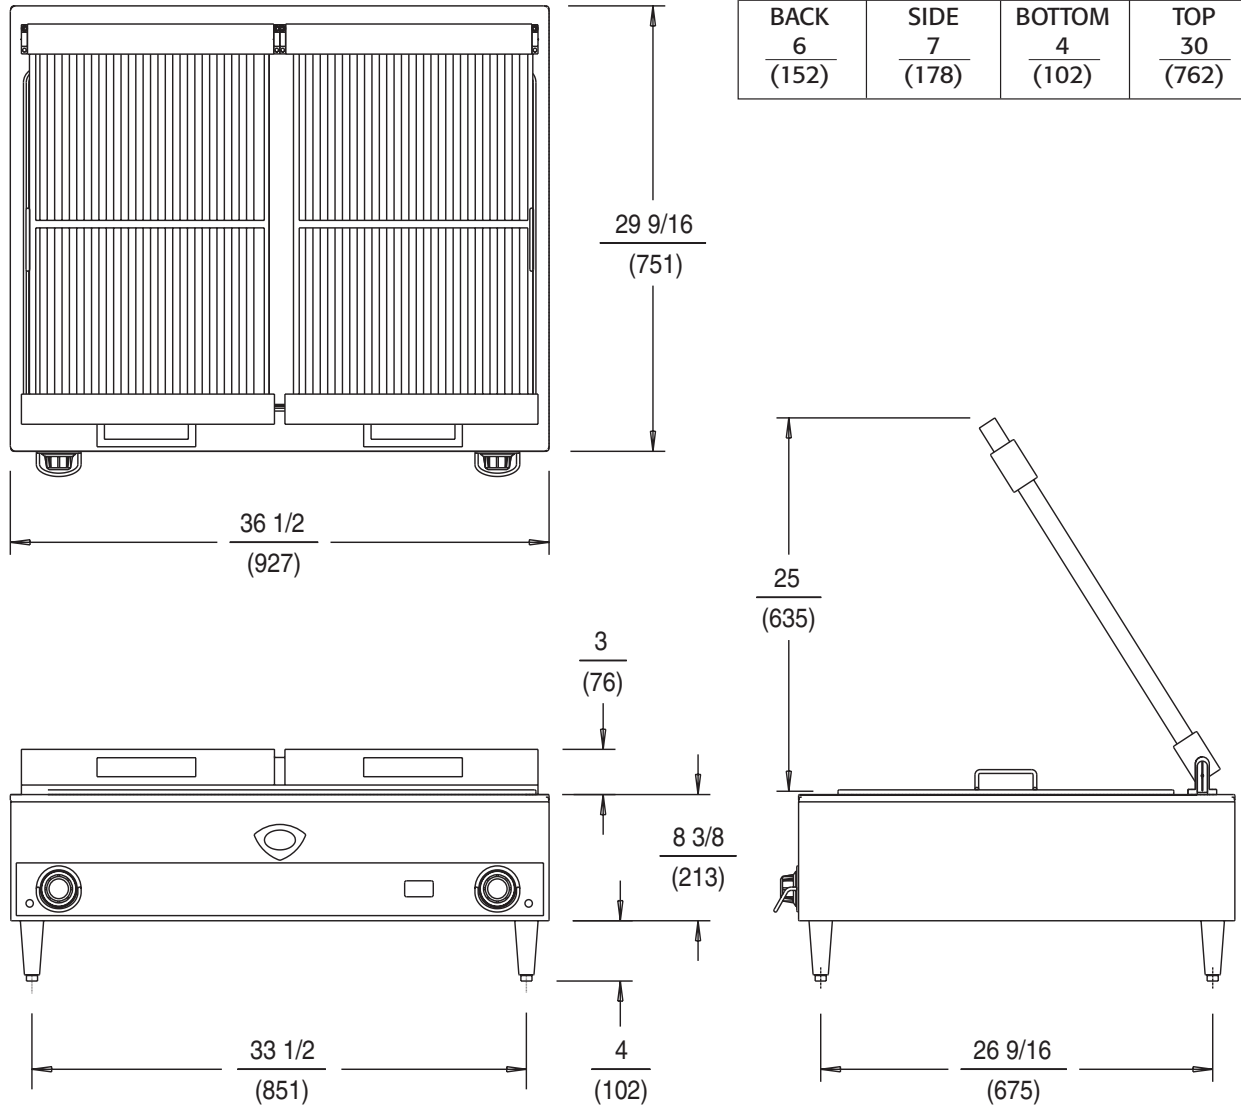

| MINIMUM CLEARANCE REQUIRED FROM UNIT TO THE NEAREST COMBUSTIBLE OBJECT. | | | |
|---|-------------------|-------------------|--------------------|
| BACK | SIDE | BOTTOM | TOP |
| $\frac{6}{(152)}$ | $\frac{7}{(178)}$ | $\frac{4}{(102)}$ | $\frac{30}{(762)}$ |

B-50 ELECTRICAL SPECIFICATIONS:

| MODELS | VOLTS | WATTS | AMPS PER LINE PHASE 3 | | | | AMPS SINGLE PHASE | POWER SUPPLY CORD |
|--------|---------|-------|-----------------------|------|------|---|-------------------|-------------------|
| | | | L1 | L2 | L3 | N | | |
| B-50 | 208 | 10800 | 30.0 | 30.0 | 30.0 | - | - | NONE |
| B-50 | 240 | 10800 | 26.0 | 26.0 | 26.0 | - | 45.0 | NONE |
| B-50EU | 380-415 | 10800 | 15.0 | 15.0 | 15.0 | - | - | NONE |

Denotes export (EU) products.

NOTE: Specifications are subject to change without notice.

