

G-23 GRIDDLE

G-23 GRIDDLE

G-23 shown with optional grooving



Wells G-23 Griddle is ideal for any commercial kitchen based on its versatile, easy-to-use design. In addition to the standard griddle surface there are two options to choose from, grooved or chrome-plated. The four positive-off thermostats allow individual zone control.

Specifications

Overall Dimensions:	Inches	MM
Width	36 1/2	927
Depth	29 9/16	751
Height	16	406

(incl. 4" legs & splashguard)

Grid Surface Dimensions:		
Width	34 1/4	870
Depth	24 5/16	618
Area	833 in ²	.54 m ²

Temperature Range:	Fahrenheit	Celsius
G-23	200° to 450°	93° to 232°

Number of Thermostats:	4
------------------------	---

Pre-Heat Time to 400° F:	9 minutes
--------------------------	-----------

Watts Per Hour to Maintain 400° F:	2,200
------------------------------------	-------

Typical Production:	Per Load	Per Hour
Hamburgers	65	720
Steaks	24	288
Pancakes*	48	720
Eggs*	56	1008

* Not applicable to grooved surface

Weights:	Lbs.	KG
Installed	204	93
Shipping	260	118

Features

- **Each individual thermostat** controls an eight and one half-inch wide cooking surface.
- **Enclosed tubular elements** are clamped onto the griddle plate to provide even heat distribution over the entire surface.
- **Removable splashguard** makes clean up easier.
- **The removable front grease drawer** has a four-quart capacity.
- **Controls** are mounted with a protective guard ring to help prevent accidental temperature changes.
- Each unit is provided with **4" adjustable legs**.
- **A terminal block** is provided for field connection to the main power supply.
- **The G-23 Griddle** is Underwriters Laboratories, Inc. LISTED and meets NSF International and Canadian standards.
- **A one-year warranty** against defects covers parts and labor.

Accessories / Options

Chrome-plated griddle surface, allows more efficient heat transfer throughout the cooking area, available by special order

Grooved griddle surface, 3/4-inch thick ribbed steel plate that allows for the "branding" of meat products, available by special order

Export

The following models are available for export and meet the standards for **CE**:

- **G-23EU**, 380-415V, 3NAC, 16000 watts
- **PG-23EU**, chrome plated, 380-415V, 3NAC, 16000 watts








MODEL G-23 GRIDDLE

DIMENSIONS:

INCH
(MM)

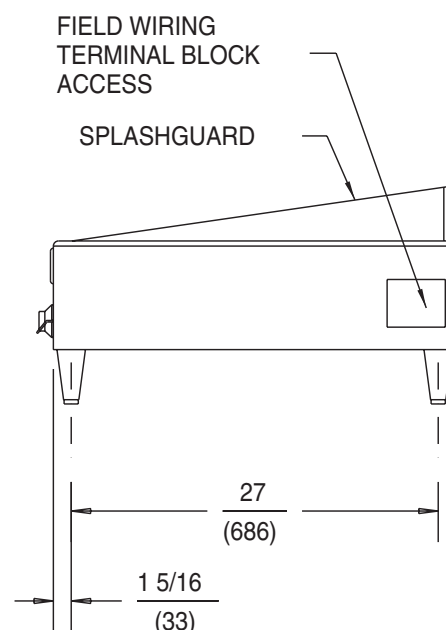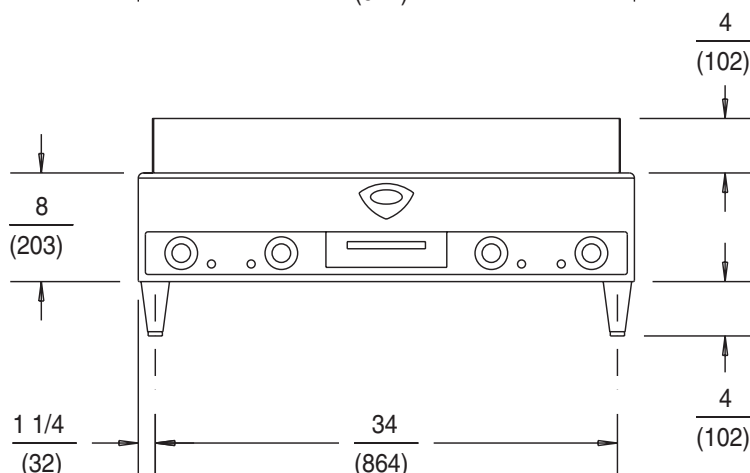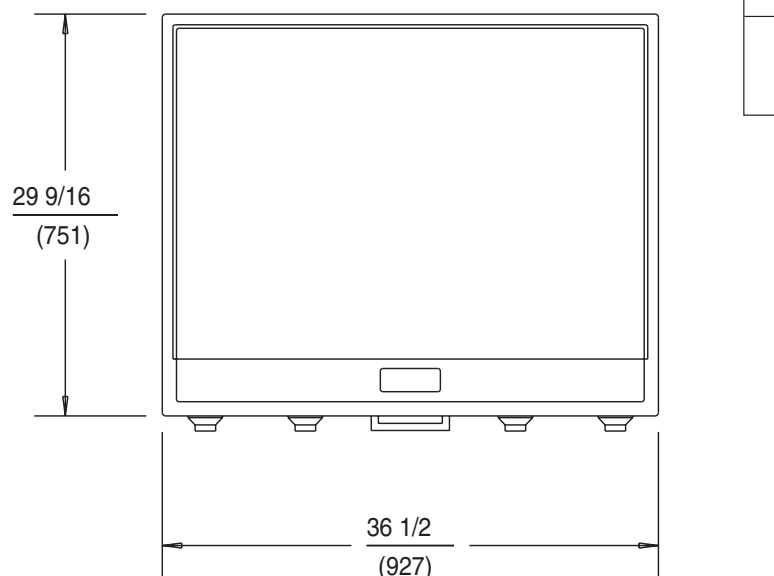

MINIMUM CLEARANCE REQUIRED FROM UNIT TO THE NEAREST SURFACE		
BACK	SIDE	BOTTOM
1 (25)	1 (25)	4 (102)

G-23 ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS PER LINE PHASE 3				AMPS SINGLE PHASE	POWER SUPPLY CORD
			L1	L2	L3	N		
G-23	208	16000	48.3	51.3	35.0	—	76.9	NONE
G-23	240	16000	41.7	44.4	30.4	—	66.6	NONE
G-23	480	16000	20.9	22.2	15.2	—	33.3	NONE
G-23EU	380-415	16000	15.8	31.6	19.2	38.6	—	NONE

Denotes export (EU) products.

NOTE: Specifications are subject to change without notice.

WELLS MANUFACTURING COMPANY

2 ERIK CIRCLE, PO BOX 280, VERDI, NV 89439 U.S.A. • USA PHONE: (775) 689-5700 • FAX: (775) 689-5972

FOR ORDERS ONLY: (888) 356-5362 • FAX: (800) 356-5142 • www.wellsbloomfield.com

© 2001 WELLS MANUFACTURING • PRINTED IN THE U.S.A. • 2/01 • REV(F) • PART NO. 38856

