



Over 90 Years Of Quality Foodservice
Products And Service

Job _____ Item No. _____

RCTS-4 Self-Contained Refrigerated Counter Top Server



Model RCTS-4
(food not included)

DESCRIPTION

Wells RCTS-4 is a self-contained refrigerated counter top system that is designed to hold toppings, condiments, or practically any food at NSF-7 safe temperatures. The RCTS includes cold-well refrigeration, foamed-in place insulation, stainless steel construction, 4 each easily removable pans, 1/2" feet and 4' cord & plug.

SPECIFICATIONS

Exterior – Wells RCTS features all stainless steel exterior construction, 1/2" – rubber feet, 4' cord & NEMA 5-15P plug with strain relief. Comes with 4-each easily removable 6"-deep 1/6th - size clear, polycarbonate inset pans with hinged lids and will accommodate any equivalent assortment of 2/3rd-size, 1/3rd - size, 1/6th -size or 1/9th -size pans.

Controls – Features adjustable temperature controls and lighted on/off rocker switch.

Refrigeration – RCTS is NSF-7 compliant @35° F product temperature utilizing a 1/6-HP compressor, 300 BTUH and R-134A refrigerant, 120V, 60 HZ.

STANDARD FEATURES

- Self-contained refrigeration system
- NSF-7 Compliant at 35° F product temperature
- Foamed-in-place insulation
- Stainless steel front, top and sides
- Includes 4-each removable 1/6th – size, 6" deep, clear, polycarbonate inset pans with hinged lids
- Accommodates equivalent 2/3rd-size, 1/3rd-size 1/6th-size or 1/9th-size pans.
- Includes adapter bar to support smaller fractional pans
- Pans are easily removable for ease of cleaning.
- 1/2" rubber feet
- 4' cord & NEMA 5-15P plug with strain relief
- 1/6-HP compressor @ 300 BTUH
- R-134 Refrigerant
- 120V, 60HZ.

OPTIONS & ACCESSORIES

- 5-year compressor Warranty (4 additional years)
- Stainless Steel night cover with handle.

CERTIFICATIONS



Sheet No. RCTS-05/14





Wells Bloomfield • 10 Sunnen Dr. St. Louis, MO 63143 U.S.A.
Phone : (314) 678-6314 • Fax (314) 781-5445
www.wellsbloomfield.com • Printed in the U.S.A.

NOTE: Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.



Over 90 Years Of Quality Foodservice Products And Service

RCTS-4 Self-Contained Refrigerated Counter Top Server

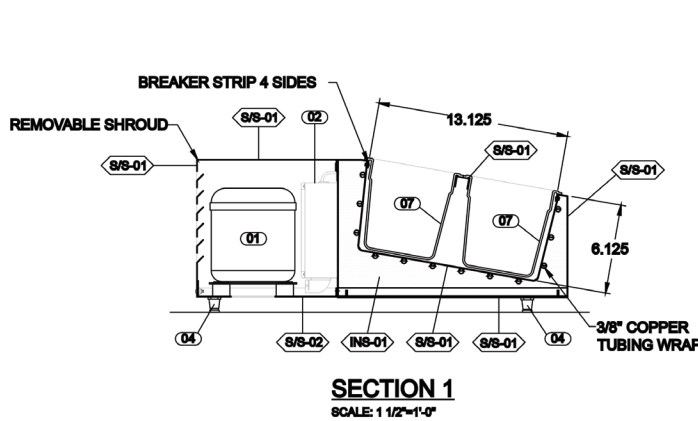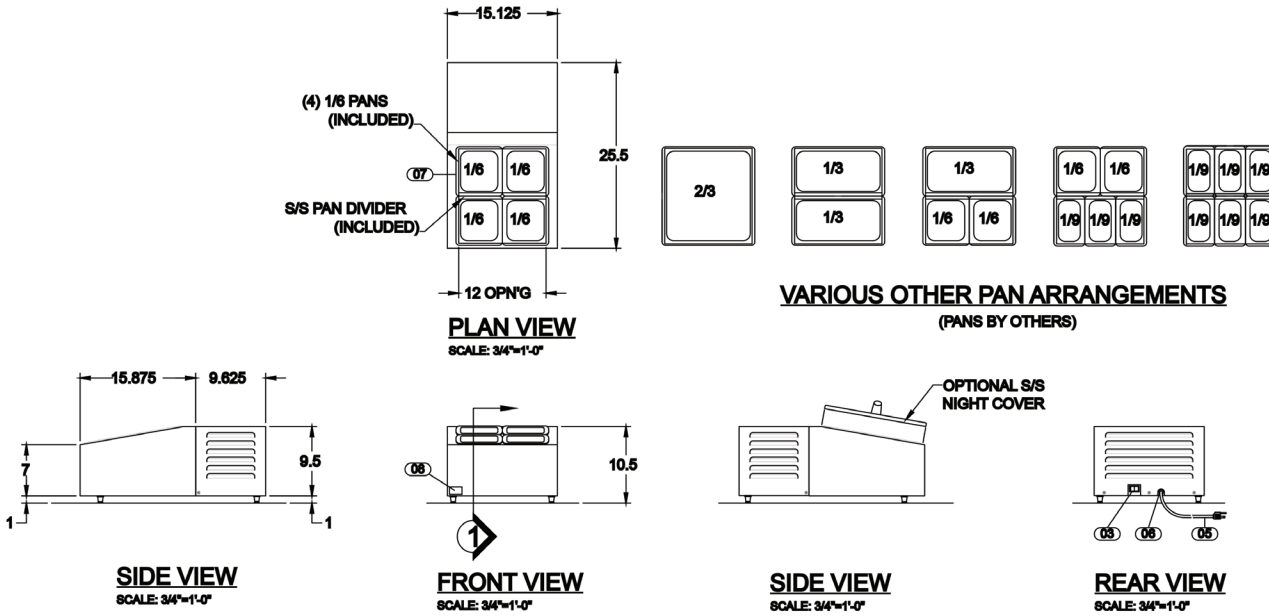

SYMBOL DETAILS

- 01 Compressor; 115V, 60 HZ, 300 BTUH, R-134A
- 02 Temperature Control
- 03 Lighted On/Off rocker Switch
- 04 Adjustable Feet with Rubber Toe
- 05 4' Power Cord with NEMA 5-15P Plug
- 06 Strain Relief
- 07 1/6th Size, 6" deep Poly Carbonate Inset Pans with Hinged Lids
- 08 Logo
- S/S-01 20 Gauge Stainless Steel
- S/S-02 16 Gauge Stainless Steel
- S/S-01 20 Gauge Stainless Steel
- S/S-01 16 Gauge Stainless Steel
- INS-01 Foamed-In-Place Polyurethane Insulation

| SPECIFICATIONS | | | | | | | | | | |
|----------------|---|----------------------------|---------|-------|------|------|-------|--------------|-------------|--------------------|
| Model No. | Overall Dimensions Inches mm | Opening Size | Voltage | Watts | HP | Amps | Phase | Power Supply | Refrigerant | Shipping Weight |
| RCTS-4 | 15-1/8"W x 25-1/2"L x 10-1/2"H 384mm x 648mm x 267mm | 12" x 12" 305mm x 305mm | 120V | 360 | 1/16 | 2 | 1 | NEMA 5-15P | 134-A | 70 lbs. 33.6 kg |

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Wells exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



Wells Bloomfield • 10 Sunnen Dr. St. Louis, MO 63143 U.S.A.
Phone: (314) 678-6314 • Fax (314) 781-5445
www.wellsbloomfield.com © 2012 Wells Bloomfield • Printed in the U.S.A.

NOTE: Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.