

# F-801M\_H-C

## MODULAR CUBELET ICE MACHINE

### SLIM-LINE SERIES

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_  
 \*AutoCad available on KCL

F-801M\_H-C


4/22/16

Item #13056


#### CUBELET DIMENSIONS

W x D x H


**F-801M\_H-C**  
 22 x 27<sup>3/8</sup> x 25<sup>15/16</sup>




B-300




B-500



B-700



B-800



B-900

Also available on Large Bins:


B-1150SS

B-1300SS

B-1500SS

B-1650SS

#### \*CUBELET DIMENSIONS



\*approximate size in inches, image not to scale




#### F-801MAH-C

Air-Cooled

Shown on an optional  
 B-500

#### F-801MWH-C

Water-Cooled

- Up to 728 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- CleanCycle I2™ Design 
- 15 minute flush cycle every 12 hours
- Removes sediment
- Cleaner ice
- Longer life and easy maintenance
- Removable air filters (Air-cooled model only)
- R-404A Refrigerant

\* The F-801MAH-C is ENERGY STAR qualified.

#### Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

**Three Year** - Parts & Labor on entire machine. (Serial numbers Vxxxxxj) and after.)

**Five Year** - Parts on Compressor; air-cooled condenser coil.



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com



# Hoshizaki

## F-80IM\_H-C CUBELET ICE MACHINE SLIM-LINE SERIES

**DIMENSIONS**  
W x D x H  
**F-80IM\_H-C**  
22 x 27<sup>3/8</sup> x 25<sup>15/16</sup>

- Air-cooled
- Water-cooled

### AIR-COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F. 70°	728	698	670
Air Temp ° F. 80°	644	618	593
Air Temp ° F. 90°	569	<b>559</b>	524

### WATER-COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F. 70°	630	628	612
Air Temp ° F. 80°	597	583	568
Air Temp ° F. 90°	555	<b>556</b>	528

### UTILITY CONSUMPTION

Model Number	Approx. Elec. Watts		KWH per 100 LBS.		Potable Water Gal. per 100 lbs.	Cond. Water Gal. per 100 lbs.	
	90/70	70/50	90/70	70/50		90/70	70/50
F-801MAH-C	1038	976	4.51	3.22	12.0	N/A	N/A
F-801MWH-C	994	1003	4.29	3.83	12.0	83	39

### SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
F-801MAH-C	Air-Cooled	11.4	20	205 lbs.
F-801MWH-C	Water-Cooled	10.5	20	205 lbs.


### STORAGE BINS

Model Number	AHRI-Rated Storage Capacity*
B-300	260 lbs.
B-500	360 lbs.
B-700	550 lbs.
B-800	600 lbs.
B-900	660 lbs.
B-1150	900 lbs.
B-1300	950 lbs.
B-1500	1120 lbs.
B-1650	1210 lbs.


\*Rated in accordance with AHRI Standard 820 (I-P)

### ELECTRICAL & PLUMBING/F-80IM\_H-C


- 115-120V/60/1
- 20 amp Max Fuse/HACR Breaker Size
- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent
- Water-Cooled Model (Lines Must be Independent of Icemaker)
- Condenser Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Condenser Drain/Return Line: Minimum 1/4" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent




FRONT VIEW




SIDE VIEW



ICE DROP ZONE

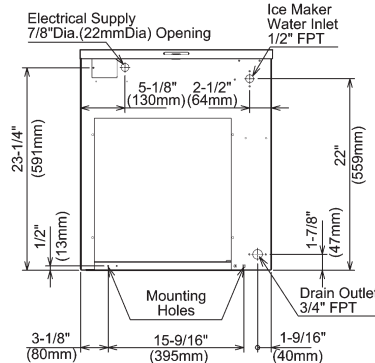

AIR-COOLED UNIT

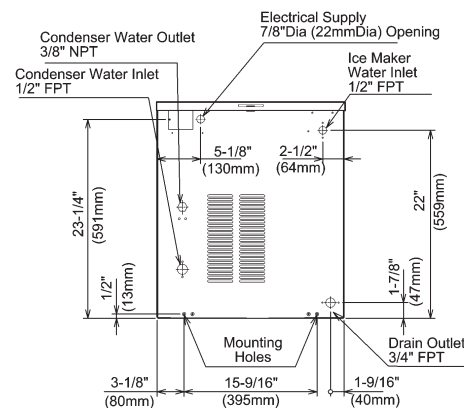

WATER-COOLED UNIT

### OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

### SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter (Air-Cooled model only)

