



FH1-2-SSB(-HD)

Professional Series Reach-In Freezers



FH1-2-SSB(-HD)
04/05/16
Item # 13139

W x D x H
1-section 27.5" x 33.6" x 82.5"*
2-section 55" x 33.6" x 85.5"*
*4" casters

FH1-SSB(-HD)



FH1-SSB(-HD) Shown

FH2-SSB(-HD)



FH2-SSB(-HD) Shown



Dimensions / Capacity

	One Section FH1-SSB(-HD)	Two Section FH2-SSB(-HD)
Interior Storage Capacity (CF)	22.3 ft ³	48.3 ft ³
Overall Width x Depth	27.5" x 33.6"	55" x 33.6"
Height (including 4" casters)	82.5"	82.5"
Door Opening Width x Height	21.75" x 59.25"	21.75" x 59.25"
Door Opening Width x Height (HD)	21.75" x 26.75" (HD)	21.75" x 26.75" (HD)
Depth with Door Open at 90°	58.5"	58.5"
Adjustable Shelves	3	6 Total; 3(Center Shelves)
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"
Crated Shipping Weight	400 lbs / 408 (HD)	618 lbs / 637 (HD)
Crated Height x Width x Depth	85" x 32" x 38"	85" x 59" x 38"

Electrical / Refrigeration

	One Section FH1-SSB(-HD)	Two Section FH2-SSB(-HD)
Voltage	115/60/1	115/60/1
HACR Breaker	15.0 Amps	20.0 Amps
Electrical Connection (NEMA)	5-15P Ⓢ	5-20P Ⓢ
Voltage Range	104-126	104-126
Ambient Temp. Range	45° to 100°F	45° to 100°F
Control Setpoint Range	-10° to +25°F	-10° to +25°F
Amperage	11.0	12
Energy Consumption (kWh/day) @NSF	9.03 / 9.7(HD)	13.6 / 17.4(HD)
Heat Rejection (BTU/Hr.) @NSF	1940	2647
Approx. Nominal Compres. BTU/HR (HP)	3000 (5/8HP)	3219 (1 1/4HP)
Refrigerant / Charge Amount (oz)	R-404A / (11 oz)	R-404A / (11 oz)

Options

- Door reversal kit
- Additional epoxy shelves
- Patented foot pedal door opener
- 6" legs with stainless steel bullet feet
- Tray/Pan slides
- Stainless steel shelves
- Door padlock hasp

Warranty

- * 3 Year - parts and Labor on entire machine.
 - 5 Year - Parts on Compressor
- Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Item #: _____
 Project: _____
 Qty: _____
 AIA#: _____

Features

- ▶ **Stainless steel interior with stainless steel exterior front and sides**
- ▶ **Refrigerant flow is controlled with thermostatic expansion valve**
- ▶ **Unique "ducted" air distribution system**

- EverCheck digital control system with audio and visual alarms

- Cabinet is insulated with 2-3/8" of CFC free, foamed in place polyurethane

- Self closing all stainless steel doors with locks

- Dual door frame heaters with energy saving on/off switch

- All metal torsion spring hinge design with stay open feature

- Exclusive "stepped" door design to protect recessed door gasket

- Flush mount door handles

- Field reversible doors (with optional kit)

- Evaporator coils are epoxy electrocoated (E-Coat) to help fight corrosion

- Hinged upper front panel for easy access to controller

- Removable, cleanable refrigeration system air filter

- Energy efficient automatic hot gas condensate evaporator

- (3) epoxy coated wire shelves per section are standard

- Standard with 4" casters (two with brakes)

- Stackable (two units high) to conserve warehouse floor space

- Three years parts and labor warranty

- Five year compressor warranty

- 8 ft. cord and plug




FH1-2-SSB(-HD)

Professional Series Reach-In Freezers




FH1-2-SSB(-HD)
04/05/16
Item # 13139


FRONT VIEW

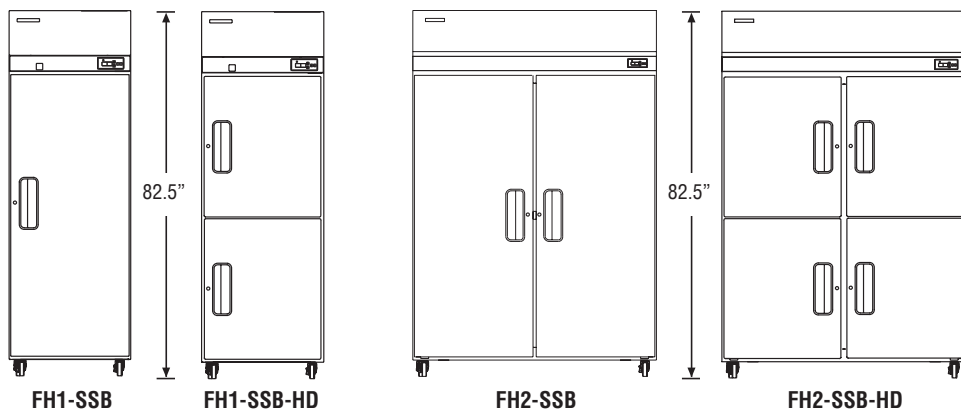

SIDE VIEW

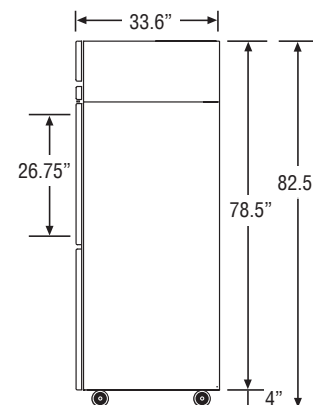

PLAN VIEW

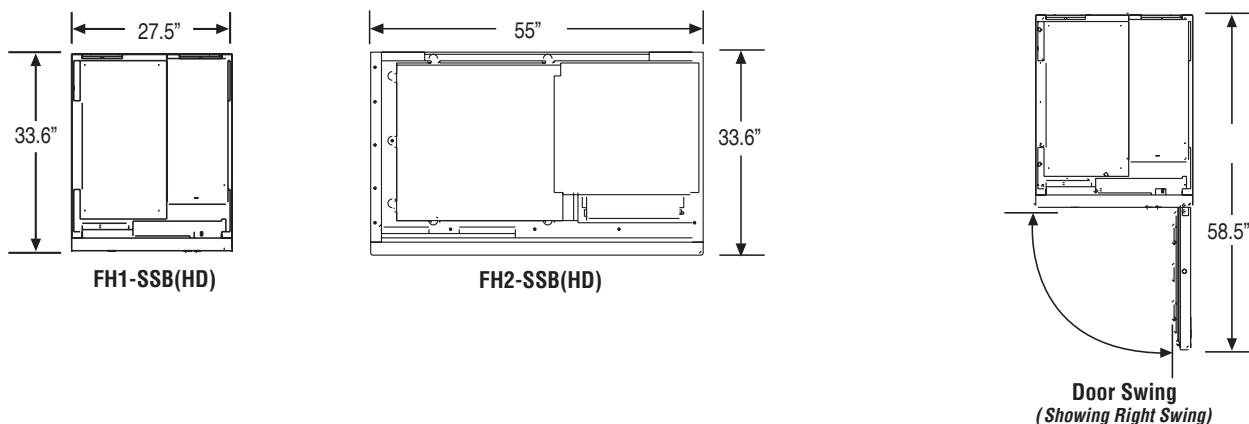

Cabinet Construction

The exterior cabinet front, sides, shrouds and hinged front panel are constructed of high quality stainless steel. The exterior top, back and bottom are made from galvanized steel. The cabinet interior walls and ceiling are stainless steel. The floor is stainless steel with coved corner construction. The “ducted” air flow system is also constructed of heavy gauge stainless steel. Heavy duty ABS thermal breaks are used to reduce heat transfer. Three (3) heavy duty epoxy coated shelves per section are standard (and include center shelves on two and three section models). Mounted on stainless steel pilasters the shelves are adjustable in 1” increments. The cabinet door perimeter heater provides condensation control in high humidity environments and is equipped with a back-up heater should the primary fail. A manual power switch allows for energy savings in low humidity conditions. Cabinet walls and doors are insulated with 2 3/8” of environmentally friendly R-134A, CFC free foamed in place polyurethane. The interior light is automatically activated when doors are opened.

Door Construction

Doors are constructed of high grade stainless steel inside and out and are standard with locks. Hoshizaki’s exclusive “stepped” design protects the recessed door gasket as product is removed from the cabinet. Flush mount door handles maximize aisle space by eliminating protruding parts. The door hinges are all metal and include an adjustable torsion spring closure that will not wear out like traditional cam-lift hinges. Hinge plates are constructed of eight (8) gauge stainless steel and include a welded hinge pin. Doors stay open at 105° and are self-closing at 75°. Snap-in magnetic door gaskets are durable and easily removed for cleaning. Door hinging is field reversible (with an optional door reversal hinge kit).

Refrigeration System

The high efficiency self contained refrigeration system is designed using a large capacity condenser and evaporator resulting in lower overall energy costs. The refrigeration system components are mounted on a fully insulated (ABS) housing that is removable from the main unit. All heat exchange takes place above and outside the food zone and allows for 100% utilization of the interior storage area. The ducted air distribution system achieves a uniform cabinet temperature eliminating “hot spots”, even when fully loaded with product. The evaporator coil is epoxy coated for extended life. Stainless steel refrigerant tubing is used as the hot gas condensate evaporator. A thermostatic expansion valve controls the flow of R-404A refrigerant. A removable, cleanable air filter protects the condenser coil and helps reduce cleaning requirements of the refrigeration system. 115 volt units are equipped with an eight foot cord and plug (20.0 amps or less).

The EverCheck™ Digital Control System monitors the operation and performance of the refrigeration system and is standard on all Professional Series units. The EverCheck™ includes solid state controls to maintain optimum cabinet temperature, and monitor high and low temperatures, high pressure, high and low voltage, clean filter, door open and evaporator temperature functions. It also provides audio and visual alarms to alert the operator to possible problems. An LED display shows the cabinet temperature and is adjustable to Fahrenheit or Celsius. The Professional Series freezer defrost is time initiated temperature terminated. Defrost frequency is adjustable between one (1) and twelve (12) defrosts per 24 hours [factory default is six (6)]. The EverCheck™ control system is NAFEM Data Protocol ready and requires optional hardware for implementation (monitoring software by other vendors).

Printed in the U.S.A.