

HUR40/68/96A

UNDERCOUNTER REFRIGERATORS

TEMPGUARD® Self-Contained Undercounter Refrigerators with EverCheck® Controls

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

HUR40/68/96A

8/06

Item # 13155

HUR40A DIMENSIONS

W x D x H

40.25 x 32.3 x 33.9*

*with 4" casters

HUR68A DIMENSIONS

W x D x H

68 x 32.3 x 33.9*

*with 4" casters

HUR96A DIMENSIONS

W x D x H

95.8 x 32.3 x 33.9*

*with 4" casters



HUR40A

Shown



HUR68A

Shown



HUR96A

Shown

- Stainless steel interior and exterior top, front, sides and bottom with galvanized steel back for long life, durability and easy maintenance
- (2) heavy duty epoxy shelves per section are standard, mounted on stainless steel pilasters, shelves are adjustable in 1" increments
- Cabinet door perimeter heater provides condensation control in high humidity environments and is equipped with a back-up heater should the primary heater fail
- Cabinet and doors are insulated with 2³/₈" CFC free, foamed-in-place polyurethane
- 4" heavy duty casters (2 with brakes) are standard
- Doors are constructed of high-grade 300 series stainless steel inside and out
- Doors are self-closing with a stay open feature at 105°
- Stepped door design protects door gasket when product is removed from the cabinet; Snap in magnetic door gaskets are durable and easily removed
- Door hinging is reversible at the factory
- High-efficiency refrigeration system is designed with a large capacity condenser and evaporator resulting in lower overall power consumption
- TempGuard's® EverCheck® controls monitor high and low temperatures, high pressure, clean filter and cabinet temperature functions and provide visual alarms to alert operator to possible problems
- Cartridge-style refrigeration system is easily removable from the main unit for ease of service
- Refrigeration system is equipped with solid state digital controls (Fahrenheit or Celsius display)
- Refrigeration system is designed to maintain proper temperatures with "zero" clearance on ends and at rear
- Defrost cycles are time initiated - temperature terminated
- Removable, cleanable air filter protects condenser and reduces cleaning requirements
- Hot gas condensate evaporator is standard
- Units equipped with 8' - 6" cord and plug
- Refrigerant: R-134A with capillary tube controls

* The HUR40A, HUR68A and HUR96A undercounter refrigerators are ENERGY STAR certified.



Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Two Year - Parts & Labor on entire machine.

Five Year - Parts on: Compressor.



HOSHIZAKI

HUR40/68/96A UNDERCOUNTER REFRIGERATORS

DIMENSIONS
W x D x H

HUR40A
40.25 x 32.3 x 33.9"

HUR68A
68 x 32.3 x 33.9"

HUR96A
95.8 x 32.3 x 33.9"
*with 4" casters

UNDERCOUNTER REFRIGERATORS

- 1 section undercounter refrigerator
- 2 section undercounter refrigerator
- 3 section undercounter refrigerator

DIMENSIONS/CAPACITY

Model #	HUR40A	HUR68A	HUR96A
Interior Storage Capacity (CF)	8.5 ft ³	18.8 ft ³	29.1 ft ³
Overall Width	40.25"	68"	95.8"
Overall Depth	32.3"	32.3"	32.3"
Height (including 4" casters)	33.9"	33.9"	33.9"
Depth with Door open at 90°	56.8"	56.8"	56.8"
Door Opening Width	22.5"	22.5"	22.5"
Door Opening Height	24.3"	24.3"	24.3"
Adjustable Shelves	2	4	6
Shelf Dimensions (W x D)	22.4" x 24.6"	25.0" x 24.6"	25.9" x 24.6"
Crated Shipping Weight	312 lb	435 lb	558 lb
Crated Height	35.5"	35.5"	35.5"
Crated Width	44.25"	72"	98.8"
Crated Depth	35.5"	35.5"	35.5"

ELECTRICAL & REFRIGERATION DATA

Model #	HUR40A	HUR68A	HUR96A
Voltage	115/60/1	115/60/1	115/60/1
Amperage	5.0	5.0	6.0
HACR Breaker	15.0	15.0	15.0
Electrical Connection (NEMA)	5 - 15P	5 - 15P	5 - 15P
*Energy Consumption (kwh/day)	3.2	4.5	5.2
* Heat Rejection (BTU/Hr.)	449	638	740
Approximate Nominal Compressor BTU/Hr.(HP)	1442 (1/5HP)	1442 (1/5HP)	2010 (1/4HP)
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F
Control Setpoint Range	21° to 53°	21° to 53°	21° to 53°
*Refrigerant	R-134A	R-134A	R-134A



* Based on 100°F ambient cycling at setpoint

OPTIONS


- 6" Legs
- 6" Casters
- Foot pedal
- Stainless steel back
- Tray pan rack slides (accommodates 18" x 26" pans)
- Bullnose top (front & rear)
- Drawers
- Reversible hinges
- Additional epoxy shelves




© HOSHIZAKI AMERICA, INC.

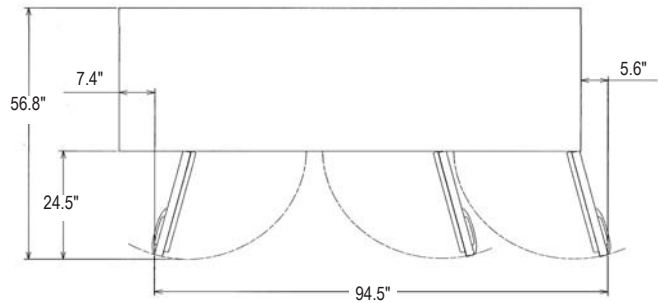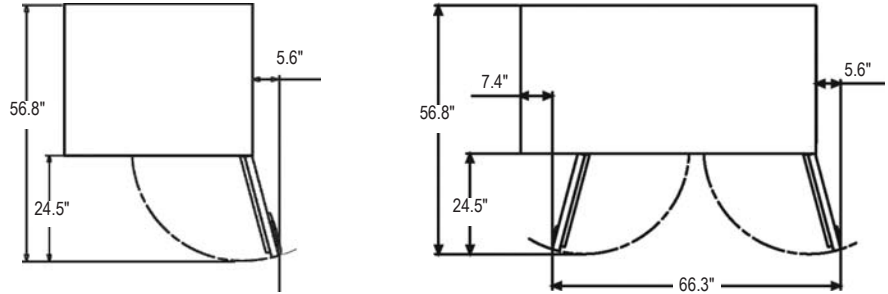


DOOR SWING




SIDE VIEW (BOTH UNITS)

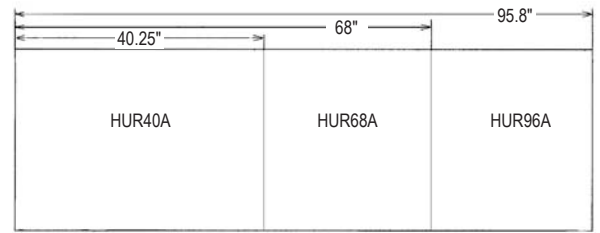



PLAN VIEW



HUR40A



HUR68A

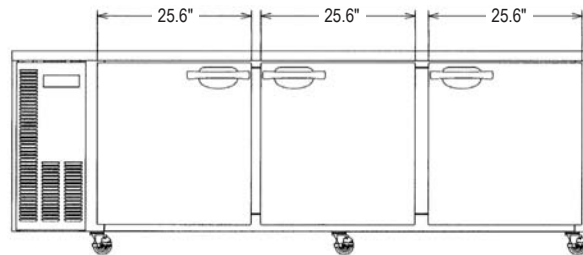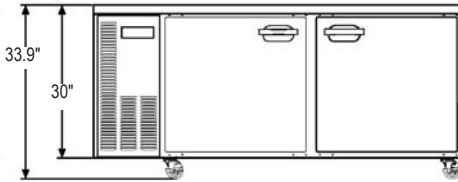

HUR96A

