

HWR40/68/96A

WORKTOP REFRIGERATORS

TEMPGUARD® Self-Contained Worktop Refrigerators with EverCheck® Controls

HWR40/68/96A

8/06

Item # 13168

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

HWR40A DIMENSIONS

W x D x H

40.25 x 32.3 x 39.9*
*with 6" casters

HWR68A DIMENSIONS

W x D x H

68 x 32.3 x 39.9*
*with 6" casters

HWR96A DIMENSIONS

W x D x H

95.8 x 32.3 x 39.9*
*with 6" casters



HWR40A

Shown



HWR68A

Shown



HWR96A

Shown

- Stainless steel interior and exterior top, front, sides and bottom with galvanized steel back for long life, durability and easy maintenance. The stainless steel top includes a 4" backsplash
 - (2) heavy duty epoxy shelves per section are standard, mounted on stainless steel pilasters, shelves are adjustable in 1" increments
 - Cabinet door perimeter heater provides condensation control in high humidity environments and is equipped with a back-up heater should the primary heater fail
 - Cabinet and doors are insulated with 2³/₈" CFC free, foamed-in-place polyurethane
 - 6" heavy duty casters (2 with brakes) are standard
 - Doors are constructed of high-grade 300 series stainless steel inside and out
 - Doors are self-closing with a stay open feature at 105°
 - Stepped door design protects door gasket when product is removed from the cabinet; Snap in magnetic door gaskets are durable and easily removed
 - Door hinging is reversible at the factory
 - High-efficiency refrigeration system is designed with a large capacity condenser and evaporator resulting in lower overall power consumption; Evaporator coil is coated for extended life
 - TempGuard's® EverCheck® controls monitor high and low temperatures, high pressure, clean filter and cabinet temperature functions and provide visual alarms to alert operator to possible problems
 - Cartridge-style refrigeration system is easily removable from the main unit for ease of service
 - Refrigeration system is equipped with solid state digital controls (Fahrenheit or Celsius display)
 - Refrigeration system is designed to maintain proper temperatures with "zero" clearance on ends and at rear
 - Defrost cycles are time initiated - temperature terminated
 - Removable, cleanable air filter protects condenser and reduces cleaning requirements
 - Hot gas condensate evaporator is standard
 - Units equipped with 8' - 6" cord and plug
 - Refrigerant: R-134A with capillary tube controls
- * The HWR40A, HWR68A and HWR96A worktop refrigerators are ENERGY STAR certified.



Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Two Year - Parts & Labor on entire machine.

Five Year - Parts on: Compressor.



Hoshizaki

HWR40/68/96A WORKTOP REFRIGERATORS

DIMENSIONS
W x D x H

HWR40A
40.25 x 32.3 x 39.9"

HWR68A
68 x 32.3 x 39.9"



HWR96A
95.8 x 32.3 x 39.9"
*with 6" casters

WORKTOP REFRIGERATORS

- 1 section worktop refrigerator
- 2 section worktop refrigerator
- 3 section worktop refrigerator

DIMENSIONS/CAPACITY


Model #	HWR40A	HWR68A	HWR96A
Interior Storage Capacity (CF)	8.5 ft ³	18.8 ft ³	29.1 ft ³
Overall Width	40.25"	68"	95.8"
Overall Depth	32.3"	32.3"	32.3"
Height (including 6" casters)	35.9"	35.9"	35.9"
Depth with Door open at 90°	56.8"	56.8"	56.8"
Door Opening Width	22.5"	22.5"	22.5"
Door Opening Height	24.3"	24.3"	24.3"
Adjustable Shelves	2	4	6
Shelf Dimensions (W x D)	22.4" x 24.6"	25" x 24.6"	25.9" x 24.6"
Crated Shipping Weight	317 lb	443 lb	561 lb
Crated Height	40.5"	40.5"	40.5"
Crated Width	44.25"	72"	99.8"
Crated Depth	35.5"	35.5"	35.5"

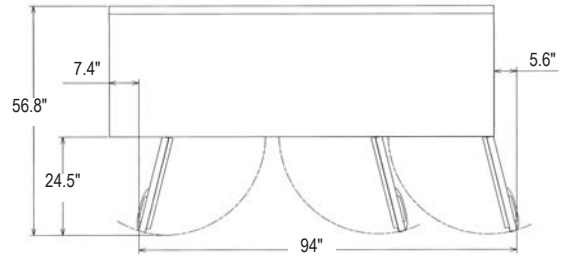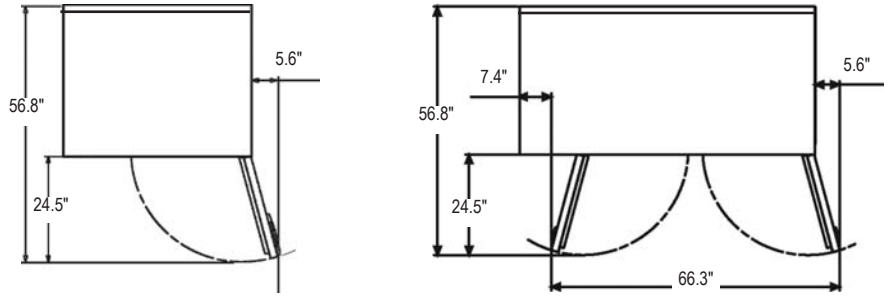


DOOR SWING

ELECTRICAL & REFRIGERATION DATA


Model #	HWR40A	HWR68A	HWR96A
Voltage	115/60/1	115/60/1	115/60/1
Amperage	5.0	5.0	6.0
HACR Breaker	15.0	15.0	15.0
Electrical Connection (NEMA)	5 - 15P	5 - 15P	5 - 15P
*Energy Consumption (kwh/day)	3.2	4.5	5.2
* Heat Rejection (BTU/Hr.)	449	638	740
Approximate Nominal Compressor BTU/Hr.(HP)	1442 (1/5HP)	1442 (1/5HP)	2010 (1/4HP)
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F
Control Setpoint Range	21° to 53°F	21° to 53°F	21° to 53°F
*Refrigerant	R-134A	R-134A	R-134A




SIDE VIEW (ALL UNITS)

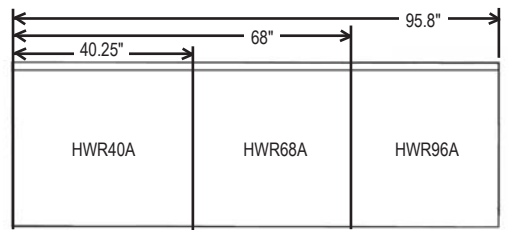


PLAN VIEW (ALL UNITS)



HWR40A



HWR68A

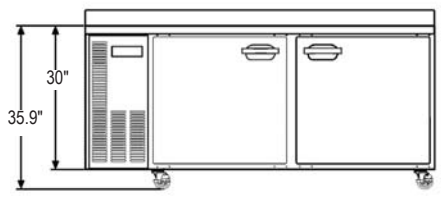

HWR96A

* Based on 100°F ambient cycling at setpoint

OPTIONS

- 6" Legs
- Additional epoxy shelves
- Drawers (two high, two 6" deep 12" x 20" pans/drawer)
- Stainless steel back
- Bull nose top (front & rear)
- Tray pan rack slides (accommodates 18" x 26" pans)
- Reversible hinging (factory modification)



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

