

KM-1900S_H-P

STACKABLE ICE CUBER

TAMPER PROOF MODEL

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

KM-1900S_H-P

2/3/15

Item #I3323

CUBER DIMENSIONS

W x D x H

KM-1900S_H-P
48 x 27^{3/8} x 36^{7/16}



Exterior Fasteners are Tamper Proof Torx Pin Screws

KM-1900SAH-P

Air-Cooled I Phase


KM-1900SWH-P

Water-Cooled I Phase






Shown on standard bin for placement only.

KM CUBE DIMENSIONS



**approximate size in inches, image not to scale

- Up to 1919 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- Protected by H-GUARD Plus Antimicrobial Agent 
- CycleSaver™ design 
- EverCheck™ alert system 
- Individual crescent cube
- Stainless steel evaporator
- Stackable for 3752 lbs. per 24 hour ice production in the same floor space
- Removable air filters located under front panel (Air-cooled model only)
- R-404A Refrigerant
- * The KM-1900SAH-P is ENERGY STAR qualified.

Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Three Year - Parts & Labor on entire machine.

Five Year - Parts & Labor on: Evaporator.

Five Year - Parts on: Compressor, air-cooled condenser coil.



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com



Hoshizaki

KM-1900S_H-P STACKABLE ICE CUBER

DIMENSIONS
W x D x H
KM-1900S_H-P
48 x 27^{3/8} x 36^{7/16}

STACKABLE ICE CUBER

- Air-cooled | phase
- Water-cooled | phase

AIR - COOLED

Water Temp° F.	50°	70°	90°
Air Temp° F. 70°	1867	1777	1638
80°	1798	1659	1511
90°	1777	1560	1413

WATER - COOLED

Water Temp° F.	50°	70°	90°
Air Temp° F. 70°	1919	1892	1762
80°	1898	1856	1674
90°	1892	1826	1663


UTILITY CONSUMPTION

Model Number	Ice Production Per Cycle		KWH per 100 LBS.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	Lbs.	Cubes			
KM-1900SAH-P	45.3	2160	4.1	18.8	N/A
KM-1900SWH-P	47.5	2160	3.2	16.1	98

SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KM-1900SAH-P	Air-Cooled	14.4	30	415 lbs.
KM-1900SWH-P	Water-Cooled	12.5	30	415 lbs.


KM CUBE DIMENSIONS




**approximate size in inches, image not to scale

ELECTRICAL & PLUMBING/KM-1900S_H-P


- 208 - 230V/60/1Ø (3 wire with neutral for 115V)
- 30 amp Max Fuse/HACR Breaker Size
- Icemaker Water Supply Line: Minimum 3/8" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent
- Water-Cooled Model (Lines Must be Independent of Icemaker)
- Condenser Water Supply Line: Minimum 3/8" Nominal ID Copper Water Tubing or Equivalent
- Condenser Drain/Return Line: Minimum 3/8" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent




FRONT VIEW

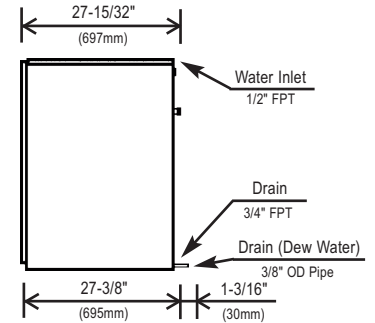


SIDE VIEW



ICE DROP ZONE

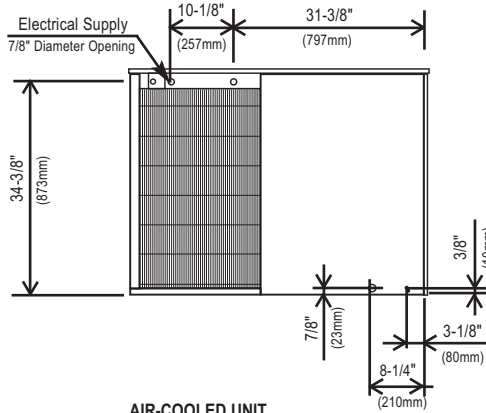

AIR-COOLED UNIT

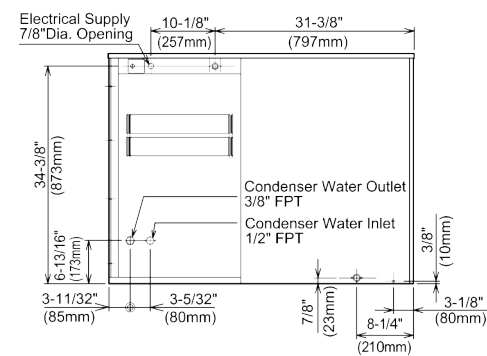

WATER-COOLED UNIT

OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 187 - 253V

SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters under front panel (Air-cooled model only)
- Exterior fasteners are tamper proof torx pin screws.



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

