

KMS-1401MLH

SERENITY SERIES

CUBER ICE MACHINE

Item # _____

Project: _____

Qty: _____

KMS-1401MLH

12/09

Item # 13254

CUBER DIMENSIONS
W x D x H

KMS-1401MLH
30 x 24 x 28

CONDENSING UNIT DIMENSIONS
W x D x H




Installation Dimension*
SRK-14H / SRK-14H3
52^{3/8} x 19^{1/2} x 43
*Dimensions include legs

Actual Dimension
SRK-14H / SRK-14H3
50 x 17 x 28



KMS-1401MLH

Remote Air-Cooled
Shown on an optional
Lancer 30" Dispenser

- Approximately 1311 lbs. of ice production per 24 hours
- Less heat in the kitchen
- Minimized noise
- Durable stainless steel exterior
- Individual crescent cube ice
- Protected by *HoshiGuard* Antimicrobial Agent 
- CycleSaver® Design 
- EverCheck® alert system 
- Stainless steel evaporator
- Removable water tank - cleaning access to dispenser
- CFC / HFC Free foam
- R-404A Refrigerant
- Complies with California Energy Commission guidelines (CEC)



Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Three Year - Parts & Labor on entire machine.

Five Year - Parts & Labor on: Evaporator.

Five Year - Parts on: Compressor, air-cooled condenser coil.



KMS-140IMLH CUBER ICE MACHINE SERENITY SERIES

DIMENSIONS
W x D x H
KMS-140IMLH
30 x 24 x 28

Installation Dimension*
SRK-14H / SRK-14H3
52^{3/8} x 19^{1/2} x 43
*Dimensions include legs
Actual Dimension
SRK-14H / SRK-14H3
50 x 17 x 28

REMOTE AIR - COOLED 1 PHASE / (SRK-14H)

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	1311	1278	1194
80°	1286	1236	1129
90°	1278	1200	1101

REMOTE AIR - COOLED 3 PHASE / (SRK-14H3)

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	1305	1265	1178
80°	1275	1213	1107
90°	1265	1170	1069

UTILITY CONSUMPTION

Model Number	Ice Production Per Cycle		KWH per 100 LBS. 90/70	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	Lbs.	Cubes			
KMS-1401MLH with SRK-14H	26	1248	5.25	24.5	N/A
KMS-1401MLH with SRK-14H3	25	1248	5.00	26.5	N/A

SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KMS-1401MLH with SRK-14H	Remote Air-Cooled	15.3	20	177 lbs.
				273 lbs.
KMS-1401MLH with SRK-14H3	Remote Air-Cooled	13.8	20	177 lbs.
				273 lbs.

ELECTRICAL & PLUMBING / KMS-140IMLH

- 115V/60/1 - Voltage supply for the KMS Ice Maker is supplied from the SRK Remote Condenser
- 1/2" FPT copper or equivalent independent potable water supply
- 3/4" FPT independent drain connection

CONDENSER UNIT / SRK-14H

- 208-230/60/1 (3 wire with neutral for 115V)
- 20 amp Max Fuse/HACR Breaker Size


CONDENSER UNIT / SRK-14H3

- 208-230/60/3 (3 wire with neutral for 115V)
- 20 amp Max Fuse/HACR Breaker Size





HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

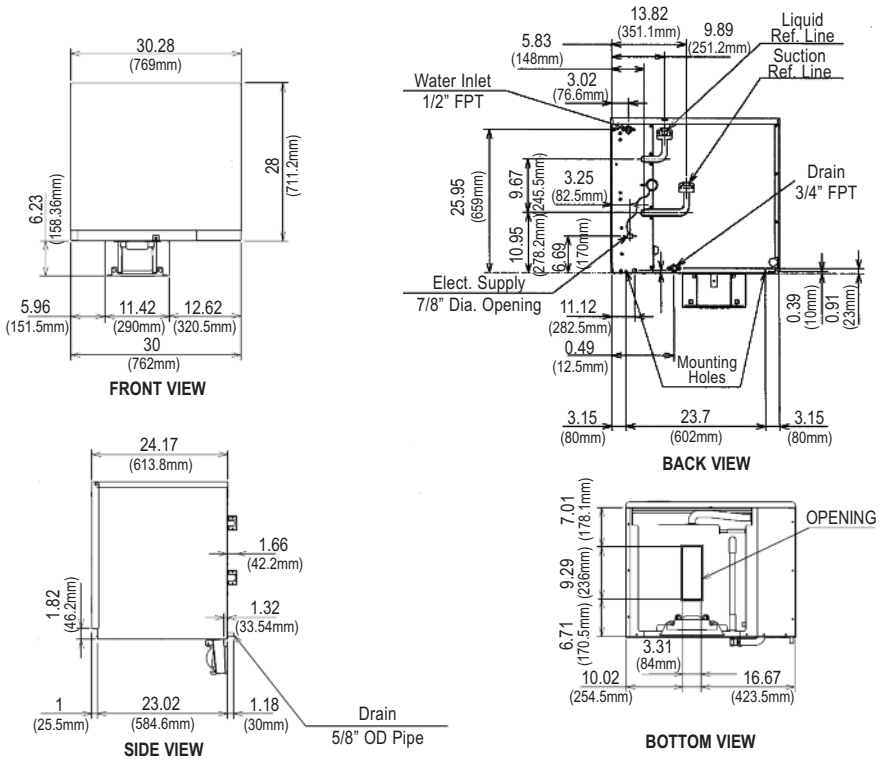

SRK-14H / SRK-14H3 Remote Condensing Unit (Sold Separately)
For Use with KMS-140IMLH

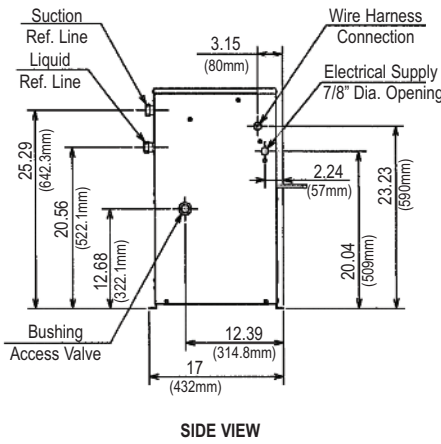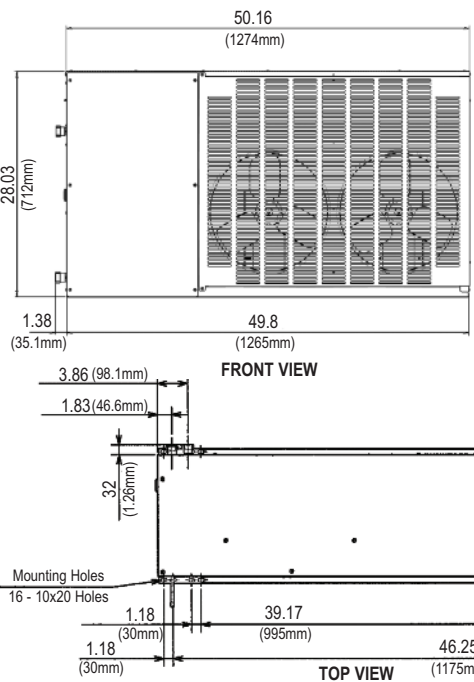

Pre-Charged Tubing Kits
(Sold Separately)
• 20' R404-20810
• 35' R404-35810
• 55' R404-55810

Voltage supply for the KMS Ice Maker is supplied from the SRK Remote Condenser.

OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

SERVICE

- Panels easily removed and all components accessible for service.

CONDENSING UNIT

- Voltage Range 187 - 253V
- Ambient Temp Range -20 - 122° F

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

