



G24 Series Heavy Duty Gas Griddles

Item: _____
 Quantity: _____
 Project: _____
 Approval: _____
 Date: _____

Models:

- | | | | | |
|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| <input type="checkbox"/> G24-24G | <input type="checkbox"/> G24-36G | <input type="checkbox"/> G24-48G | <input type="checkbox"/> G24-60G | <input type="checkbox"/> G24-72G |
| <input type="checkbox"/> G24-24GTHX | <input type="checkbox"/> G24-36GTHX | <input type="checkbox"/> G24-48GTHX | <input type="checkbox"/> G24-60GTHX | <input type="checkbox"/> G24-72GTHX |



*Model G24-24GTHX
(shown mounted on
CS24-24 stand/w casters)*

Standard Features:

- Stainless steel front - the balance, black power coat epoxy
 - Full spatula width front grease trough
 - Large grease bucket holds 1-3/4 gallons (7.9 liters)
 - 3/4" (19mm) polished steel griddle plate with 2-5/8" (67mm) welded splash guards on both sides and rear
 - 4" (102mm) stainless steel legs
 - 24" (610mm) deep grilling surface
 - Available with snap action thermostats or hi-lo valves
 - Chrome plated thermostat guards
- 33,333 BTU (valve controlled) or 30,000 BTU (thermostat controlled) for every 12" (305mm) of griddle width
 - 100° to 450° F (40°-230°C) temperature range
 - 5 griddle widths available - 24" (610mm) through 72" (1829mm)

Optional Features:

- Stainless steel sides
- Stainless steel back
- Grooved griddle plate (in 12" sections)
- For models that are "CE" approved with valve controlled flame failure features add the suffix "GSFD" at the end of the model number

Note: Stands are available see form # CS24/CSD

Specifications:

Heavy duty gas griddles available in five (5) widths; 24", 36", 48", 60", and 72". High performance, high volume production with even, consistent, controlled temperatures 100° to 450° F (40°-230°C) range. 3/4" (19mm) thick griddle plate, with 24" (610 mm) deep grilling surface.

Griddles are available with hi-lo valve controls or for temperature set control models with snap action thermostats. Snap action thermostat griddles do not require any electrical connections. Valve or thermostat models have a control and burner for every 12" (305mm) width of griddle for maximum heat input on the plate surface.



G24 Series Heavy Duty Gas Griddles

Garland Commercial Industries, LLC
 185 East South Street
 Freeland, PA 18224
 Phone: (570) 636-1000
 Fax: (570) 636-3903

Garland Commercial Ranges Ltd
 1177 Kamato Road,
 Mississauga, Ontario
 L4W 1X4 CANADA
 Phone: 905-624-0260
 Fax: 905-624-5669



| Input Chart Natural Gas | | | | |
|-------------------------|-------------------------|---------------------------------|--------------------|----------------|
| Model | Description | Controls | BTU/HR | kW/HR |
| G24-24G G24-24GTHX | 24" (610mm) Griddle | 2 Hi-lo Valves 2 Thermostats | 66,500 60,000 | 19.48 17.58 |
| G24-36G G24-36GTHX | 36" (914mm) Griddle | 3 Hi-lo Valves 3 Thermostats | 100,000 90,000 | 29.31 26.38 |
| G24-48G G24-48GTHX | 48" (1219mm) Griddle | 4 Hi-lo Valves 4 Thermostats | 133,000 120,000 | 38.98 35.17 |
| G24-60G G24-60GTHX | 60" (1524mm) Griddle | 5 Hi-lo Valves 5 Thermostats | 166,500 150,000 | 48.78 43.96 |
| G24-72G G24-72GTHX | 72" (1829mm) Griddle | 6 Hi-lo Valves 6 Thermostats | 200,000 180,000 | 58.61 52.75 |

| Combustible Wall Clearances: In (mm) | | |
|--------------------------------------|--------|-----------------|
| Sides | Back | Base |
| 6(152) | 6(152) | Non-combustible |


NOTE: Installation clearance reductions are applicable only where local codes permit

Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

| Supply Operating Pressure | | Manifold Operating Pressure | |
|---------------------------|--------------------|-----------------------------|------------------|
| Natural Gas | Propane | Natural Gas | Propane |
| 7" WC (17.5 mbar) | 11" WC (27.5 mbar) | 4" WC (10 mbar) | 10" WC (24 mbar) |

Note: For use with Natural & L.P Gas only

Ratings shown are for natural gas installations up to 2000 feet (610m) above sea level. BTU input ratings must be de-rated for high altitude installations. Specify altitude of product if over 2000 feet (610m)

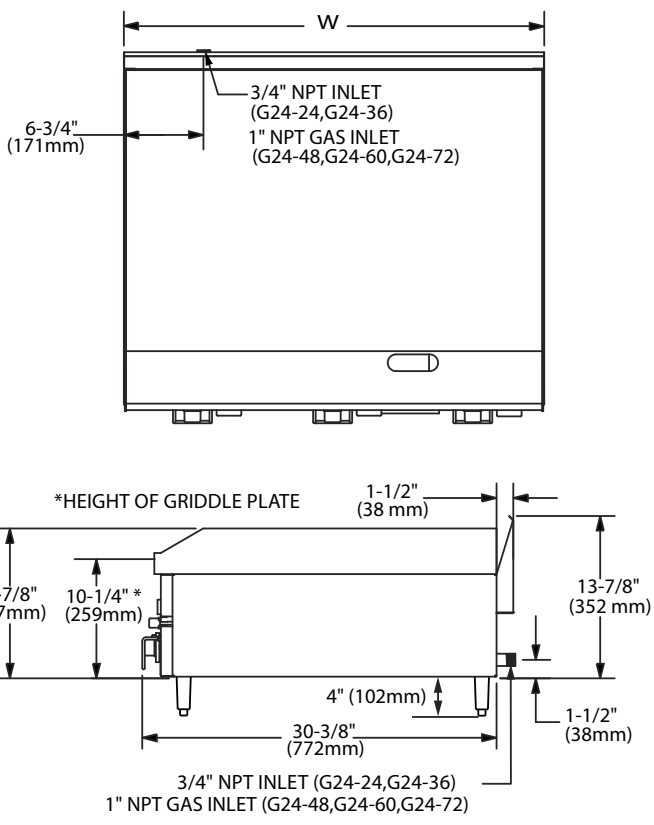

| Model | W |
|-----------------------|--------------|
| G24-24G G24-24GTHX | 24" (610mm) |
| G24-36G G24-36GTHX | 36" (914mm) |
| G24-48G G24-48GTHX | 48" (1219mm) |
| G24-60G G24-60GTHX | 60" (1524mm) |
| G24-72G G24-72GTHX | 72" (1829mm) |

Form# G24-G/GTHX Series (07/08/09)