



Item: \_\_\_\_\_  
Quantity: \_\_\_\_\_  
Project: \_\_\_\_\_  
Approval: \_\_\_\_\_  
Date: \_\_\_\_\_

# Heavy Duty Gas Hot Plates

Models:

☐ UTOG12-2      ☐ UTOG24-4      ☐ UTOG36-6      ☐ UTOG48-8



Model UTOG24-4

## Standard Features:

- SS front, sides and back
- 4" SS adjustable legs
- 3/4" NPT gas regulator with "T" gas manifold connection for straight through rear or flush-mount gas connections.
- 3 1/2" deep SS front rail
- SS large capacity crumb tray
- Split ergonomic grates which are easy to handle and clean
- Pilots are protected from spills
- 30,000 BTU (Natural Gas) Performer Pro 2-piece octagonal gas burners
- Burners are controlled with individual adjustable valve
- Models are available with 2, 4, 6, and 8 open-top burners

## Optional Features:

- ☐ Stainless steel skirt for dias/ counter surface mounting.
- ☐ Stainless stands with solid top shelf and holding shelf with legs.
- ☐ Set of four casters available for stands (locking casters on front)


US Range designed these heavy duty counter hot plates for high-volume production, while offering the flexibility to match up with a full counter lineup. Models available with 2, 4, 6 and 8 open top burner combinations. Available in nominal imperial widths 12" (300mm) to 48" (1200mm) with 13" (330mm) height, and 32" (814mm) depth. Split ergonomic cast iron grates protect pilots from spill-overs, and are easy to handle and clean. Each individually valve-controlled burner is rated at 30,000 BTU/h (8.78 kW) natural gas or 26,000 BTU/h (7.61 kW) propane gas. Stainless steel front, sides and back with large capacity stainless steel crumb tray.



Garland Commercial  
Industries, LLC  
185 East South Street  
Freeland, PA 18224  
Phone: (570) 636-1000  
Fax: (570) 636-3903



Garland Commercial Ranges Ltd  
1177 Kamato Road,  
Mississauga, Ontario  
L4W 1X4 CANADA  
Phone: 905-624-0260  
Fax: 905-624-5669



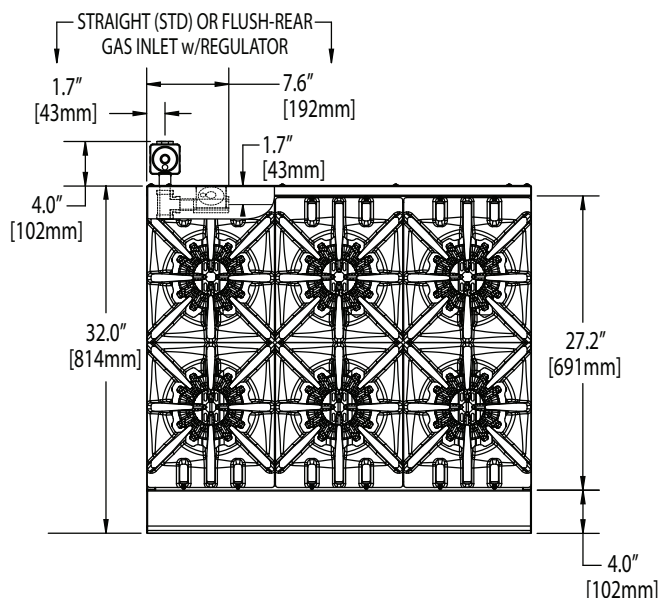

For use with Natural or Propane gas only. Gas input ratings shown for installations up to 2000 ft., (610m), above sea level. Please specify altitudes over 2000 ft. and gas type when ordering.

Garland/U.S. Range products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland/U.S. Range will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

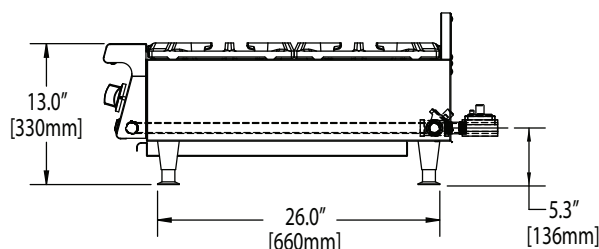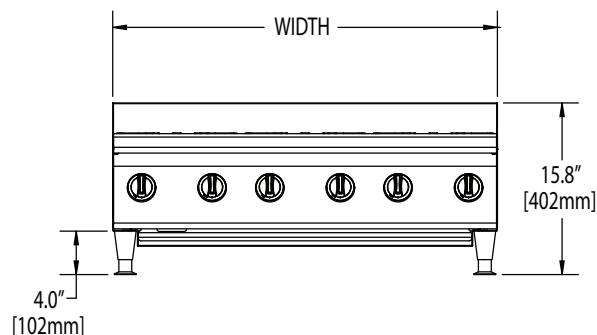

| Model #  | Width<br>In (mm) | Height<br>(w/std legs) | Depth<br>In (mm) | Total Input (BTU) |         | Shipping Information |       |
|----------|------------------|------------------------|------------------|-------------------|---------|----------------------|-------|
|          |                  |                        |                  | NAT               | PRO     | Lbs/Kg               | Cu Ft |
| UTOG12-2 | 11-13/16 (300)   | 13 (330)               | 32 (814)         | 60,000            | 52,000  | 73/33                | 4     |
| UTOG24-4 | 23-5/8 (600)     |                        |                  | 120,000           | 104,000 | 135/61               | 8     |
| UTOG36-6 | 35-7/16 (900)    |                        |                  | 180,000           | 156,000 | 191/87               | 25    |
| UTOG48-8 | 47-1/4 (1200)    |                        |                  | 240,000           | 208,000 | 247/112              | 33    |

| SUPPLY OPERATING PRESSURE |      |         |      | MANIFOLD OPERATING PRESSURE |      |         |      | CLEARANCES                  |            |
|---------------------------|------|---------|------|-----------------------------|------|---------|------|-----------------------------|------------|
| NATURAL GAS               |      | PROPANE |      | NATURAL GAS                 |      | PROPANE |      | INSTALLATION TO COMBUSTIBLE |            |
| "WC                       | MBar | "WC     | Mbar | "WC                         | MBar | "WC     | Mbar | Sides                       | Rear       |
| 7                         | 17.5 | 11      | 27.5 | 4.5                         | 11   | 10      | 24.5 | 14" (356mm)                 | 6" (152mm) |

Form# UTOG (06/04/10)