



## CYCLONE SERIES FULL-SIZE GAS CONVECTION OVENS

### SERIES: BCO-G



Bakers Pride® BCO-G series convection ovens feature single and double-stacked models with energy-efficient natural/LP gas operation. Independent doors are fully insulated and feature cool-touch handles. The two-speed fan has a 900 rpm low-speed setting for precise cooking. The models in this series are serviceable from the front and include stainless steel front, top, sides, and doors. The lighted oven chamber features porcelain enamel interiors over heavy gauge-steel, eleven-position removable rack guides with 1.62" spacing, and five chrome plated racks. Standard rotary controls are simple to use and include a cool-down function and continuous-ring timer.

#### FEATURES AT A GLANCE

- 60,000 BTUH per oven
- Natural or LP gas
- 120 V, 60 Hz controls
- Electronic temperature control
- 60/40 split independent doors with dual handles
- Stainless steel door seals
- Double-pane, thermal glass door windows
- Interior oven light
- 60-minute, continuous-ring timer
- 150–550°F (65–287°C) temperature range
- Two-speed, 1/4 hp fan motor with cool-down mode and low-speed setting (900 rpm)
- Porcelain enamel oven interior
- Eleven-position removable rack guides with 1.62" spacing
- Five heavy-duty, chrome-plated wire racks with stop
- Black-powder-coated legs with adjustable bullet feet
- Front-mounted, hinged control panel for easy service access
- Units are hardwired; plug and cord not included
- One-year limited warranty

#### OPTIONS & ACCESSORIES


- 30" (762 mm) stainless steel legs and shelf
- Stainless steel legs with casters and shelf
- Rack stand with rack guides
- Stainless steel perf back
- Direct vent flue
- Oven racks
- Stacking brackets
- Gas conversion kit
- Stacking kit with 6" legs
- Stacking kit with casters
- 25" (635 mm) legs with 3" (76 mm) adjustable feet
- 25" legs with casters



# CYCLONE SERIES FULL-SIZE GAS CONVECTION OVENS

## SERIES: BCO-G

### EQUIPMENT DIMENSIONS

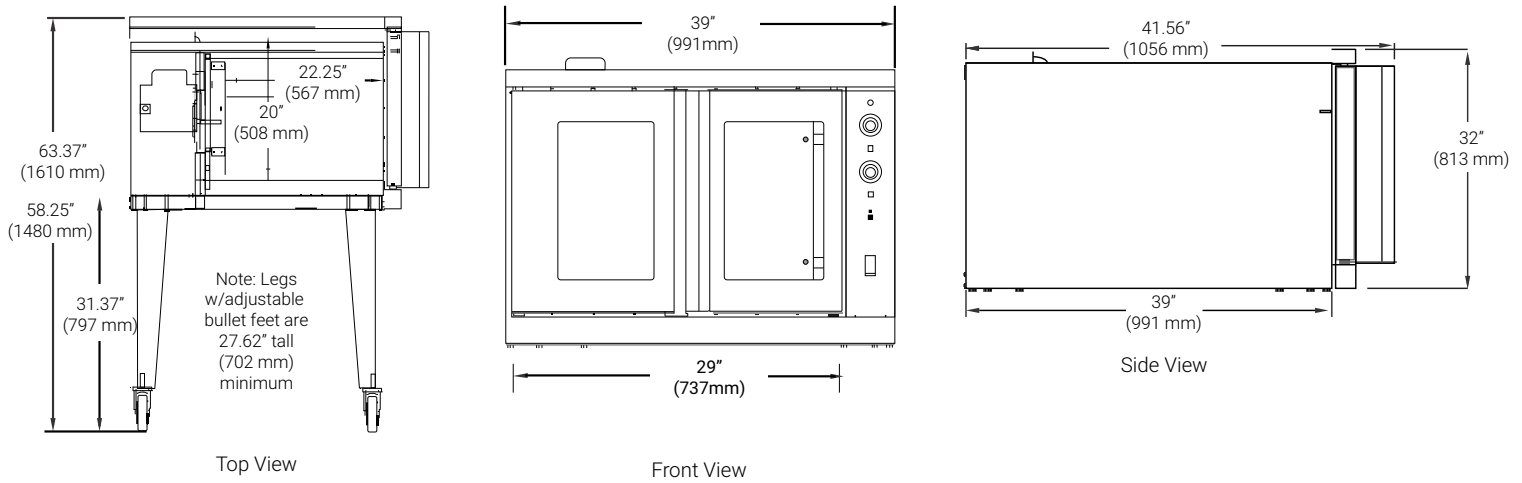

### MECHANICAL SPECIFICATIONS

Model #	Overall Dim (W x H x D)	Interior Dim (W x H x D)	Carton Dim (W x H x D)	Cubic Feet	Cubic Meter	Ship Wt.
BCO-G1	39" x 63.37" x 41.56" (991 x 1610 x 1056)	29" x 20" x 22.25" (737 x 508 x 567)	43" x 38.25" x 48.25" (1092 x 972 x 1226)	39.25	1.11	565 (256kg)
BCO-G2	39" x 72.25" x 41.56" (991 x 1835 x 1056)	29" x 20" x 22.25" (737 x 508 x 567)	Shipped in two boxes as above specifications			

\*Height includes legs

### POWER SUPPLY

Model #	BTUH	kW	HZ	Voltage	Phase	Wire	RMP-low	RMP-high	Amps
BCO-G1	60,000	17.58	60	120	1	2	900	1,725	3.5

### REQUIRED CLEARANCES

	Vent Hood	Direct Venting
Left	1" (25 mm)	3" (76 mm)
Right	1" (25 mm)	1" (25 mm)
Back	3" (76 mm)	3" (76 mm)

### GAS SUPPLY

Model #	Manifold Pressure		Inlet Pressure		Rear Connection
	WC	Mbar	WC	Mbar	
Natural gas	3.5	9 min	7"	17.5 min	1/2" NPT
Propane	1	25	N/A	N/A	

Separate gas connections or external manifold required for stacked ovens.

Bakers Pride Oven Company, LLC is a wholly owned subsidiary of Standex International Corporation.

Bakers Pride reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.



Freight Class: 110  
FOB: Allen, 75013

11.13.2017

