



HL3 Series


hotLOGIX HEATED HOLDING CABINETS

(insulated aluminum with mechanical controls)

CARTER-HOFFMANN



FOOD SERVICE EQUIPMENT
HOLDING CABINETS

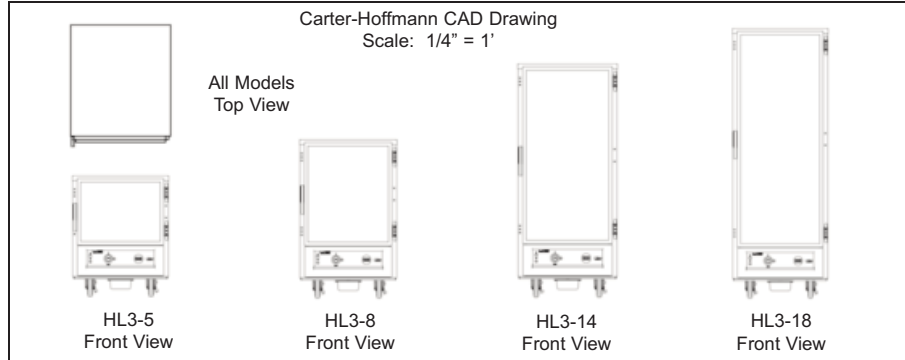

Model Number	Pan/Tray Capacity		Spacing		Inside Working Height		Overall Dimensions						Caster Diameter		Shipping Weight	
	12"x20"	18"x26"	in	mm	in	mm	Height		Depth		Width		in	mm	lbs	kg
HL3-5	10	5	3	76	15 ¹ / ₄	387	31 ⁵ / ₈	803	31 ¹ / ₂	800	26 ¹ / ₂	673	5	127	104	47
HL3-8	16	8	3	76	24 ¹ / ₄	616	40 ⁵ / ₈	1032	31 ¹ / ₂	800	26 ¹ / ₂	673	5	127	147	67
HL3-14	28	14	3	76	42 ¹ / ₄	1073	58 ⁵ / ₈	1489	31 ¹ / ₂	800	26 ¹ / ₂	673	5	127	170	77
HL3-18	36	18	3	76	54 ¹ / ₄	1378	70 ⁵ / ₈	1794	31 ¹ / ₂	800	26 ¹ / ₂	673	5	127	218	99

-
-
-
-

CONSTRUCTION...Welded & riveted double wall, insulated cabinet construction with cabinet welded to base.

CABINET MATERIAL...All aluminum interior and exterior double wall, insulated construction; .063 aluminum exterior with 2V finish.

BASE FRAME....125 natural aluminum

CASTERS...5" diameter casters with rubber tread. Four swivel casters. Two casters fitted with brakes.

DOOR...Single panel tempered glass door set in extruded black anodized aluminum frame. Field reversible. Full width aluminum drip trough with 1/2" drain located at base of door. Removable plastic catch pan mounted under base of cabinet. High temperature santoprene gasket mounted to door.

HINGES...Adjustable edge mount hinges with chrome plate finish.

LATCH...Heavy-duty edge mount latch with magnetic catch.

INSULATION... 1" thick high density continuous wrap-around insulation in sides and top.

TRAY RACK ASSEMBLIES... Universal wire slides at fixed spacing of 3". Assemblies removable. Hold 18"x26" sheet pans, 12"x20" steam table pans, 2/1 or 1/2 G/N pans.

THERMOMETER...Digital thermometer with remote sensing bulb and sensing bulb protector. Displays temperature in one degree increments.

CONTROLS...Single dial for heat setting.

HEATING SYSTEM...Bottom mounted heater with one 1700 watt coiled incoloy-sheathed heating element. High impedance protected fan motor. Blower fan circulates air. Full range thermostat and on/off switch with power indicating light. Dial control for heat settings.

ELECTRICAL CHARACTERISTICS... Operates on 120 volts, 60 cycle, single phase, 1750 watts, 15 amps. Eight foot rubber cord with 3 prong grounding plug. NEMA 5-20P. See low wattage options below.

PERFORMANCE...Capable of heating to 190°F (88°C). Preheat to 160°F (71°C) in approximately 30 minutes. Low wattage options will affect cabinet performance.

ACCESSORIES/OPTIONS...

- Solid aluminum door with black anodized finish on interior and exterior
- Adjustable universal tray slides for 12"x20" and 18"x26" pans; 3" spacing
- Fixed angle slides for 18"x26" pans at 1.5" spacing
- Low wattage: 120v, 12.5A, 1500w, NEMA 5-15P
- CSA low wattage: 120v, 12A, 1400w, NEMA5-15P
- Dutch doors (HL3-18 only)

SPECIFICATIONS

Specifications subject to change through product improvement & innovation.

Printed in U.S.A. E73 0816
Carter-Hoffmann is a trademark of Carter-Hoffmann LLC



HL3 Series hotLOGIX HEATED HOLDING CABINETS (insulated aluminum with mechanical controls)

Since 1947, Foodservice Equipment That Delivers!

PRECISION ENGINEERED HEAT DUCT SYSTEM... Heat duct provides even and efficient heating throughout the entire cabinet for safe and consistent results.

FOUR SIZES... HL3 series cabinets are available in under-counter, 1/2 size, 3/4 size and full size.



HL3-18
(full size cabinet)

FIELD REVERSIBLE DOOR(S)... Wobble-free, single pane tempered glass door for easy viewing of cabinet contents, with magnetic door latch and heavy-duty hinges. Full perimeter santoprene gasket attached to door for best seal.

EASY-TO-USE DIAL CONTROL... Simple analog dial for heat setting and master on/off switch. Temperature range of 85°F to 190°F. Recessed angle control panel with easy to read digital thermometer.



PAN SLIDES... Universal wire slides at fixed spacing of 3". Assemblies removable. Hold 18"x26" sheet pans, 12"x20" steam table pans, 2/1 or 1/2 G/N pans. Adjustable universal stainless steel pan slides or fixed angle slides are optional.



Standard universal wire slides



Optional stainless steel adjustable universal slides



Optional fixed angle slides