



# Logix4 Series

## hotLOGIX HEATED HOLDING & PROOFING CABINETS

(insulated aluminum with mechanical controls)


CARTER-HOFFMANN



FOOD SERVICE EQUIPMENT  
HUMIDIFIED HOLDING CABINETS

# SPECIFICATIONS

Printed in U.S.A. E74 1110  
Carter-Hoffmann is a trademark  
of Carter-Hoffmann LLC

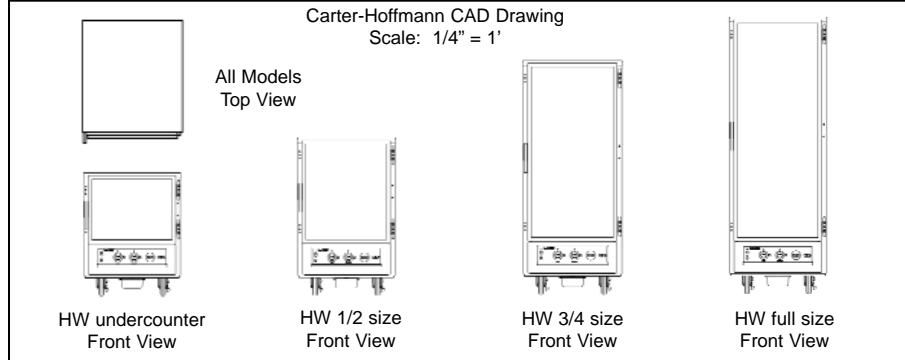

Model Number	Pan/Tray Capacity		Spacing		Inside Working Height		Overall Dimensions						Caster Diameter		Shipping Weight	
	12"x20"	18"x26"	in	mm	in	mm	Height		Depth		Width		in	mm	lbs	kg
<input type="checkbox"/> HWU5A1GM	10	5	3	76	15 <sup>1</sup> / <sub>4</sub>	387	31 <sup>5</sup> / <sub>8</sub>	803	31 <sup>1</sup> / <sub>2</sub>	800	26 <sup>1</sup> / <sub>2</sub>	673	5	127	113	51
<input type="checkbox"/> HWC10A1GM	-	10	1 <sup>1</sup> / <sub>2</sub>	38	15 <sup>1</sup> / <sub>4</sub>	387	31 <sup>5</sup> / <sub>8</sub>	803	31 <sup>1</sup> / <sub>2</sub>	800	26 <sup>1</sup> / <sub>2</sub>	673	5	127	100	45
<input type="checkbox"/> HWF5A1GM	10	5	3	76	15 <sup>1</sup> / <sub>4</sub>	387	31 <sup>5</sup> / <sub>8</sub>	803	31 <sup>1</sup> / <sub>2</sub>	800	26 <sup>1</sup> / <sub>2</sub>	673	5	127	104	47
<input type="checkbox"/> HWU8A1GM	16	8	3	76	24 <sup>1</sup> / <sub>4</sub>	616	40 <sup>5</sup> / <sub>8</sub>	1032	31 <sup>1</sup> / <sub>2</sub>	800	26 <sup>1</sup> / <sub>2</sub>	673	5	127	159	72
<input type="checkbox"/> HWC16A1GM	-	16	1 <sup>1</sup> / <sub>2</sub>	38	24 <sup>1</sup> / <sub>4</sub>	616	40 <sup>5</sup> / <sub>8</sub>	1032	31 <sup>1</sup> / <sub>2</sub>	800	26 <sup>1</sup> / <sub>2</sub>	673	5	127	141	64
<input type="checkbox"/> HWF8A1GM	16	8	3	76	24 <sup>1</sup> / <sub>4</sub>	616	40 <sup>5</sup> / <sub>8</sub>	1032	31 <sup>1</sup> / <sub>2</sub>	800	26 <sup>1</sup> / <sub>2</sub>	673	5	127	147	67
<input type="checkbox"/> HWU14A1GM	28	14	3	76	42 <sup>1</sup> / <sub>4</sub>	1073	58 <sup>5</sup> / <sub>8</sub>	1489	31 <sup>1</sup> / <sub>2</sub>	800	26 <sup>1</sup> / <sub>2</sub>	673	5	127	183	83
<input type="checkbox"/> HWC28A1GM	-	28	1 <sup>1</sup> / <sub>2</sub>	38	42 <sup>1</sup> / <sub>4</sub>	1073	58 <sup>5</sup> / <sub>8</sub>	1489	31 <sup>1</sup> / <sub>2</sub>	800	26 <sup>1</sup> / <sub>2</sub>	673	5	127	163	74
<input type="checkbox"/> HWF14A1GM	28	14	3	76	42 <sup>1</sup> / <sub>4</sub>	1073	58 <sup>5</sup> / <sub>8</sub>	1489	31 <sup>1</sup> / <sub>2</sub>	800	26 <sup>1</sup> / <sub>2</sub>	673	5	127	170	77
<input type="checkbox"/> HWU18A1GM	36	18	3	76	54 <sup>1</sup> / <sub>4</sub>	1378	70 <sup>5</sup> / <sub>8</sub>	1794	31 <sup>1</sup> / <sub>2</sub>	800	26 <sup>1</sup> / <sub>2</sub>	673	5	127	235	107
<input type="checkbox"/> HWC36A1GM	-	36	1 <sup>1</sup> / <sub>2</sub>	38	54 <sup>1</sup> / <sub>4</sub>	1378	70 <sup>5</sup> / <sub>8</sub>	1794	31 <sup>1</sup> / <sub>2</sub>	800	26 <sup>1</sup> / <sub>2</sub>	673	5	127	205	93
<input type="checkbox"/> HWF18A1GM	36	18	3	76	54 <sup>1</sup> / <sub>4</sub>	1378	70 <sup>5</sup> / <sub>8</sub>	1794	31 <sup>1</sup> / <sub>2</sub>	800	26 <sup>1</sup> / <sub>2</sub>	673	5	127	218	99

**CONSTRUCTION...**Welded & riveted double wall, insulated cabinet construction with cabinet welded to base.

**CABINET MATERIAL...**All aluminum interior and exterior double wall, insulated construction; .063 aluminum exterior with 2V finish.

**BASE FRAME...** .125 natural aluminum

**CASTERS...**5" diameter casters with rubber tread. Four swivel casters. Two casters fitted with brakes.

**DOOR...**Single panel tempered glass door set in extruded aluminum frame. Field reversible. Full width aluminum drip trough with 1/2" drain at base of door. Removable plastic catch pan mounted under base of cabinet. High temperature santoprene gasket mounted to door.

**HINGES...**Adjustable edge mount hinges with chrome plate finish.

**LATCH...**Heavy-duty edge mount latch with magnetic catch.

**INSULATION...** 1" thick high density continuous wrap-around insulation in sides and top.

**TRAY RACK ASSEMBLIES...** Three slide styles with removable assemblies.

**HWU:** Universal 16 gauge stainless steel slides, removable and fully adjustable at 1-1/2" spacing. Standard spacing at 3" centers. Hold 18"x26" sheet pans, 12"x20" steam table pans, 2/1 or 1/2 GN pans.

**HWF:** Universal wire slide at fixed spacing of 3". Assemblies removable. Hold 18"x26" sheet pans, 12"x20" steam table pans, 2/1 or 1/2 G/N pans

**HWC:** Fixed stainless steel angle slides on 1-1/2" centers hold 18"x26" sheet pans.

**THERMOMETER...**Digital thermometer with remote sensing bulb and sensing bulb protector. Displays temperature in one degree increments.

**CONTROLS...**Dial type controls. One dial for heat and one dial for humidity level. Set temperature dial at 3 and humidity dial at 7+ for proofing (approximate temperature of 85°-100°F and 90-95% humidity).

Specifications subject to change through product improvement & innovation.

**WATER RESERVOIR...**Bottom mounted stainless steel water reservoir is part of heater assembly. Element mounted below pan to provide active humidification. Manual fill. Capacity 2.5 quarts.

**HEAT & HUMIDITY SYSTEM...**Bottom mounted heater with one 1700 watt coiled incoloy-sheathed heating element. High impedance protected fan motor. Water reservoir with 350 watt element affixed to bottom. Blower fan circulates air and humidity. Full range thermostat and on/off switch with power indicating light. Separate dial controls for heat and humidity.

**ELECTRICAL CHARACTERISTICS...** Operates on 120 volts, 60 cycle, single phase, 2100 watts, 17.5 amps. Eight foot rubber cord with 3 prong grounding plug. NEMA 5-20P.

**PERFORMANCE...**Capable of heating to 190°F (88°C). Preheat to 160°F (71°C) in approximately 20 minutes. 95% maximum relative humidity.

**ACCESSORIES/OPTIONS...**

- Menu card holder (solid door units only)
- Solid aluminum door with black anodized finish on interior and exterior-replace "G" with "X" in model number
- Extra slide pairs (HWU units only)



**CARTER-HOFFMANN**  
1551 McCormick Ave., Mundelein, IL 60060  
(847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981  
[www.carter-hoffmann.com](http://www.carter-hoffmann.com)  
KaTom Restaurant Supply, Inc.

# FEATURES & BENEFITS

1551 McCormick Avenue, Mundelein, Illinois 60060  
 Tel. (847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981  
[www.carter-hoffmann.com](http://www.carter-hoffmann.com)



**PRECISION ENGINEERED ACTIVE HEAT & HUMIDITY SYSTEM...** Heat duct provides even and efficient heating throughout the entire cabinet for safe and consistent results. Quick heat and humidity recovery. Proofing and holding can be accomplished in one cabinet. Unit provides full power to both heating and humidity elements regardless of whether you are holding or proofing.

**DRIP TROUGH...** Located at base of cabinet to catch condensation. Drain hole in center. Plastic drip pan below trough (provided) to catch condensation.



**FIELD REVERSIBLE DOOR(S)...** Single pane tempered glass door for easy viewing of cabinet contents, with magnetic door latch and heavy-duty hinges. Full perimeter silicone gasket attached to door for best seal.

**FOUR SIZES...** Logix4 series cabinets are available in under-counter (31-5/8" high), 1/2 size (40-5/8" high), 3/4 size (58-5/8" high) and full size (70-5/8" high).

**EASY-TO-USE DIAL CONTROLS...** From proofing to holding, control heat and humidity with separate analog dials and master on/off switch. Temperature range of 85°F to 190°F. Easy to read digital thermometer and recessed control dials, angled for easier reach. Proofing and holding capability in single cabinet. Cabinet can be operated without humidity.



**THREE SLIDE STYLES...** with removable assemblies.

**HWU:** Universal 16 gauge stainless steel slides, removable and fully adjustable at 1-1/2" spacing. Standard spacing at 3" centers. Hold 18"x26" sheet pans, 12"x20" steam table pans, 2/1 or 1/2 GN pans.

**HWF:** Universal wire slide at fixed spacing of 3". Assemblies removable. Hold 18"x26" sheet pans, 12"x20" steam table pans, 2/1 or 1/2 G/N pans

**HWC:** Fixed stainless steel angle slides on 1-1/2" centers hold 18"x26" sheet pans.



HWC fixed angle slides



HWU adjustable universal slides



HWF fixed universal wire slides

