




ENCLOSED MOBILE TRAY CARTS

Two Door, Two Trays Per Slide
(Side Loaded)

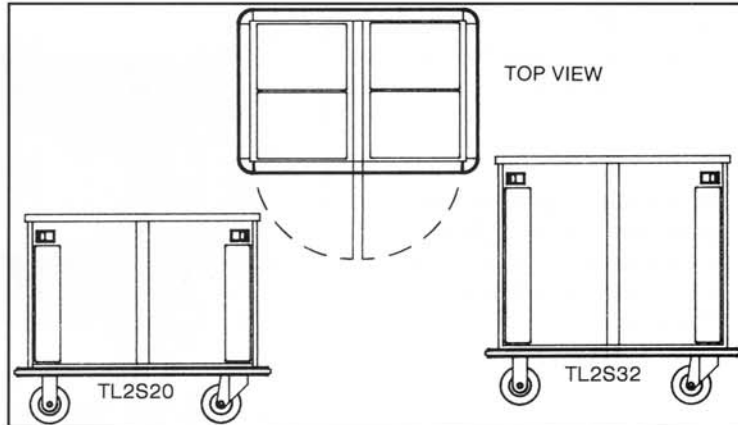

Model Number	Tray Capacity 14 x 18 or 15 x 20 (Specify)	Vertical Tray Spacing	Maximum Inside Working Height in [mm]	WHEELS			DIMENSIONS			Shipping Weight lbs. [kgs]
				Dia in	Swivel	Rigid	Height in [mm]	Depth in [mm]	Width in [mm]	
<input type="checkbox"/> TL2S20	20	5 ³ / ₁₆	28 ¹ / ₂ (724)	8	2	2	43 ³ / ₄ * (1111)	37 ³ / ₁₆ (949)	53 ³ / ₁₆ (1365)	354 (161)
<input type="checkbox"/> TL2S24	24	4 ⁷ / ₁₆	28 ¹ / ₂ (724)	8	2	2	43 ³ / ₄ * (1111)	37 ³ / ₁₆ (949)	53 ³ / ₁₆ (1365)	354 (161)
<input type="checkbox"/> TL2S28	28	4 ¹ / ₁₆	28 ¹ / ₂ (724)	8	2	2	43 ³ / ₄ * (1111)	37 ³ / ₁₆ (949)	53 ³ / ₁₆ (1365)	354 (161)
<input type="checkbox"/> TL2S32	32	4 ⁹ / ₁₆	36 ¹ / ₂ (927)	8	2	2	51 ¹ / ₁₆ (1318)	37 ³ / ₁₆ (949)	53 ³ / ₁₆ (1365)	380 (173)
<input type="checkbox"/> TL2S36	36	4 ¹ / ₁₆	36 ¹ / ₂ (927)	8	2	2	51 ¹ / ₁₆ (1318)	37 ³ / ₁₆ (949)	53 ³ / ₁₆ (1365)	380 (173)

*Add 2¹/₁₆" (54mm) to height for top-mounted push handle.

CONSTRUCTION...Welded cabinet construction. Outer cabinet formed and welded to base. All seams turned in to simplify cleaning and eliminate raw edges.

CABINET MATERIALS...18 gauge, nickel-bearing type 300 series stainless steel with polished exterior wall.

BASE FRAME...12 gauge stainless steel caster bolsters with 1"x 1" tubular stainless steel perimeter channel supports.

CASTERS...8" diameter, industrial grade casters with non-marking rubber tread. Delrin sleeve axle bearings and double ball bearing swivel with Zerk grease fittings. Two casters are fixed and two are swivel. Casters are plate mounted and bolted to base.

WHEEL AHEAD PATTERN...Casters are mounted in an offset pattern so that only one wheel can pass over raised surfaces at one time, for improved control.

BUMPER...Non-marking gray vinyl bumper set in heavy duty 3/16" extruded aluminum frame with reinforced corner "cutouts".

DOORS...Double wall, stainless steel construction. Door cavity filled with 1" thick fiberglass insulation for sound deadening. Center hung, allowing 180° door swing. Full length door stop is formed in cabinet.

LATCHES...Flush mounted sliding latch with adjustable door strike; custom designed for heavy duty applications.

HINGES...12 gauge stainless steel with 3/8" pin.

PUSH HANDLE...1" diameter stainless steel mounted on end or top, depending on model. Push handle extends the full depth of the cabinet.

VENTS...Louvered vents on both ends to allow escape of excessive heat and moisture build up.

STYLING...Stainless steel finish with functional vinyl door stripe.

TRAY RACK ASSEMBLIES...18 gauge stainless steel; removable, without tools, for ease of cleaning.

TRAY SLIDES...Two 15" x 20" or 14" x 18" trays per slide, side loaded (please specify tray size). Maximum inside working depth is 30¹/₄".

ACCESSORIES/OPTIONS...

- Polyurethane Tread Casters
- Semi-pneumatic Casters
- All Swivel Casters
- Wheel Brakes
- 6 Wheel Configuration
- Floor Drain With Plug
- Extra Push Handle
- 3 and 4 Sided Top Rail
- Menu Card Holder
- Top Mounted Transport Latch
- Trailer Hitch
- Vinyl Covered Top



Specifications subject to change through product improvement & innovation.

CARTER-HOFFMANN CORP.

1551 McCormick Ave., Mundelein, IL 60060
Tel (847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981
www.carter-hoffmann.com
KaTom Restaurant Supply, Inc.

CARTER-HOFFMANN
11 FOOD SERVICE EQUIPMENT
ENCLOSED MOBILE TRAY CARTS

SPECIFICATIONS

Printed in U.S.A. L10 0599
The name Carter-Hoffmann is a registered trade name of Carter-Hoffmann Corp.