

## SUPER DUTY ANGLE LEDGE UTILITY RACKS 207-SD SERIES

### FEATURES AND BENEFITS:

- Durable utility rack for transport and storage of products on 18" x 26" pans and 14" x 18" trays. Also available for 15" x 20" trays.
- Fully welded framework of structural aluminum extrusions for rigidity and durability. Reinforced for rough handling.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Extruded angle ledge pan supports, riveted and welded in place, accommodate heavy loads. Bottom of pan or tray rests on angle ledges. See reverse side for capacity and pan spacing.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.



207-1812-SD




### ACCESSORIES and OPTIONS (Available at extra cost):

- Pan Stop
- Corner Bumpers
- Vertical Bumpers
- Perimeter Bumper
- Rotary Bumpers (for use with 5" casters)
- Floor Lock (for use with 5" casters)
- Various Caster Options

See page G-36 for accessory details.



## 207-SD Series

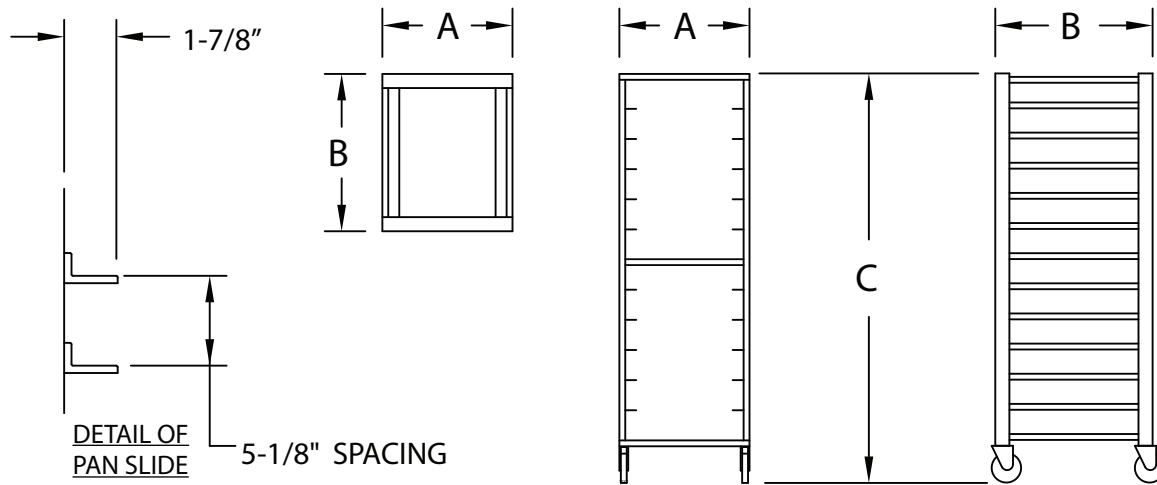

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
207-1812-SD	12	18 x 26	IN	22-7/16	29-5/8	69-3/4	18-5/8	28-7/8	61-1/2	LBS	60
		460 x 660	MM	570	755	1775	475	735	1565	KG	27
207-1524-SD	24	15 x 20	IN	24-5/8	31	69-3/4	20-7/8	30-1/4	61-1/2	LBS	60
		385 x 510	MM	625	790	1775	530	770	1565	KG	27

When ordering bumpers, add 2" to overall dimensions.



Gold indicates our Best Rack with the best warranty in the industry.  
3-Year Parts / 1-Year Labor with lifetime guarantee against rust & corrosion

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

### RACK:

- Posts: Extruded channels, 1-1/16 x 2 x .125.
- Top and bottom: Extruded channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Super duty extruded channels (2) welded at top.
- Super duty tie bars (2) welded at front and back.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Two casters equipped with brakes.

### PAN SLIDES:

- Extruded angles, 1-7/16 x 1-7/8 x .102; riveted and welded to posts on 5-1/8" centers.

### SHORT FORM SPECIFICATIONS

Cres Cor Utility Rack Model 207-\_\_\_\_-SD. Extruded aluminum welded construction with angles riveted and welded. Additional bracing and tie bars. Capacity (\_\_\_\_) \_\_\_\_ x \_\_\_\_ pans on 5-1/8" centers. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -45° to +180°F. 3-Year Parts / 1-Year Labor warranty. Lifetime guarantee against rust & corrosion. Provide the following accessories: \_\_\_\_ \_\_\_\_ \_\_\_\_ . NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833  
Phone: 877/CRESCOR • Fax: 440/350-7267  
www.crescor.com

© Crescent Metal Products, Inc. 2016 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Litho in U.S.A.