




*Fresh ideas in foodservice equipment*



#### Agency Approvals:

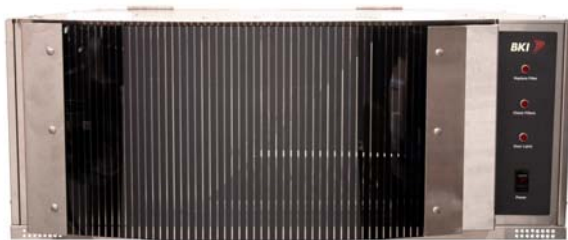

#### Mounting Options:

- Can be mounted to VGG-8 oven at the factory or in the field
- Must be mounted to VGG-16 oven in the field
- May be retrofitted in the field at a later date

## Rotisserie Ventless Hood Model: VGH-8, VGH-16

### *Ventless Extraction Hood System used with VGG-8 and VGG-16 Model Rotisserie Ovens*

Self-contained and free of expensive ductwork, our ventless hood system has an advanced two-stage filtration process that limits the emission of grease laden air from the VGG-8 or VGG-16 rotisserie ovens. This unit meets the current Environmental Protection Agency (EPA) 202 testing standards. A forced maintenance system utilizes signal lights on the unit to alert the operator to check filter placement, replace dirty filters, and latch the hood doors. The VGG oven will shut off automatically if a hood door is opened, a filter is removed or the hood power is turned off.

#### Standard Features:

- Control system in conjunction with two stage filtration keeps grease-laden particles from returning to the air
- Signal light alerts operator to replace dirty filters, check filter placement and latch doors
- Safety circuitry automatically removes power from VGG oven if hood door/filter is ajar or hood power is cut off


**BKI North America**  
PO Box 80400  
Simpsonville, SC 29680-0400 USA  
Telephone: (864) 963-3471  
Toll Free: (800) 927-6887

**BKI Europe**  
Theale Technology Centre  
Station Road • Theale  
Reading • West Berkshire • RG7 4AA  
Telephone: 0870 9904242 • Fax: 0870 9904243



# Rotisserie Ventless Hood (VGH-8, VGH-16)

## Equipment Dimensions:

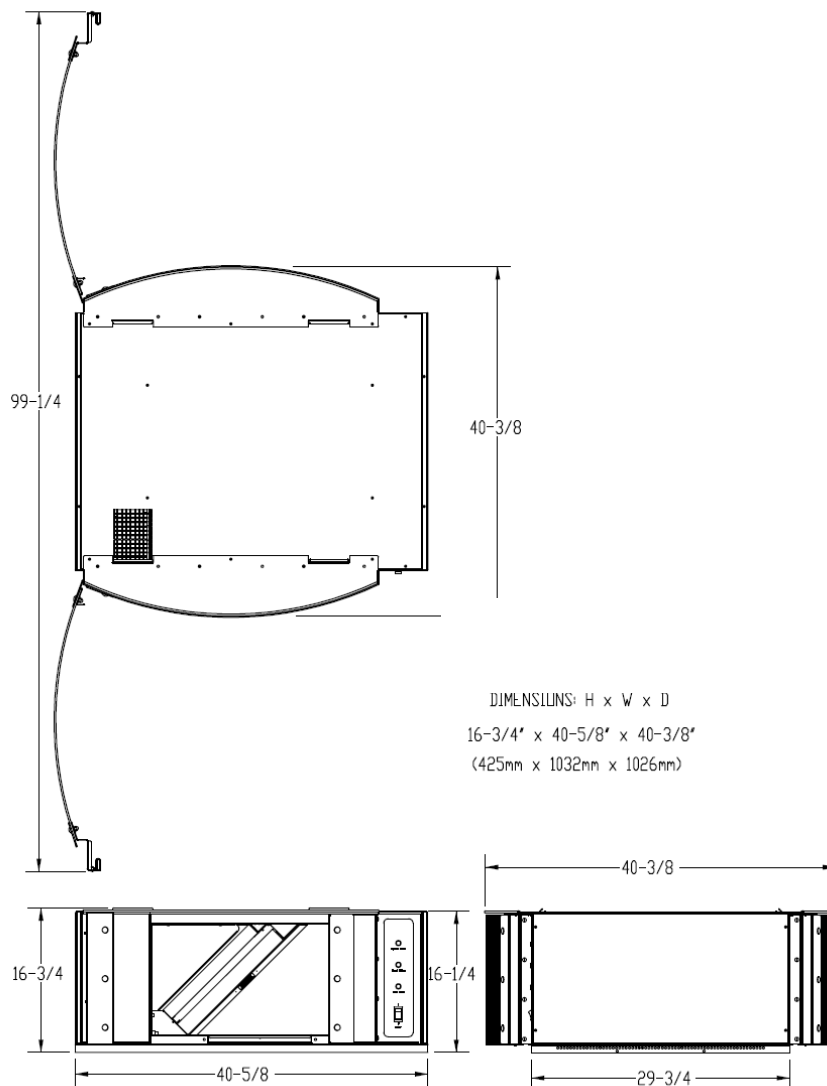

## Mechanical Specifications:

Dimension	Uncrated	Crated
Height	16-3/4" (425mm)	31" (787mm)
Width	40-5/8" (1032mm)	43" (1092mm)
Depth	40-3/8" (1026mm)	46" (1168mm)
Floor Space	10.6 sq. ft (.98 sq. m)	13.7 sq. ft (1.27 sq. m)
Weight	180 lb. (82 kg)	228 lb. (103 kg)

Parameter	Value
Noise Level	58 decibels

## Electrical Ratings:

Voltage	Phase	Amps*
208 - 240	1	1

\* Must be added to the VGG (rotisserie) rated amps to correctly size full load amperage of combined unit.

**BKI North America**  
 PO Box 80400  
 Simpsonville, SC 29680-0400 USA  
 Telephone: (864) 963-3471  
 Toll Free: (800) 927-6887

**BKI Europe**  
 Theale Technology Centre  
 Station Road • Theale  
 Reading • West Berkshire • RG7 4AA  
 Telephone: 0870 9904242 • Fax: 0870 9904243

