TRUE MANUFACTURING CO., INC. U.S.A. FOODSERVICE DIVISION	Project Name: Location:	
001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 : (636)272-2408 • Toll Free (800)325-6152 • Intl Fax# (001)636-272-7546	Item #: Qty:	Γ

Fax (636)272-2408 • Toll Free (800)325-6152 • Intl Fax# (001)636-272-7546 Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com

Model #:

#:	Qty:	SIS #
el #: _		

Model:

TBB-24-48G-SD-HC-LD

Underbar Refrigeration:

Glass Slide Door 24" Back Bar Cooler with LED Lighting & Hydrocarbon Refrigerant



# TBB-24-48G-SD-HC-LD

AIA #

- True's refrigerated back bar coolers are designed with enduring quality and value. Our commitment to using the highest quality materials and oversized refrigeration assures colder product temperatures and years of trouble free service.
- Oversized, factory balanced, refrigeration system holds 33°F to 38°F (.5°C to 3.3°C).
- Exterior heavy duty, wear resistant laminated black vinyl front and sides. Matching black aluminum back. All stainless steel counter top.
- Interior Stainless steel floor with ½" (13 mm) reinforced lip and heavy gauge galvanized steel walls.
- NSF/ANSI Standard 7 compliant for packaged and bottled product.
- Self-closing, positive seal doors.
- "Low-E", double pane thermal insulated glass door assemblies. The latest in energy efficient technology.
- Entire cabinet structure is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

Specifications subject to change without notice.

2.13

139

N/A

## ROUGH-IN DATA

Chart dimensions rounded up to the nearest 1/8" (millimeters rounded up to next whole number).																	
		Capac	ity		(inches)				Cabinet Dimensions (inches) (mm)							Cord Length	Crated Weight
		12 oz.	1⁄2			· ,					NEMA	(total ft.)	(lbs.)				
Model	Doors	Cans	Barrels	Shelves	L	D†	Н	ΗP	Voltage	Amps	Config.	(total m)	(kg)				
TBB-24-48G-SD-HC-LD	2	48 6-pks	2	4	491⁄8	24½	35%	1⁄5	115/60/1	2.1	5-15P	7	305				

623

905 N/A

1248

† Depth does not include 1" (26 mm) for rear bumpers.

Note: Slide doors must be removed to place <sup>1</sup>/<sub>2</sub> barrels in cabinet and then reinstalled.

MADE WITH INTHE USA	APPROVALS:	AVAILABLE AT:
9/18 Printed in U.S.A.		

#### Model:

### TBB-24-48G-SD-HC-

# Underbar Refrigeration:

Glass Slide Door 24<sup>"</sup> Back Bar Cooler with LED Lighting & Hydrocarbon Refrigerant



### STANDARD FEATURES

#### DESIGN

 True's refrigerated back bar coolers are designed with enduring quality and value. Our commitment to using the highest quality materials and oversized refrigeration assures colder product temperatures and years of trouble free service.

#### **REFRIGERATION SYSTEM**

- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- State of the art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies and move a more consistent volume of air which produces less heat, reduces energy consumption and provides greater motor reliability.
- Condensing unit accessed from behind front grill, slides out for easy cleaning and maintenance.

#### CABINET CONSTRUCTION

- Exterior heavy duty, wear resistant laminated black vinyl front and sides. Matching black aluminum back. All stainless steel counter top.
- Interior Stainless steel floor with ½" (13 mm) reinforced lip and heavy gauge galvanized steel walls.
- Insulation entire cabinet structure is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Welded, heavy duty steel frame rail, black powder coated for corrosion protection.

#### DOORS

- "Low-E", double pane thermal insulated glass door assemblies. The latest in energy efficient technology.
- Self-closing doors. Counter-balanced weight system for smooth, even, positive closing.

#### SHELVING

- Four (4) adjustable, heavy duty, black PVC coated wire shelves 17 % "L x 16 ¼ "D (442 mm x 413 mm). Four (4) chrome plated shelf clips included per shelf.
- Aluminum shelf support pilasters. Shelves are adjustable on ½" (13 mm) increments.

#### LIGHTING


• LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

#### **MODEL FEATURES**

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- Designed to accommodate a variety of beer kegs. Doors must be removed to place ½ barrels in cabinet and then reinstalled.
- NSF/ANSI Standard 7 compliant for the storage and/or display of packaged or bottled product.

#### ELECTRICAL


 Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.



#### **OPTIONAL FEATURES/ACCESSORIES** Upcharge and lead times may apply.

Upcharge and lead times may apply.

6" (153 mm) standard legs.
6" (153 mm) seismic/flanged legs.
2½" (64 mm) diameter castors.
4" (102 mm) diameter castors.
Additional shelves.
Ratchet locks.

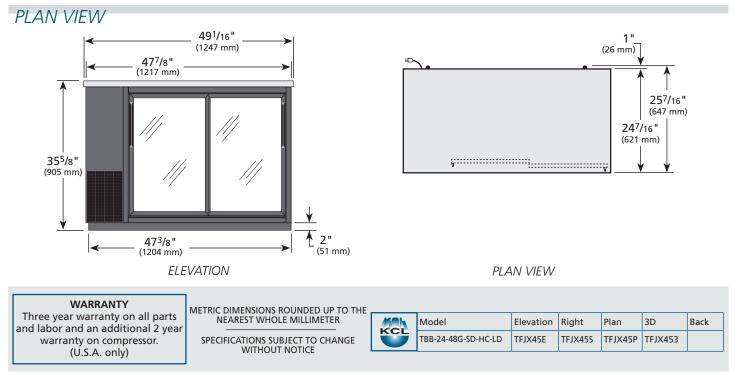

#### **TRUE MANUFACTURING CO., INC.**

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com