Fax (636)272-2408 • Toll Fr	TRUE MANUFACTURING CO., INC. U.S.A. FOODSERVICE DIVISION 'Fallon, Missouri 63366-4434 • (636)240-2400 ee (800)325-6152 • Intl Fax# (001)636-272-7546 arts Dept. Fax# (636)272-9471 • www.truemfg.com	Project Name: Location: Item #: Qty: Model #:	AIA # SIS #
Model: TPP-44D-2	Food Prep Table: Drawered Pizza Prep Table		
		TPP-44D-2	



- True's pizza prep tables are designed with enduring quality that protects your long term investment.
- Oversized, environmentally friendly (R134A) forced-air refrigeration system holds 33°F to 41°F (.5°C to 5°C).
- Complies with and listed under ANSI/NSF-7.
- All stainless steel front, top and ends. Corrosion resistant GalFan coated steel back.
- Stainless steel, patented, foam insulated flat lid keeps pan temperatures colder, locks in freshness, and minimizes condensation.
- Interior attractive, NSF approved, clear coated aluminum liner. Stainless steel floor with coved corners.
- Each drawer accommodates two (2) full size 12"L x 20"W x 8"D (305 mm x 508 mm x 204 mm) pans (sold separately).
- Foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

# ROUGH-IN DATA

ROUGH-IN	IDAIA			Chai	rt dimensio	ons round	led up to the nearest ½			ect to change w ed up to next w	
		Pans	Cabinet Dimensions (inches) (mm)						NEMA	Cord Length (total ft.)	Crated Weight (lbs.)
Model	Drawers	(top)	L**	D†	H*	HP	Voltage	Amps		(total m)	(kg)
TPP-44D-2	2	6	441/2	335⁄8	35%	1⁄3	115/60/1	8.6	5-15P	9	370
			1131	854	899	1⁄3	230-240/50/1	4.2		2.74	168
** Length does not inc	clude¼" (7 mm) eacl			d brackets a	nd thumb s	crews.			▲ Plug	type varies by	country.

\*\* Length does not include<sup>1</sup>/4" (7 mm) each side for cutting board brackets and thumb screws. + Depth does not include 1" (26 mm) for rear bumpers and 3" (77 mm) for cutting board.

\* Height does not include 61/4" (159 mm) for castors or 6" (153 mm) for optional legs.

	APPROVALS:	AVAILABLE AT:
6/18-A Printed in U.S.A.		

# TPP-44D-2

# Food Prep Table: Drawered Pizza Prep Table

# STANDARD FEATURES

#### DESIGN

 True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.

### **REFRIGERATION SYSTEM**

- Factory engineered, self-contained, capillary tube system using environmentally friendly (CFC free) 134A refrigerant.
- Oversized, factory balanced refrigeration system with guided airflow to provide uniform temperature in food pan rail and cabinet interior.
- Forced-air design holds 33°F to 41°F (.5°C to 5°C) product temperature in food pans and cabinet interior. Complies with and listed under ANSI/NSF-7.
- Condensing unit accessed from behind front removable panel, slides out for easy maintenance.

#### **CABINET CONSTRUCTION**

- All stainless steel front, top and ends. Corrosion resistant GalFan coated steel back.
- Interior attractive, NSF approved, clear coated aluminum liner. Stainless steel floor with coved corners.

and labor and an additional 2 year

warranty on compressor.

(U.S.A. only)

- Insulation entire cabinet structure and drawer facings are foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- 5" (127 mm) diameter stem castors. 36" (915 mm) work surface height.

#### DRAWERS

- Stainless steel exterior drawer facings and liners. Stainless steel drawer frames.
- Drawer fitted with 12" (305 mm) long recessed handle that is foamed-in-place with a sheet metal interlock to ensure permanent attachment.
- Magnetic drawer gaskets of one piece construction, removable without tools for ease of cleaning.
- Heavy-duty stainless steel drawer slides and rollers. Removable without tools for easy cleaning.
- Each drawer accommodates two (2) full size 12"L x 20"W x 8"D (305 mm x 508 mm x 204 mm) food pans (sold separately). Drawer will support varying pan configurations with pan dividers bars (drawer pans and divider bars optional).

## **MODEL FEATURES**

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- Extra-deep 19<sup>1</sup>/<sub>2</sub>" (496 mm), full length removable cutting board included.
  Sanitary, high-density, NSF approved white polyethylene provides tough preparation surface.

- Stainless steel, patented, foam insulated flat lid keeps pan temperatures colder, locks in freshness, and minimizes condensation.
- Refrigerated pan rail comes standard with six (1/s size) 12 3/4 "L x 6 1/4" W x 6"D (324 mm x 159 mm x 153 mm) NSF approved clear polycarbonate insert pans.
- NSF/ANSI Standard 7 compliant for open food product.

## **ELECTRICAL**

• Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.

115/60/1 NEMA-5-15R


## **OPTIONAL FEATURES/ACCESSORIES**

Upcharge and lead times may apply. 230 - 240V / 50 Hz.

- G" (153 mm) standard legs.
- $\square$  6" (153 mm) seismic/flanged legs.
- □ 4" (102 mm) diameter castors.
- □ 3" (85 mm) diameter castors.
- $\square 2\frac{1}{2}$ " (64 mm) diameter castors.
- Garnish rack.
- Single overshelf.
- Double overshelf.
- □ 19½" (496 mm) deep,½" (13 mm) thick, composite cutting board.
- Pan dividers.
- Exterior round digital temperature display (factory installed).

TFQY703

TFOY70P

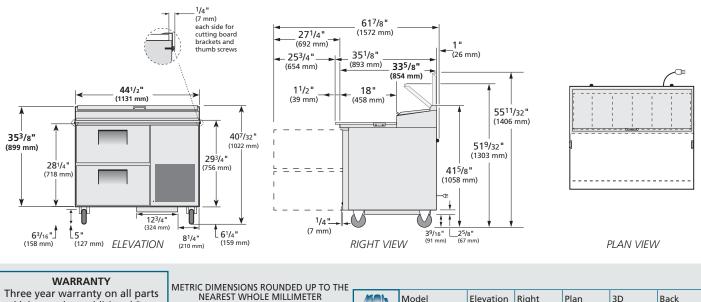

## **TRUE MANUFACTURING CO., INC.**

SPECIFICATIONS SUBJECT TO CHANGE

WITHOUT NOTICE

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com

KCL

TPP-44D-2

TFOY70E

TFOY70S



