# Undercounter models\* with integral air-cooled icemakers

7UC100A - 115 V, 60 Hz, push button

7UD100A - 115 V, 60 Hz, push button for ADA applications

\* Must specify ice-only or ice and water dispensing.

# Note

For use in applications with less than 400 mg/l total dissolved solids in water (either naturally occurring or treated with reverse osmosis).

Not recommended for use with softened water.



7UC100A



7UD100A

Independent third party studies. Contact Follett for details.

\*\*\* Disclaimer: Antimicrobial protection is limited to the treated components and does not treat water or ice. Agion is a registered trademark of Agion Technologies Inc., Wakefield, MA, USA

Innovative solutions, inspired by ice

801 Church Lane • Easton, PA 18040, USA Toll free (800) 523-9361 • +1 (610) 252-7301 Fax +1 (610) 250-0696 • www.follettice.com KaTom Restaurant Supply, Inc.

Undercounter ice-only or ice and water dispenser with integral air-cooled icemaker. Produces up to 125 lbs (57 kg) of Chewblet compressed nugget ice in a 24-hour period. Storage capacity of 7 lbs (3 kg). Designed to serve up to 25 people. The 7 Series can supply up to 140 servings (16 oz cups 2/3 full of ice) per day. Requires water with less than 400 mg/l (ppm) dissolved solids.

## Attractive, space-saving design

- Narrow 14.6" (371 mm) width and 22" (559 mm) depth fits under standard counters to replace existing undercounter icemakers
- ADA model designed to fit under 34" (864 mm) counter
- Attractive, modern styling with soft, blue LED lighting of dispense area
- Capacitive touch user interface

### Maximum placement flexibility

Drainless design allows dispenser to be placed anywhere a water line can be run and eliminates cost of drain installation

# Chewblet ice - the ice that people like

- · Soft, chewable compressed nugget ice
- Preferred over cube-type ice by over 2:1\*\*
- Accepts cups up to 8.5" (216 mm) tall

### Sanitation and safety

- Agion® antimicrobial product protection\*\*\* in key ice and water contact components
- · Sanitary, dispensing of ice to reduce chances of cross-contamination
- Leak detection in icemaking module
- Large, 20 oz capacity, easy-to-empty drip tray
- · Optional internal water filtration

### Easy to clean and maintain

- Automatic alert to empty drip tray
- Easy cleaning of ice machine and bin
- · Easy troubleshooting via user interface and diagnostic circuit board

### **Environmentally responsible**

- State-of-the-art icemaker using R-134a refrigerant automatically loads dispenser and can make up to 125 lbs (57 kg) of ice per day
- Energy and water efficient
- Energy saving sleep mode

### Warranty


- · 2 years parts and labor
- 5 years compressor parts
- Optional 3rd year parts and labor warranty (Item# 00960732)

### **Accessories**

- Drain kit to connect drip tray to a drain (item# 00956375)
- Internally mounted 5 micron particle and carbon water filtration system (item# 00958223)
- Water filter replacement cartridge (5 micron) (item# 00968107)
- SafeCLEAN<sup>™</sup> environmentally responsible icemaker cleaner - Case of (24) 7 oz packets (item# 00132001) - 7 oz single packet (item# 00926030)
- Nu-Calgon IMS-II icemaker sanitizer, 16 oz bottle (item# 00979674)
- Single use cleaning/sanitizing kit (item# 00979856)

# 7 Series

# Undercounter ice and water dispenser with Chewblet® ice icemaker

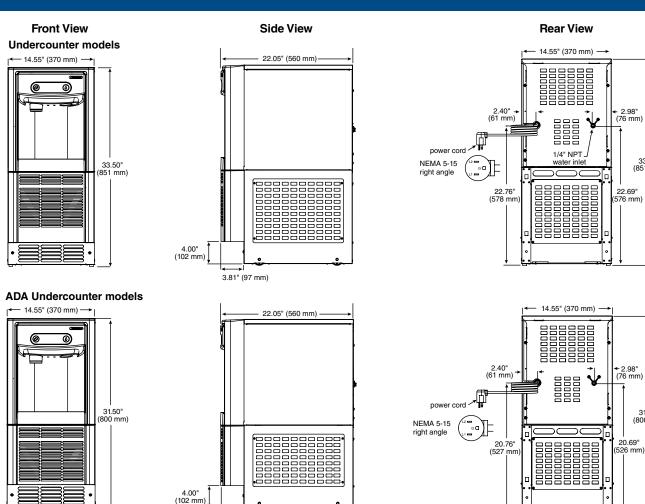

### Notes

For indoor use only.

Designed for commercial use. Follett is not able to provide in-house services for residential installations.

3.81" (97 mm)

#### **Operating limits**

Ambient air temp. range -50 F to 100 F (10 C to 38 C). Water temp. range -40 F to 90 F (4 C to 32 C). Water pressure - 10 psi to 70 psi (69 kpa to 483 kpa).

## Clearances

Required for ventilation	6" (153 mm) front of machine
Required for installation	3" (76 mm) from back of machine

#### Electrical

115 V, 60 Hz, 1 phase, 5 amps. Connect to dedicated 15 amp circuit, fuse or breaker. Note: It is preferred that circuit be protected by a GFCI.

8 ft (2.4 m) cord and NEMA 5-15 right angle plug provided with each dispenser. If local code requires hard-wiring, separate disconnects also required.

# Approximate shipping weight 100 lbs (45 kg)

# **Energy consumption**

KWH per 100 lbs (45.4 kg) ice <sup>†</sup>		
Air-cooled	6.9	
$\pm$ Air temp 00 E (22 C); water temp 70 E (21 C)		

† Air temp. 90 F (32 C); water temp. 70 F (21 C)

Heat rejection 1700 BTU/hr

Water consumption 12 gal (45.4 L) of potable water usage per 100 lbs (45.4 kg) of ice.

# Ice production

125 lbs (56.8 kg) at 70 F (21 C) air and 50 F (10 C) water. 100 lbs (45.4 kg) at 90 F (32 C) air and 70 F (21 C) water.

**Specifications** (Choose one) lce and water \_\_\_\_\_ or ice-only \_\_\_\_\_ dispenser to be Follett automatic load in (choose one) \_\_\_\_\_ 33.5" (851 mm) tall undercounter or \_\_\_\_\_ 31.5" (800 mm) tall ADA undercounter configuration, with 7 lbs (3 kg) of storage. Environmentally responsible R-134a icemaker to be air-cooled. Icemaker to produce approximately 125 lbs (57 kg) of Chewblet compressed nugget ice at air temperature of 70 F (21 C) and water temperature of 50 F (10 C). Icemaker to be equipped with printed circuit board and diagnostics to allow simplified servicing and with capacitive touch user interface. Storage area to be insulated with non-CFC, high density foam-in-place polyurethane. 115 V, 60 Hz, 1 phase. 8 ft cord and NEMA 5-15 right angle plug provided. Dispenser to be ETL and NSF listed. Dispenser to be ETL and NSF listed. Total dissolved solids in water not to exceed 400 mg/l (ppm).

SafeCLEAN is a trademark of Follett Corporation. Chewblet and Follett are registered trademarks of Follett Corporation, registered in the US. Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.



801 Church Lane • Easton, PA 18040, USA Toll free (800) 523-9361 • +1 (610) 252-7301 Fax +1 (610) 250-0696 • www.follettice.com KaTom Restaurant Supply, Inc.



© Follett Corporation Form #3995 06/11

33.50" (851 mm)

31.50"

(800,mm)