


MP 350 Turbo VV



Easy Plug

D Pan capacity up to 50 quarts

▶ Specially designed for intensive use in commercial/institutional catering

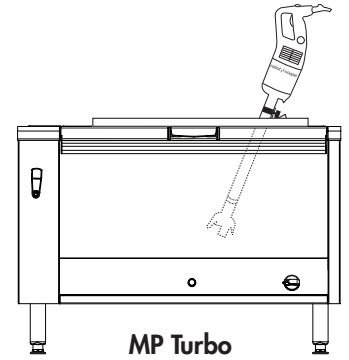

A SALES DESCRIPTION

Ideal for blending soups and puréeing fruit and vegetables. Special institutional catering model intended for intensive use

B TECHNICAL DESCRIPTION

MP 350 Turbo VV Power Mixer. 120V/60/1. Power: 1 HP/660W. Variable speed: 3000 to 10000 rpm. 100% stainless-steel blades, bell and shaft (total length: 14"). "Easy Plug" system featuring detachable power cord

C TECHNICAL CHARACTERISTICS

Effective output	1 HP/600W
Electrical data	120V/60/1 2.3 A – plug supplied
Variable speed	3000 to 10000 rpm
Recyclability	95%
Net weight	15 lbs
Reference	MP350 Turbo VV

E CHARACTERISTICS AND BENEFITS

MOTOR UNIT

- Power 1 HP/600W
- Stainless-steel motor unit with air vents in the top section to ensure watertightness
- Ridge on motor housing serves as a rest and pivot on the pan rim for greater user comfort
- Variable speed: 3000 to 10000 rpm
- Self-regulating speed system
- New patented "Easy Plug" system making it easier to replace the power cord during after-sales servicing
- Cord winding system for tidy storage and optimum lifespan

SHAFT AND BELL

- 100% stainless-steel blades, bell and shaft (total length: 14").
- Foot with detachable bell and blades (patented system exclusive to Robot-Coupe) for optimum sanitation.
- Watertight bell design for optimum lifespan

STANDARD ATTACHMENTS

- Wall-mounted power Mixer holder
- Tool for attaching and detaching the blades

STANDARDS

ETL electrical and sanitation Listed/ cETL (Canada)




MP 350 Turbo VV

MP 350 Turbo VV

F OPTIONAL ATTACHMENTS

- 3 adjustable stainless-steel pan supports:
 - Ref. 27363 – for pans with a diameter of 13" to 26"
 - Ref. 27364 – for pans with a diameter of 20" to 39"
 - Ref. 27365 – for pans with a diameter of 33" to 51"
- 1 universal pan support:
 - Ref. 27354 – screws on to pan rim (fits any size pan diameter)



G DRAWINGS & DIMENSIONS

120V/60/1 – power cord and plug supplied

