KOLPAK®

Polar-Pak. System by Kolpak

General Specifications:

Interior finish: 26 gauge embossed galvalume
Exterior finish: 26 gauge embossed galvalume
Interior floors: ERA .100 smooth aluminum
Insulation: 4" 100% foamed-in place polyurethane
Thermometer: 2" Dial Thermometer
Screeds: 4" vinyl/foam for indoor models
Screeds: Metal for outdoor models

Outdoor Package Requirements

Outdoor applications are determined by the location and reglatory requirements for that area. **Outdoor Polar Pak systems will not be available for areas where winds exceed 110 mph and/or where snow loads are above 20psf**

NOTE: Outdoor Polar-Pak requires outdoor package for refrigeration and roof sealing system. Outdoor units require a field supplied and field installed condensate drainline (including heat tape on freezer drains).

15 business day lead time for Outdoor Models

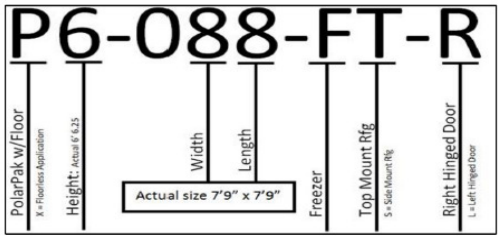

Note 1: Add "R" or "L" to end of Model Numbers above to designate Right or Left Door Hinge.
Note 2: "+" Refrigeration must be on 5 ft. wall

6' Polar-Pak Coolers & Freezers

Coolers: 38°F - 6' 6-1/4" High - Door 26x66

With Floor	Top Mount Model	Side Mount Model	Actual Size	Compressor	Capacity	Fans	Amps	Ship Weight
5x4x6	**P6-054-CT**	**+P6-054-CS**	4'10-1/2"x 3'11"	1/3 hp	80 cu. ft.	1.0	8.4	742
6x4x6	**P6-064-CT**	**+P6-064-CS**	5'10"x 3'11"	1/3 hp	98 cu. ft.	1.0	8.4	879
6x6x6	**P6-066-CT**	**P6-066-CS**	5'10"x 5'10"	1/2 hp	156 cu. ft.	1.0	9.9	1065
6x8x6	**P6-068-CT**	**P6-068-CS**	5'10"x 7'9"	1/2 hp	213 cu. ft.	1.0	9.9	1113
6x10x6	**P6-0610-CT**	**P6-0610-CS**	5'10"x 9'8"	3/4 hp	271 cu. ft.	2.0	16.3	1304
6x12x6	**P6-0612-CT**	**P6-0612-CS**	5'10"x 11'7"	3/4 hp	332 cu. ft.	2.0	16.3	1434
8x6x6	**P6-086-CT**	**P6-086-CS**	7'9" x 5'10"	1/2 hp	80 cu. ft.	1.0	9.9	1113
8x8x6	**P6-088-CT**	**P6-088-CS**	7'9" x 7'9"	3/4 hp	293 cu. ft.	2.0	16.3	1325
8x10x6	**P6-0810-CT**	**P6-0810-CS**	7'9" x 9'8"	3/4 hp	372 cu. ft.	2.0	16.3	1503
8x12x6	**P6-0812-CT**	**P6-0812-CS**	7'9" x 11'7"	1 hp	455 cu. ft.	2.0	16.8	1662
10x6x6	**P6-106-CT**	**P6-106-CS**	9'8" x 5'10"	3/4 hp	271 cu. ft.	2.0	16.3	1304
10x8x6	**P6-108-CT**	**P6-108-CS**	9'8" x 7'9"	3/4 hp	372 cu. ft.	2.0	16.3	1503
10x10x6	**P6-1010-CT**	**P6-1010-CS**	9'8" x 9'8"	3/4 hp	477 cu. ft.	2.0	16.3	1690
12x6x6	**P6-126-CT**	**P6-126-CS**	11'7 x 5'10"	3/4 hp	332 cu. ft.	2.0	16.3	1434
12x8x6	**P6-128-CT**	**P6-128-CS**	11'7" x 7'9"	1 hp	455 cu. ft.	2.0	16.8	1662

Freezers -10°F - 6' 6-1/4" High - Door 26x66

With Floor	Top Mount Model	Side Mount Model	Actual Size	Compressor	Capacity	Fans	Amps	Ship Weight
5x4x6	**P6-054-FT**	**+P6-054-FS**	4'10-1/2"x 3'11"	1 hp	80 cu. ft.	1.0	10.6	879
6x4x6	**P6-064-FT**	**+P6-064-FS**	5'10"x 3'11"	1 hp	98 cu. ft.	1.0	10.6	903
6x6x6	**P6-066-FT**	**P6-066-FS**	5'10"x 5'10"	1 hp	156 cu. ft.	1.0	10.6	1065
6x8x6	**P6-068-FT**	**P6-068-FS**	5'10"x 7'9"	1 1/2 hp	213 cu. ft.	2.0	13.5	1213
6x10x6	**P6-0610-FT**	**P6-0610-FS**	5'10"x 9'8"	1 1/2 hp	271 cu. ft.	2.0	13.5	1369
6x12x6	**P6-0612-FT**	**P6-0612-FS**	5'10"x 11'7"	1 1/2 hp	332 cu. ft.	2.0	13.5	1434
8x6x6	**P6-086-FT**	**P6-086-FS**	7'9" x 5'10"	1 1/2 hp	80 cu. ft.	2.0	13.5	1213
8x8x6	**P6-088-FT**	**P6-088-FS**	7'9" x 7'9"	1 1/2 hp	293 cu. ft.	2.0	13.5	1390
8x10x6	**P6-0810-FT**	**P6-0810-FS**	7'9" x 9'8"	2 hp	372 cu. ft.	2.0	18.8	1568
8x12x6	**P6-0812-FT**	**P6-0812-FS**	7'9" x 11'7"	2 hp	455 cu. ft.	2.0	18.8	1662
10x6x6	**P6-106-FT**	**P6-106-FS**	9'8" x 5'10"	1 1/2 hp	271 cu. ft.	2.0	13.5	1369
10x8x6	**P6-108-FT**	**P6-108-FS**	9'8" x 7'9"	2 hp	372 cu. ft.	2.0	18.8	1568
10x10x6	**P6-1010-FT**	**P6-1010-FS**	9'8" x 9'8"	2 hp	477 cu. ft.	2.0	18.8	1690
12x6x6	**P6-126-FT**	**P6-126-FS**	11'7 x 5'10"	1 1/2 hp	332 cu. ft.	2.0	13.5	1434
12x8x6	**P6-128-FT**	**P6-128-FS**	11'7" x 7'9"	2 hp	455 cu. ft.	2.0	18.8	1662

Coolers: 38°F - 6' 6-1/4" High - Door 26x66

Floorless	Top Mount Model	Side Mount Model	Actual Size	Compressor	Capacity	Fans	Amps	Ship Weight
5x4x6	**PX6-054-CT**	**+PX6-054-CS**	4'10-1/2"x 3'11"	1/3 hp	80 cu. ft.	1.0	8.4	662
6x4x6	**PX6-064-CT**	**+PX6-064-CS**	5'10"x 3'11"	1/3 hp	98 cu. ft.	1.0	8.4	707
6x6x6	**PX6-066-CT**	**PX6-066-CS**	5'10"x 5'10"	1/2 hp	156 cu. ft.	1.0	9.9	821
6x8x6	**PX6-068-CT**	**PX6-068-CS**	5'10"x 7'9"	1/2 hp	213 cu. ft.	1.0	9.9	921
6x10x6	**PX6-610-CT**	**PX6-0610-CS**	5'10"x 9'8"	3/4 hp	271 cu. ft.	2.0	16.3	1064
6x12x6	**PX6-612-CT**	**PX6-0612-CS**	5'10"x 11'7"	3/4 hp	332 cu. ft.	2.0	16.3	1146
8x6x6	**PX6-086-CT**	**PX6-086-CS**	7'9" x 5'10"	1/2 hp	80 cu. ft.	1.0	9.9	977
8x8x6	**PX6-088-CT**	**PX6-088-CS**	7'9" x 7'9"	3/4 hp	293 cu. ft.	2.0	16.3	1069
8x10x6	**PX6-810-CT**	**PX6-0810-CS**	7'9" x 9'8"	3/4 hp	372 cu. ft.	2.0	16.3	1183
8x12x6	**PX6-812-CT**	**PX6-0812-CS**	7'9" x 11'7"	1 hp	455 cu. ft.	2.0	16.8	1253
10x6x6	**PX6-106-CT**	**PX6-106-CS**	9'8" x 5'10"	3/4 hp	271 cu. ft.	2.0	16.3	1064
10x8x6	**PX6-108-CT**	**PX6-108-CS**	9'8" x 7'9"	3/4 hp	372 cu. ft.	2.0	16.3	1183
10x10x6	**PX6-1010-CT**	**PX6-1010-CS**	9'8" x 9'8"	3/4 hp	477 cu. ft.	2.0	16.3	1442
12x6x6	**PX6-126-CT**	**PX6-126-CS**	11'7 x 5'10"	3/4 hp	332 cu. ft.	2.0	16.3	1236
12x8x6	**PX6-128-CT**	**PX6-128-CS**	11'7" x 7'9"	1 hp	455 cu. ft.	2.0	16.8	1346

7' Polar-Pak Coolers & Freezers

Coolers: 38°F - 7' 6-1/4" High - Door 26x78

With Floor	Top Mount Model	Side Mount Model	Actual Size	Compressor	Capacity	Fans	Amps	Ship Weight
5x4x7	**P7-054-CT**	**+P7-054-CS**	4'10-1/2"x 3'11"	1/3 hp	84 cu. ft.	1.0	8.4	1013
6x4x7	**P7-064-CT**	**+P7-064-CS**	5'10"x 3'11"	1/3 hp	116 cu. ft.	1.0	8.4	1013
6x6x7	**P7-066-CT**	**P7-066-CS**	5'10"x 5'10"	1/2 hp	184 cu. ft.	1.0	9.9	1013
6x8x7	**P7-068-CT**	**P7-068-CS**	5'10"x 7'9"	1/2 hp	252 cu. ft.	1.0	9.9	1169
6x10x7	**P7-0610-CT**	**P7-0610-CS**	5'10"x 9'8"	3/4 hp	320 cu. ft.	2.0	16.3	1368
6x12x7	**P7-0612-CT**	**P7-0612-CS**	5'10"x 11'7"	3/4 hp	388 cu. ft.	2.0	16.3	1524
8x6x7	**P7-086-CT**	**P7-086-CS**	7'9" x 5'10"	1/2 hp	252 cu. ft.	1.0	9.9	1169
8x8x7	**P7-088-CT**	**P7-088-CS**	7'9" x 7'9"	3/4 hp	345 cu. ft.	2.0	16.3	1391
8x10x7	**P7-0810-CT**	**P7-0810-CS**	7'9" x 9'8"	3/4 hp	439 cu. ft.	2.0	16.3	1573
8x12x7	**P7-0812-CT**	**P7-0812-CS**	7'9" x 11'7"	1 hp	532 cu. ft.	2.0	16.8	1762
10x6x7	**P7-106-CT**	**P7-106-CS**	9'8" x 5'10"	3/4 hp	320 cu. ft.	2.0	16.3	1368
10x8x7	**P7-108-CT**	**P7-108-CS**	9'8" x 7'9"	3/4 hp	439 cu. ft.	2.0	16.3	1573
10x10x7	**P7-1010-CT**	**P7-1010-CS**	9'8" x 9'8"	1 hp	558 cu.ft.	2.0	16.8	1790
12x6x7	**P7-126-CT**	**P7-126-CS**	11'7 x 5'10"	3/4 hp	388 cu. ft.	2.0	16.3	1524
12x8x7	**P7-128-CT**	**P7-128-CS**	11'7" x 7'9"	1 hp	532 cu. ft.	2.0	16.8	1762

Freezer: -10°F - 7' 6-1/4" High - Door 26x78

With Floor	Top Mount Model	Side Mount Model	Actual Size	Compressor	Capacity	Fans	Amps	Ship Weight
5x4x7	**P7-054-FT**	**+P7-054-FS**	4'10-1/2"x 3'11"	1 hp	84 cu. ft.	1.0	10.6	1013
6x4x7	**P7-064-FT**	**+P7-064-FS**	5'10"x 3'11"	1 hp	116 cu. ft.	1.0	10.6	1013
6x6x7	**P7-066-FT**	**P7-066-FS**	5'10"x 5'10"	1 hp	184 cu. ft.	1.0	10.6	1113
6x8x7	**P7-068-FT**	**P7-068-FS**	5'10"x 7'9"	1 1/2 hp	252 cu. ft.	2.0	13.5	1269
6x10x7	**P7-0610-FT**	**P7-0610-FS**	5'10"x 9'8"	1 1/2 hp	320 cu. ft.	2.0	13.5	1433
6x12x7	**P7-0612-FT**	**P7-0612-FS**	5'10"x 11'7"	1 1/2 hp	388 cu. ft.	2.0	13.5	1524
8x6x7	**P7-086-FT**	**P7-086-FS**	7'9" x 5'10"	1 1/2 hp	252 cu. ft.	2.0	13.5	1269
8x8x7	**P7-088-FT**	**P7-088-FS**	7'9" x 7'9"	1 1/2 hp	345 cu. ft.	2.0	13.5	1456
8x10x7	**P7-0810-FT**	**P7-0810-FS**	7'9" x 9'8"	2 hp	439 cu. ft.	2.0	18.8	1573
8x12x7	**P7-0812-FT**	**P7-0812-FS**	7'9" x 11'7"	2 hp	532 cu. ft.	2.0	18.8	1762
10x6x7	**P7-106-FT**	**P7-106-FS**	9'8" x 5'10"	1 1/2 hp	320 cu. ft.	2.0	13.5	1433
10x8x7	**P7-108-FT**	**P7-108-FS**	9'8" x 7'9"	2 hp	439 cu. ft.	2.0	18.8	1638
10x10x7	**P7-1010-FT**	**P7-1010-FS**	9'8" x 9'8"	2 hp	558 cu.ft.	2.0	18.8	1790
12x6x7	**P7-126-FT**	**P7-126-FS**	11'7 x 5'10"	1 1/2 hp	388 cu. ft.	2.0	13.5	1524
12x8x7	**P7-128-FT**	**P7-128-FS**	11'7" x 7'9"	2 hp	532 cu. ft.	2.0	18.8	1762

Coolers: 38°F - 7' 6-1/4" High - Door 26x78

Floorless	Top Mount Model	Side Mount Model	Actual Size	Compressor	Capacity	Fans	Amps	Ship Weight
5x4x7	**PX7-054-CT**	**+PX7-054-CS**	4'10-1/2"x 3'11"	1/3 hp	84 cu. ft.	1.0	8.4	869
6x4x7	**PX7-064-CT**	**+PX7-064-CS**	5'10"x 3'11"	1/2 hp	116 cu. ft.	1.0	9.9	869
6x6x7	**PX7-066-CT**	**PX7-066-CS**	5'10"x 5'10"	1/2 hp	184 cu. ft.	1.0	9.9	869
6x8x7	**PX7-068-CT**	**PX7-068-CS**	5'10"x 7'9"	3/4 hp	252 cu. ft.	2.0	16.3	977
6x10x7	**PX7-0610-CT**	**PX7-0610-CS**	5'10"x 9'8"	3/4 hp	320 cu. ft.	2.0	16.3	1128
6x12x7	**PX7-0612-CT**	**PX7-0612-CS**	5'10"x 11'7"	3/4 hp	388 cu. ft.	2.0	16.3	1236
8x6x7	**PX7-086-CT**	**PX7-086-CS**	7'9" x 5'10"	3/4 hp	252 cu. ft.	2.0	16.3	977
8x8x7	**PX7-088-CT**	**PX7-088-CS**	7'9" x 7'9"	3/4 hp	345 cu. ft.	2.0	16.3	1135
8x10x7	**PX7-0810-CT**	**PX7-0810-CS**	7'9" x 9'8"	1 hp	439 cu. ft.	2.0	16.8	1253
8x12x7	**PX7-0812-CT**	**PX7-0812-CS**	7'9" x 11'7"	1 hp	532 cu. ft.	2.0	16.8	1346
10x6x7	**PX7-106-CT**	**PX7-106-CS**	9'8" x 5'10"	3/4 hp	320 cu. ft.	2.0	16.3	1128
10x8x7	**PX7-108-CT**	**PX7-108-CS**	9'8" x 7'9"	1 hp	439 cu. ft.	2.0	16.8	1253
10x10x7	**PX7-1010-CT**	**PX7-1010-CS**	9'8" x 9'8"	1hp	558 cu.ft.	2.0	16.8	1442
12x6x7	**PX7-126-CT**	**PX7-126-CS**	11'7 x 5'10"	3/4 hp	388 cu. ft.	2.0	16.3	1236
12x8x7	**PX7-128-CT**	**PX7-128-CS**	11'7" x 7'9"	1 hp	532 cu. ft.	2.0	16.8	1346

Polar-Pak System by Kolpak

Quick-Ship Program Units

The following Polar-Pak units are available under the "Quick-Ship" program.
QS Models Ship in 48-Hours.

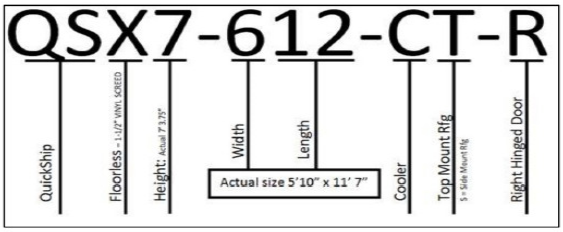

General Specifications:
Interior finish: 26 gauge embossed galvalume
Exterior finish: 26 gauge embossed galvalume
Interior floors: ERA .100 smooth aluminum
Insulation: 4" 100% foamed-in place polyurethane
Thermometer: 2" Dial Thermometer

1: Add "R" or "L" to end of Model Numbers above to designate Right or Left Door Hinge.
2: "+" Refrigeration must be on 5 ft. wall
Mount refrigeration only for quick ship program. Actual height for units without floors is 6' 3 3/4". Actual height for units with floors is 6' 6 1/4". 26 x 66 door,
or left hinged, no options.26 gauge Stucco Embossed Galvalume Steel, interior and exterior. Outdoor units not available as Quick Ship.

6' Quick-Ship Polar-Paks Coolers & Freezers

Coolers: 38°F - 6'-6-1/4" High

With Floor	Model	Actual Size	Capacity	Model	Fans	Compressor	Amps	Electrical	Ship Weight
5x4x6	**QS6-054-CT**	4'10-1/2"x 3'11"	80 cu. ft.	PC039T2	1	1/3 hp	8.4	115/60/1	742
6x4x6	**QS6-064-CT**	5'10"x 3'11"	98 cu. ft.	PC039T2	1	1/3 hp	8.4	115/60/1	879
6x6x6	**QS6-066-CT**	5'10"x 5'10"	156 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	1065
6x8x6	**QS6-068-CT**	5'10"x 7'9"	213 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	1113
6x10x6	**QS6-0610-CT**	5'10"x 9'8"	271 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1304
6x12x6	**QS6-0612-CT**	5'10"x 11'7"	332 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1434
8x6x6	**QS6-086-CT**	7'9" x 5'10"	80 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	1113
8x8x6	**QS6-088-CT**	7'9" x 7'9"	293 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1325
8x10x6	**QS6-0810-CT**	7'9" x 9'8"	372 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1503
8x12x6	**QS6-0812-CT**	7'9" x 11'7"	455 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1662
10x6x6	**QS6-106-CT**	9'8" x 5'10"	271 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1304
10x8x6	**QS6-108-CT**	9'8" x 7'9"	372 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1503
10x10x6	**QS6-1010-CT**	9'8" x 9'8"	477 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1690
12x6x6	**QS6-126-CT**	11'7 x 5'10"	332 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1434
12x8x6	**QS6-128-CT**	11'7" x 7'9"	455 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1662

Freezers -10°F - 6'6-1/4" High

With Floor	Model	Actual Size	Capacity	Model	Fans	Compressor	Amps	Electrical	Ship Weight
5x4x6	**QS6-054-FT**	4'10-1/2"x 3'11"	80 cu. ft.	PF094T3	1	1 hp	10.6	208-230/60/1	879
6x4x6	**QS6-064-FT**	5'10"x 3'11"	98 cu. ft.	PF094T3	1	1 hp	10.6	208-230/60/1	903
6x6x6	**QS6-066-FT**	5'10"x 5'10"	156 cu. ft.	PF094T3	1	1 hp	10.6	208-230/60/1	1065
6x8x6	**QS6-068-FT**	5'10"x 7'9"	213 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1213
6x10x6	**QS6-0610-FT**	5'10"x 9'8"	271 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1369
6x12x6	**QS6-0612-FT**	5'10"x 11'7"	332 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1434
8x6x6	**QS6-086-FT**	7'9" x 5'10"	80 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1213
8x8x6	**QS6-088-FT**	7'9" x 7'9"	293 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1390
8x10x6	**QS6-0810-FT**	7'9" x 9'8"	372 cu. ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1568
8x12x6	**QS6-0812-FT**	7'9" x 11'7"	455 cu. ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1662
10x6x6	**QS6-106-FT**	9'8" x 5'10"	271 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1369
10x8x6	**QS6-108-FT**	9'8" x 7'9"	372 cu. ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1568
10x10x6	**QS6-1010-FT**	9'8" x 9'8"	477 cu. ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1690
12x6x6	**QS6-126-FT**	11'7 x 5'10"	332 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1434
12x8x6	**QS6-128-FT**	11'7" x 7'9"	455 cu. ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1662

Coolers: 38°F - 6'-3-3/4" High

Floorless	Model	Actual Size	Capacity	Model	Fans	Compressor	Amps	Electrical	Ship Weight
5x4x6	**QSX6-054-CT**	4'10-1/2"x 3'11"	80 cu. ft.	PC039T2	1	1/3 hp	8.4	115/60/1	662
6x4x6	**QSX6-064-CT**	5'10"x 3'11"	98 cu. ft.	PC039T2	1	1/3 hp	8.4	115/60/1	707
6x6x6	**QSX6-066-CT**	5'10"x 5'10"	156 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	821
6x8x6	**QSX6-068-CT**	5'10"x 7'9"	213 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	921
6x10x6	**QSX6-0610-CT**	5'10"x 9'8"	271 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1064
6x12x6	**QSX6-0612-CT**	5'10"x 11'7"	332 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1146
8x6x6	**QSX6-086-CT**	7'9" x 5'10"	80 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	977
8x8x6	**QSX6-088-CT**	7'9" x 7'9"	293 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1069
8x10x6	**QSX6-0810-CT**	7'9" x 9'8"	372 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1183
8x12x6	**QSX6-0812-CT**	7'9" x 11'7"	455 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1253
10x6x6	**QSX6-106-CT**	9'8" x 5'10"	271 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1064
10x8x6	**QSX6-108-CT**	9'8" x 7'9"	372 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1183
10x10x6	**QSX6-1010-CT**	9'8" x 9'8"	477 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1442
12x6x6	**QSX6-126-CT**	11'7 x 5'10"	332 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1236
12x8x6	**QSX6-128-CT**	11'7" x 7'9"	455 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1346

7' Quick-Ship Polar-Paks Coolers & Freezers

Coolers: 38°F - 7'-6-1/4" High

With Floor	Model	Actual Size	Capacity	Model	Fans	Compressor	Amps	Electrical	Ship Weight
5x4x7	**QS7-054-CT**	4'10-1/2"x 3'11"	84 cu. ft.	PC039T2	1	1/3 hp	8.4	115/60/1	1013
6x4x7	**QS7-064-CT**	5'10"x 3'11"	116 cu. ft.	PC039T2	1	1/3 hp	8.4	115/60/1	1013
6x6x7	**QS7-066-CT**	5'10"x 5'10"	184 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	1013
6x8x7	**QS7-068-CT**	5'10"x 7'9"	252 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	1169
6x10x7	**QS7-0610-CT**	5'10"x 9'8"	320 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1368
6x12x7	**QS7-0612-CT**	5'10"x 11'7"	388 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1524
8x6x7	**QS7-086-CT**	7'9" x 5'10"	252 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	1169
8x8x7	**QS7-088-CT**	7'9" x 7'9"	345 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1391
8x10x7	**QS7-0810-CT**	7'9" x 9'8"	439 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1573
8x12x7	**QS7-0812-CT**	7'9" x 11'7"	532 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1762
10x6x7	**QS7-106-CT**	9'8" x 5'10"	320 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1368
10x8x7	**QS7-108-CT**	9'8" x 7'9"	439 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1573
10x10x7	**QS7-1010-CT**	9'8" x 9'8"	558 cu.ft.	PC099T2	2	1 hp	16.8	115/60/1	1790
12x6x7	**QS7-126-CT**	11'7 x 5'10"	388 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1524
12x8x7	**QS7-128-CT**	11'7" x 7'9"	532 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1762

Freezers -10°F - 7'6-1/4" High

With Floor	Model	Actual Size	Capacity	Model	Fans	Compressor	Amps	Electrical	Ship Weight
5x4x7	**QS7-054-FT**	4'10-1/2"x 3'11"	84 cu. ft.	PF094T3	1	1 hp	10.6	208-230/60/1	1013
6x4x7	**QS7-064-FT**	5'10"x 3'11"	116 cu. ft.	PF094T3	1	1 hp	10.6	208-230/60/1	1013
6x6x7	**QS7-066-FT**	5'10"x 5'10"	184 cu. ft.	PF094T3	1	1 hp	10.6	208-230/60/1	1113
6x8x7	**QS7-068-FT**	5'10"x 7'9"	252 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1269
6x10x7	**QS7-0610-FT**	5'10"x 9'8"	320 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1433
6x12x7	**QS7-0612-FT**	5'10"x 11'7"	388 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1524
8x6x7	**QS7-086-FT**	7'9" x 5'10"	252 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1269
8x8x7	**QS7-088-FT**	7'9" x 7'9"	345 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1456
8x10x7	**QS7-0810-FT**	7'9" x 9'8"	439 cu. ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1573
8x12x7	**QS7-0812-FT**	7'9" x 11'7"	532 cu. ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1762
10x6x7	**QS7-106-FT**	9'8" x 5'10"	320 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1433
10x8x7	**QS7-108-FT**	9'8" x 7'9"	439 cu. ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1638
10x10x7	**QS7-1010-FT**	9'8" x 9'8"	558 cu.ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1790
12x6x7	**QS7-126-FT**	11'7 x 5'10"	388 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1524
12x8x7	**QS7-128-FT**	11'7" x 7'9"	532 cu. ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1762

Coolers: 38°F - 7'-3-3/4" High

Floorless	Model	Actual Size	Capacity	Model	Fans	Compressor	Amps	Electrical	Ship Weight
5x4x7	**QSX7-054-CT**	4'10-1/2"x 3'11"	84 cu. ft.	PC039T2	1	1/3 hp	8.4	115/60/1	869
6x4x7	**QSX7-064-CT**	5'10"x 3'11"	116 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	869
6x6x7	**QSX7-066-CT**	5'10"x 5'10"	184 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	869
6x8x7	**QSX7-068-CT**	5'10"x 7'9"	252 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	977
6x10x7	**QSX7-0610-CT**	5'10"x 9'8"	320 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1128
6x12x7	**QSX7-0612-CT**	5'10"x 11'7"	388 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1236
8x6x7	**QSX7-086-CT**	7'9" x 5'10"	252 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	977
8x8x7	**QSX7-088-CT**	7'9" x 7'9"	345 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1135
8x10x7	**QSX7-0810-CT**	7'9" x 9'8"	439 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1253
8x12x7	**QSX7-0812-CT**	7'9" x 11'7"	532 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1346
10x6x7	**QSX7-106-CT**	9'8" x 5'10"	320 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1128
10x8x7	**QSX7-108-CT**	9'8" x 7'9"	439 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1253
10x10x7	**QSX7-1010-CT**	9'8" x 9'8"	558 cu.ft.	PC099T2	2	1hp	16.8	115/60/1	1442
12x6x7	**QSX7-126-CT**	11'7 x 5'10"	388 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1236
12x8x7	**QSX7-128-CT**	11'7" x 7'9"	532 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1346