IB AGE TO	BEVERAGE-AIR
-----------	--------------

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

P-SERIES TOP MOUNTED REFRIGERATORS

PRT2-1AS Double Solid Door Roll-Thru Refrigerator

MODELS: PRT2-1AS



PRT2-1AS

OPTIONS & ACCESSORIES

- ☐ Stainless steel interior
- Remote option

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel exterior
- Stainless steel interior
- Full electronic control
- LED lighting standard
- Expansion Valve technology
- Self-closing doors on cam-lift hinges, with 120° hold open feature
- One piece snap-in magnetic door gaskets for positive seal
- Stainless steel breakers
- Reinforced stainless steel door ramps outside and cart guides inside
- Accepts carts up to 24 3/8" (W) x 26" (D) x 64 1/2" (H) (Cart not included)
- Wiper gasket at bottom seals door to ramp
- Door locks standard
- Anti-Microbial door handles
- Refrigeration system maintains product temperatures of 36 38°F

REFRIGERATIO N SYSTEM

- Refrigeration system uses R134A
- Automatic, non-electric defrost
- Epoxy coated evaporator coil


















MODEL	PRT2-1AS	
EXTERNAL DIMENSIONAL DATA		
Width Overall	68 7/8"	
Depth Overall with Handle	39 7/8"	
Height Overall	84"	
Number of Doors	2	
Depth with Door Open 90°	99"	
Cart Guide Opening	27 1/2	
Door Opening (in)	27 3/4" x 65 1/4"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	71	
Internal Width Overall (in)	63 5/8"	
Internal Depth Overall (in)	26"	
Internal Height Overall (in)	66 1/8"	
ELECTRICAL DATA		
Full Load Amperes 115/60/1	12.6	
REFRIGERATION DATA		
Horsepower	1/2	
Capacity (BTU/Hr)*	4140	
WEIGHT DATA		
Gross Weight (Crated lbs)	683 lbs	
Height - Crated	88"	
Width - Crated	78"	
Depth - Crated	45"	

P Series - Top Mount Roll-Thru Refrigerator

Models: PRT2-1AS

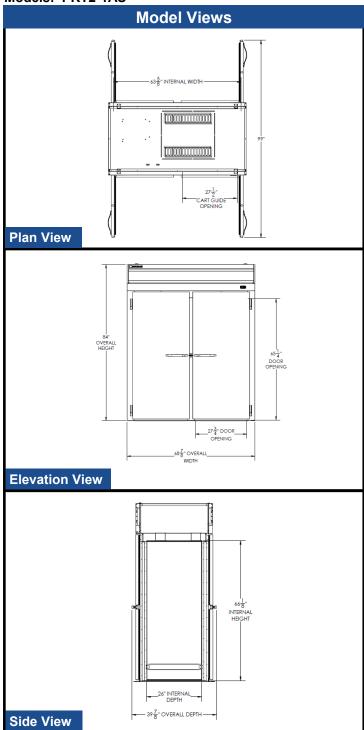

ELECTRICAL CONNECTION

















Units pre-wired at factory and include 8' long cord and plug set.



