Item # _____

Quantity_____

Open Pan & Tray Racks

Aluminum

Model 8528

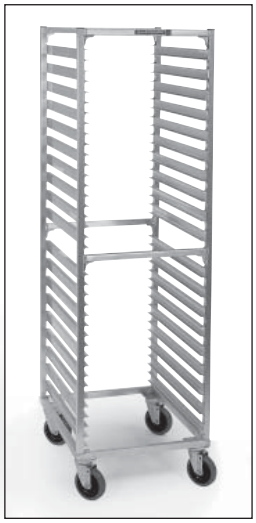

Model 8559

Durable, efficient storage system with all-welded aluminum construction.

- Channel and angle style ledges are continuously welded to the uprights to withstand rugged use.
- Reinforced bottom design provides added durability during offsite transport.
- Accomodates 18" x 26" or 14" x 18" pans and trays.
- Non-marking polyurethane casters
- NSF listed.

Ideal for...

- Hotels, schools, hospitals, and other commercial kitchens.
- Refrigerated or dry storage.
- Inside or remote transport.

NSF

Spec. # _____

AIA # _____

Specifications

Shall be constructed of hi-tensile, corrosion-resistant, rust proof, primary extruded aluminum, Type 6463-T5 alloy. All seams shall be heli-arc welded and sealed (no rivets). Tray ledges 1-¼" x 1-5/8" x .100 extruded aluminum welded to frame on 3" or 5" centers, with channel type ledges to be on 1½" centers. Unit shall have four horizontal supports located at the top and center of 1" x 1" x .070 wall aluminum tube. Corner gussets of 1-½" x 1-½" x 5/8" thick angle shall be welded to the inside angles (bottom side) where horizontal cross bracing meets vertical uprights with a 4½" continuous weld. Unit base shall be constructed of 1" x 1" x .070 wall tube welded into a rectangular frame (20-½" x 26"), with two extra laterals where caster mount reinforcement plates shall be inset. reinforcement caster plates (2-¾" x 4" x 3/8"), pre-tapped for ¼" bolts, shall be welded to this frame. Casters shall be plate mount type, with 5" diameter non-marking polyurethane wheel, full swivel design (two with brakes) with sealed ball bearing races.

LAKESIDE®

Lakeside Manufacturing, Inc.
4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.
800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com

Lit# APTR 0306

Lakeside reserves the right to modify specifications or discontinue models without prior notification.

Printed in the U.S.A.

Open Pan & Tray Racks

Aluminum

Spec. # _____

AIA # _____

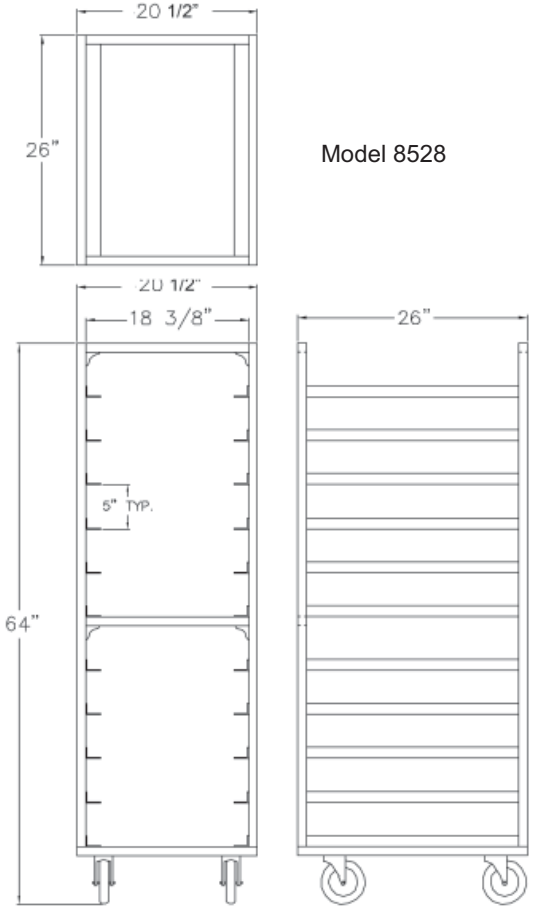

Model 8528

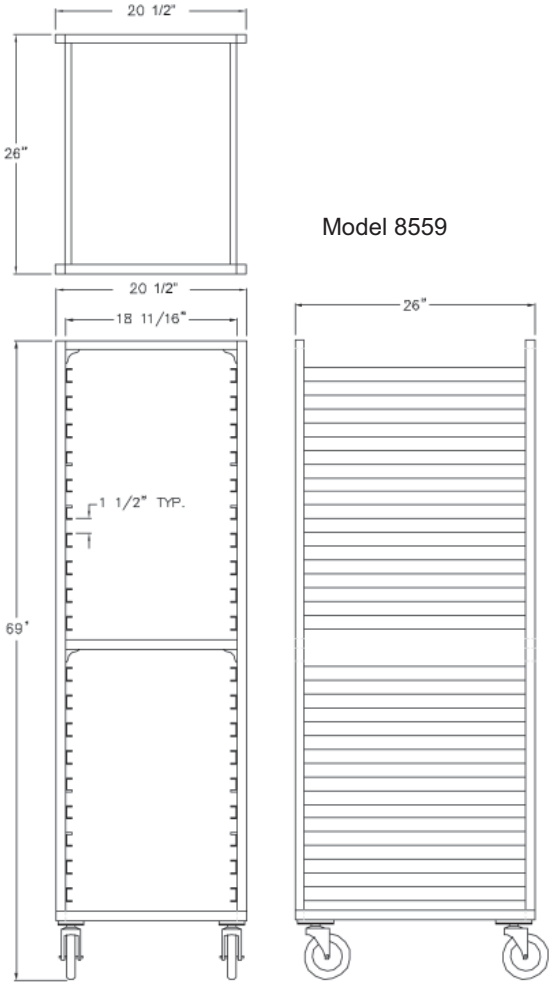

Model 8559

Dimensions

Model	Pan/Tray Capacity		Ledge		Overall Size			Case Wt.
	Full Size	Half Size	Type	Spacing	W	L	H	Lbs.
8522	18	36	Angle	3" (76)	20½" (521	26" 660	63" 1600)	42 (18.9 kg)
8528	11	22	Angle	5" (127)	20½" (521	26" 660	64" 1626)	38 (17.1 kg)
8529	18	36	Angle	3" (76)	20½" (521	26" 660	64" 1626)	48 (21.6 kg)
8547	34	68	Channel	1½" (38)	20½" (521	26" 660	64" 1626)	53 (23.9 kg)
8559	38	76	Channel	1½" (38)	20½" (521	26" 660	69" 1753)	56 (25.2 kg)

Measurements in ( ) denote metric millimeters, unless otherwise specified.

Options

- Break casters (set of 2)
- Perimeter bumper
- Vertical leg bumpers (set of 4)
- Pan stop
- Bottom corner bumpers (set of 4)
- Solid sheet base

LAKESIDE®

Lakeside Manufacturing, Inc.
4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.
800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com

Lit# APTR 0306

Lakeside reserves the right to modify specifications or discontinue models without prior notification.

Printed in the U.S.A.