



Synergy Steam

E-BLP

Electric Floor Model Braising Pan with Power Tilt



OPTIONS AND ACCESSORIES

(AT ADDITIONAL CHARGE)

- Faucets
 - ☐ Single pantry faucet
 - ☐ Double pantry faucet
- Spray hose assembly for pantry faucets
 - ☐ 48" (1219 mm)
 - ☐ 60" (1524 mm)
- ☐ Steam pan insert
- ☐ Steam pan carrier
- ☐ 2" tangent drawoff (must be ordered with unit)
- ☐ Strainer for tangent drawoff valve
- ☐ Pouring lip strainer
- ☐ Flanged feet
- ☐ Casters



Project _____

Item No. _____

Quantity _____

- ☐ Model 30E-BLP (30 gallon, narrow width, electric braising pan with power tilt)
- ☐ Model 40E-BLP (40 gallon, narrow width, electric braising pan with power tilt)

CONSTRUCTION

- 304 stainless steel
- Pan is heavy duty, 10" deep, one piece welded construction
- 5/8" thick stainless steel cooking surface prevents warping or distortion
- Flat bar electric heating elements ensure efficient heat transfer across the entire cooking surface
- Control and tilt mechanism are mounted in stainless steel housings on the pan body sides
- 100 grit interior finish is coarse enough to retain butter, shortening or oil during the cooking process, minimizing food sticking and burning
- A heavy-gauge, fully adjustable one-piece cover is standard with torsion bar type counterbalance designed to maintain selected cover position.
- True rounded leg tubular stand design and 3" radius pan interiors make cleaning easier.

OPERATION

- Smooth action, quick tilting body with motorized crank tilt mechanism provides precise control during tilting
- Powerful reversing DC motor is activated by a 3 position control switch
- Pan tilts past vertical for easy cleaning
- Controls allow operation at a 7 degree angle to facilitate griddling.
- Thermostatically controlled for automatic shut-off when desired temperature is reached or heating when temperature falls below desired setting
- High limit thermostat for safety
- Console mounted power switch with indicator light
- Control includes a heat indicator light, temperature control switch and motor tilt switch
- A vent in the cover top regulates condensate buildup and a rear condensate drip shield is located under the cover to prevent condensate from dripping on floor when cover is opened.

STANDARD FEATURES

- Mounting bracket for either right, left or rear faucet mounting
- Etched markings (specify)
 - ☐ Gallons
 - ☐ Litres
- Standard voltage options (all units are field convertible to 1 phase)
 - ☐ 208 VAC, 3 phase, 60 Hz
 - ☐ 240 VAC, 3 phase, 60 Hz
 - ☐ 480 VAC, 3 phase, 60 Hz
- One year parts and labor warranty*

* For all international markets, contact your local distributor.

E-BLP BRAISING PAN WITH POWER TILT


BLODGETT

44 Lakeside Avenue, Burlington, VT 05401


Toll Free: (800) 331-5842 • Phone: (802) 860-3700 • Fax: (802) 864-0183




E-BLP ELECTRIC BRAISING PAN WITH POWER TILT

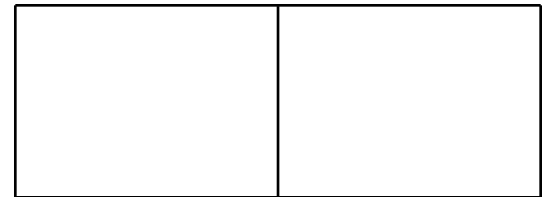


APPROVAL/STAMP

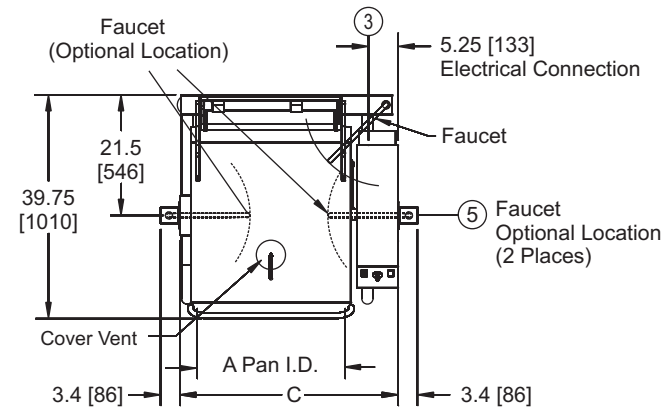


TOP VIEW

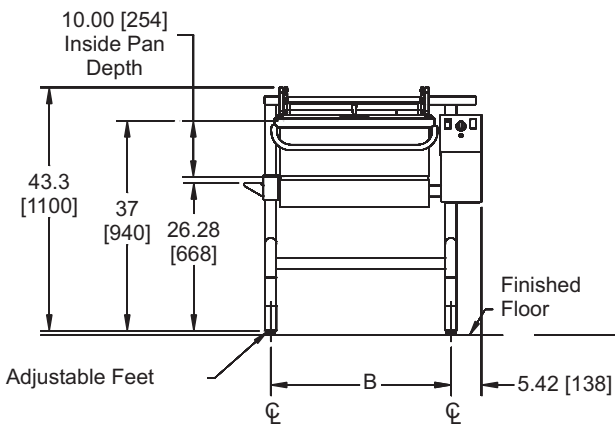

FRONT VIEW

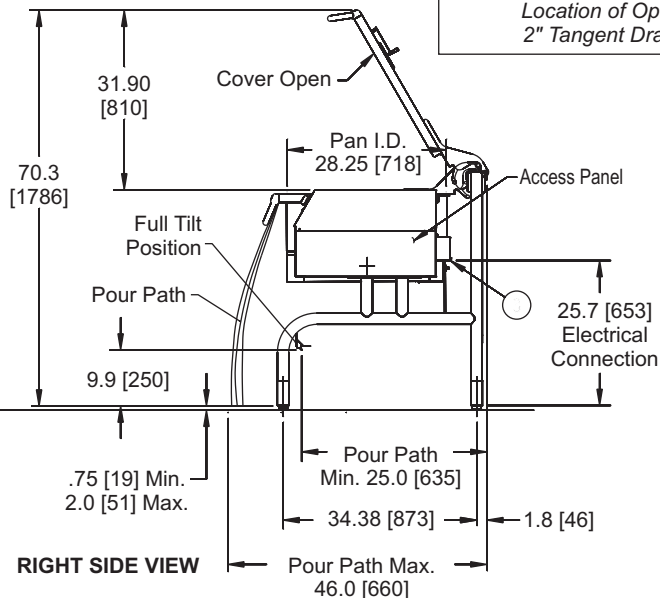

RIGHT SIDE VIEW

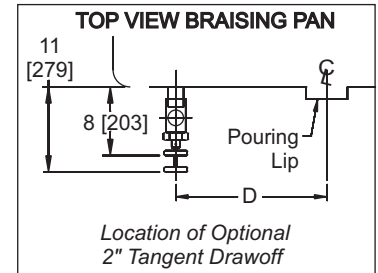

TOP VIEW BRAISING PAN

MODEL	A	B	C	D
30E-BLP	26.25 (667)	32 (813)	38.5 (984)	8.75 (222)
40E-BLP	35.75 (908)	41.5 (1054)	48 (1226)	13.5 (343)

SHORT FORM SPECIFICATIONS

Provide Blodgett model 30E-BLP, 30 gallon (114 litre) or 40E-BLP (152 litre) electrical braising pan. Unit shall be stainless steel, electric-heated, thermostatically controlled, on a rounded tubular leg stand. Heavy 5/8" thick stainless steel clad pan bottom with clamped-on flat bar-type electric heating elements. 30 gallon pan is 39" wide and 40 gallon pan is 48" wide both with a 10" deep pan. Smooth-action, motorized tilt mechanism, heavy-duty fully adjustable counterbalanced cover with condensate drip shield and cover vent. Single electric connection required; specify voltage (208, 240 or 480 Volt). UL- and NSF- listed. Made in USA. One year parts and labor warranty. Provide options and accessories as indicated.

POWER CONNECTION:

Refer to data plate.

SHIPPING INFORMATION:

Approx. Weight:

30E-BLP	463 lbs. (210 kg)
40E-BLP	535 lbs. (243 kg)

		AMPS PER LINE			
Model	kW	Phase	208V	240V	480V
30E-BLP	11.5 kW	1	55	48	n/a
		3	32	28	14
40E-BLP	15.3 kW	1	74	64	n/a
		3	43	37	19

NOTE: The company reserves the right to make substitutions of components without prior notice.

BLODGETT

44 Lakeside Avenue, Burlington, VT 05401 Toll Free: (800) 331-5842 • Phone: (802) 860-3700 • Fax: (802) 864-0183