

## ELECTRIC HOT FOOD TABLES WITH UNDERSHELF





ltem #:	Qty #:	
Model #:		
Project #:		

Featuring as Standard: "THE PROVEN" **ORIGINAL ADVANCE TABCO** Adjustable Undershelf with Die Cast Leg Clamp

HF-2E-240 Shown

#### **FEATURES:**

Stainless steel body and top Galvanized adjustable legs & bullet feet Galvanized undershelf

Fiberglass insulation between each compartment Units intended for dry use. For hot water bath, must use optional Spillage Pans # SP-A (Aluminum) or

# SP-S (Stainless) Stainless steel 8" support shelf with removable 3/8" thick poly cutting board - Ships K.D.

#### **MATERIAL:**

TOP: 20 gauge #302 stainless steel with die stamped pan openings. (11.875" x 20.062") BODY: 22 gauge #430 stainless steel LEGS: 1 5/8" diameter tubular galvanized steel 1" adjustable bullet feet Stainless steel gussets **UNDERSHELF:** Galvanized steel

LINERS: 8" deep, 22 Gauge galvanized (standard) or #302 stainless steel upgrade (Model # SU-32) **CUTTING BOARD:** White Thermoplastic CUTTING BOARD BRACKETS: 16 gauge, #302 stainless steel

### **ELECTRICAL:**

120V units yield 500 Watts 208V/240V dual voltage units yield 750 Watts at 208V and 1000 Watts at 240V 6' electrical cord with plug Infinite control knobs Indicator lights



Model #	Length	Width*	# of Wells	Volts	Amps	Watts	NEMA Plug	Wt.	Cu. Ft.
HF-2E-120	A = 31-13/16"	30-5/8"	2	120	8.33	1000	5-20P	92 lbs.	28
HF-3E-120	B = 47-1/8"	30-5/8"	3	120	12.50	1500	5-20P	130 lbs.	41.32
HF-4E-120	C = 62-7/16"	30-5/8"	4	120	16.67	2000	L5-30P	152 lbs.	54.55
HF-2E-240	A = 31-13/16"	30-5/8"	2	208/240	7.21/8.33	1500/2000	6-20P	92 lbs.	28
HF-3E-240	B = 47-1/8"	30-5/8"	3	208/240	10.82/12.50	2250/3000	6-20P	130 lbs.	41.32
HF-4E-240	C = 62-7/16"	30-5/8"	4	208/240	14.42/16.67	3000/4000	L6-30P	152 lbs.	54.55
HF-5E-240	D = 77-3/4"	30-5/8"	5	208/240	18.03/20.84	3750/5000	L6-30P	170 lbs.	66.94

\*Width Includes 8" Cutting Board

NOTE: Units are not designed to cook or heat frozen or refrigerated foods. Food placed in tables should already be hot, and the table will maintain the proper temperatures


NEMA PLUGS: Your plug will look like this...







NEMA L6-30P



**NEMA 5-20P** 

**NEMA 6-20P** 

NEMA L5-30P

NOTE: For international applications, plug may need to be replaced (by others) in field.


Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.



For Orders & Customer Service: Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication<sup>™</sup> Quotes: Email: smartfab@advancetabco.com or Fax: 631-586-2933

# DIMENSIONS and SPECIFICATIONS

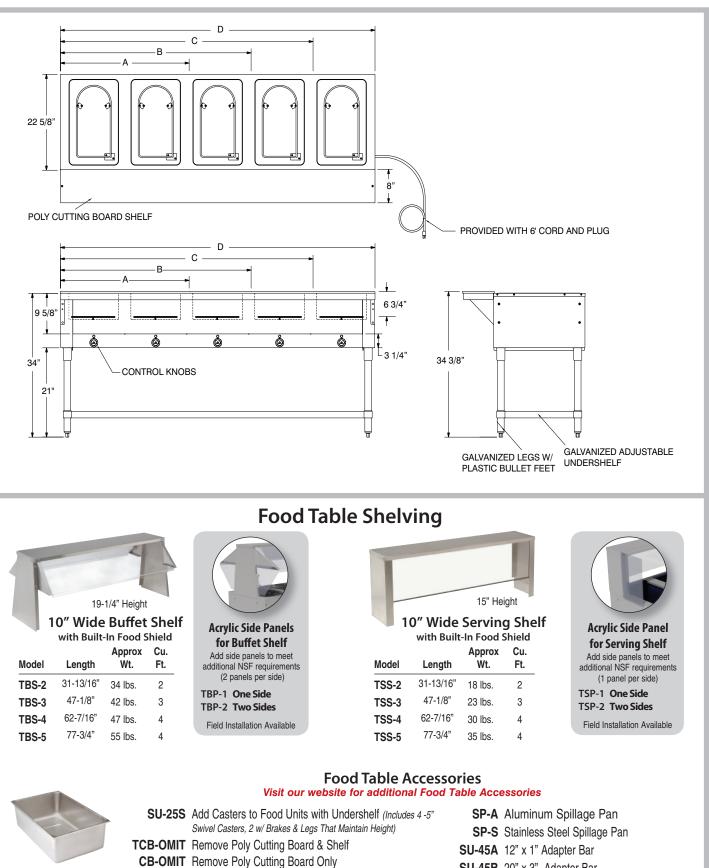

SP-A - Spillage Pan



ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice. © ADVANCE TABCO, DECEMBER 2017

SU-45B 20" x 3" Adapter Bar