The Vollrath Company, L.L.C



Project:

Item Number:

Quantity:

MIRAGE® STANDARD DROP-IN INDUCTION WARMERS



High-effiency, standard, single element drop-in induction warmer with push button controls.

DESCRIPTION

The high-efficiency, standard drop-in induction warmers are designed for use in buffet stations with induction-ready chafers and serving pieces. The 120 volt warmers plug easily into standard 15 amp or 20 amp, 120V outlets.

The case frame is made from heavy-duty, 18-gauge stainless steel with a vitro ceramic top. The ceramic top is easily cleaned with a mild cleaner.

The induction warmer is equipped with a variety of safety features including:

- Over-heat protection
- Small-article detection
- Pan auto-detection function
- Empty-pan shut-off

ITEMS

5950145 450W Drop-in Induction Warmer (US/Canada) 5950170 700W Drop-in Induction Warmer (US/Canada)

FEATURES

- G4 engine for long life
- Simple 1-5 power level adjustments
- 1-180 minute timer for length of cooking time control
- 90% efficiency rating
- Warmers display HOT when unit is turned off, if the top is still hot
- Vertical control panel for runoff of liquid spills
- Unit comes complete with a 6-ft. (183 cm) cord and plug and does not require hard wiring
- Requires a 15A circuit
- Full one-year parts and labor warranty

IMPORTANT

- This appliance is intended for use with induction-ready cookware.
- All models require unrestricted intake and exhaust air ventilation for proper operation of the controls. The maximum intake temperature must not exceed 110°F (43°C). Temperatures are measured in ambient air while all appliances in the kitchen are in operation.
- Drop-in models require a minimum clearance of 3 inches (7.6 cm) on all sides and 12 inches (30.5 cm) at the bottom..

Agency Certifications







This device complies with Part 18 FCC Rules.

Due to continued product improvement, please consult www.vollrathco.com for current product specifications.

WARRANTY: All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to www.Vollrath.com.


Approvals	Date



The Vollrath Company, L.L.C. 1236 North 18th Street Sheboygan, WI 53081-3201 U.S.A. Customer Service: 800.628.0830 Canada Customer Service: 800.695.8560 Main Fax: 800.752.5620 or 920.459.6573 Technical Services: 800.628.0832 Technical Services Fax: 920.459.5462

MIRAGE® STANDARD DROP-IN INDUCTION WARMERS **DIMENSIONS** Dimensions shown in inches (cm) 14½ (36.8) 2⁷/₈ (7.3) 115/8 (29.5) 131/8 (33.3) Front View Side View 1/4" deep notch 121/2 to enable (31.8)unit to be Countertop countersunk Front View 149/16 (37) 13% (34) VOLLRATH **Top View** 12⁹/₁₆ (31.9) Top View 11³/₄ (29.9)

REMOTE CONTROL

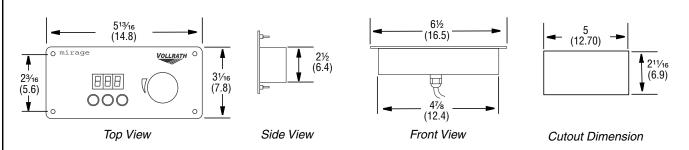


SPECIFICATIONS - 1 PHASE

of Edit Total Total Transce									
Item No.	Max Pan Size	Watts	Volts	Nominal Amps	Hz	Plug	Weight	Shipping Weight	Shipping Container
5950145	14	450	120V	3.8	50/00	NEMA	12 lbs	16.4 lbs	17% x 17 x 6%
5950170	(35.6)	700	AC	5.8	50/60	5-15P	(5.4 kg)	(7.4 kg)	(44.2 x 43.2 x 17.5)

Receptacle

Cutout Dimension





The Vollrath Company, L.L.C. 1236 North 18th Street Sheboygan, WI 53081-3201 U.S.A. Customer Service: 800.628.0830

Customer Service: 800.628.0830 Canada Customer Service: 800.695.8560 Main Fax: 800.752.5620 or 920.459.6573 Technical Services: 800.628.0832 Technical Services Fax: 920.459.5462