



## SUPERDECK SERIES 8" DECK HEIGHT GAS OVENS

# SERIES: 251, 351, 451



Bakers Pride® 8" deck height pizza ovens offer features similar to the stubby-shallow series, but with ten more inches of depth and higher burner output per oven. Each oven chamber features one Cordierite deck with independently controlled top and bottom heat dampers for perfectly balanced results. Choose from three different deck areas and overall oven widths from 48" to 66" to suit your needs.

This series is constructed with heavy-duty angle iron frame, which is fully welded to allow for stacking up to three ovens to triple production in a small footprint. Oven exteriors are all heavy-duty stainless steel and are fully insulated for cooler outer temperatures and consistent interior temperatures.

Options are available to accommodate the configuration of your kitchen, such as side-mounted controls and special-height legs.

### FEATURES AT A GLANCE

- 60,000, 70,000 or 80,000 BTUH
- Natural or LP gas (LP not CE approved)
- 300–650°F (148–343°C) temperature range
- Independently controlled top and bottom heat dampers
- Combination gas controls with valve, regulator, and pilot safety
- Heavy-duty, slide-out flame diverters
- Stackable
- 8" (203 mm) deck height
- 1.5" (38 mm) thick Cordierite decks
- Choose overall width: 48", 57" or 66"
- Choose deck area: 36" x 34.5", 45" x 34.5" or 54" x 34.5"
- All stainless steel exteriors, aluminized steel interiors
- Spring-balanced, fully insulated doors
- Side or rear gas connections
- Heavy-duty steel legs finished with durable Bakertone
- Fully insulated throughout
- Two-year limited warranty

### OPTIONS & ACCESSORIES

- Stainless steel leg covers (per pair)
- Special-height legs (per set of four)
- 150–550°F (65–287°C) bake thermostat
- Draft flue for direct vent (not available on CE units)
- Automatic oven starter
- Deck brush and scraper (48" (1219 mm) long with wood handle)
- Natural woodsmoke essence boxes and stainless steel wood chip box
- Legs with casters
- Lightstone decks
- Steel decks






# SUPERDECK SERIES 8" DECK HEIGHT GAS OVENS

## SERIES: 251, 351, 451

### EQUIPMENT DIMENSIONS

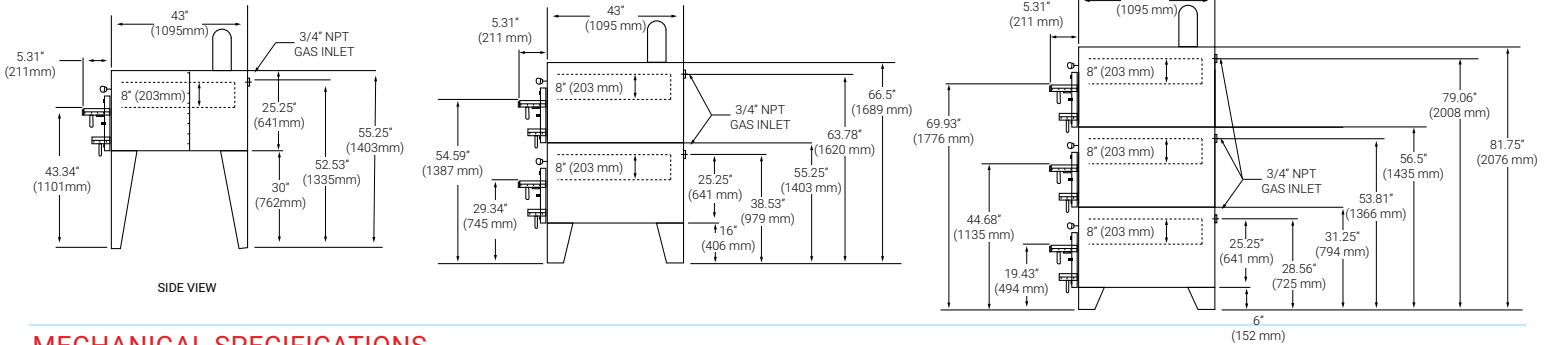

### MECHANICAL SPECIFICATIONS

Model #	Overall Dim** (W x H x D)	Total BTUH***	kW***	Deck Height	Deck Size	Decks	Baking Chambers	Thermostat Range	Carton Dim (W x H x D)	Cubic Feet	Cubic Meter	Ship Wt. •
251	48" x 55.25" x 43" (1219 x 1403 x 1092)	60,000	17.6	8" (203)	36" x 34.5" (914 x 876)	1	1	300°-650°F (149-343°C)	40" x 37" x 53" (1016 x 940 x 1346)	46	1.3	943 (428kg)
252	48" x 66.5" x 43" (1219 x 1689 x 1092)	120,000	35.16	8" (203)	36" x 34.5" (914 x 876)	2	2	300°-650°F (149-343°C)	*	*	*	1772 (804kg)
253	48" x 81.75" x 43" (1219 x 2076 x 1092)	180,000	52.8	8" (203)	36" x 34.5" (914 x 876)	3	3	300°-650°F (149-343°C)	*	*	*	2715 (1232kg)
351	57" x 55.25" x 43" (1448 x 1403 x 1092)	70,000	20.5	8" (203)	45" x 34.5" (1143 x 876)	1	1	300°-650°F (149-343°C)	36" x 72" x 52" (914 x 1829 x 1321)	78	2.3	1078 (489kg)
352	57" x 66.5" x 43" (1448 x 1689 x 1092)	140,000	41	8" (203)	45" x 34.5" (1143 x 876)	2	2	300°-650°F (149-343°C)	*	*	*	2060 (934kg)
353	57" x 81.75" x 43" (1448 x 2076 x 1092)	210,000	61.5	8" (203)	45" x 34.5" (1143 x 876)	3	3	300°-650°F (149-343°C)	*	*	*	3033 (1376kg)
451	66" x 55.25" x 43" (1676 x 1403 x 1092)	80,000	23.4	8" (203)	54" x 34.5" (1372 x 876)	1	1	300°-650°F (149-343°C)	36" x 72" x 52" (914 x 1829 x 1321)	78	2.3	1259 (571kg)
452	66" x 66.5" x 43" (1676 x 1689 x 1092)	160,000	46.88	8" (203)	54" x 34.5" (1372 x 622)	2	2	300°-650°F (149-343°C)	*	*	*	2294 (1041kg)
453	66" x 81.75" x 43" (1676 x 2076 x 1092)	240,000	70.2	8" (203)	54" x 34.5" (1372 x 622)	3	3	300°-650°F (149-343°C)	*	*	*	3327 (1509kg)

\*Each oven ships in separate carton as do the legs. Refer to the single unit for carton specs. Shipping weight shown includes all decks and legs.

\*\*Height includes 30" (762 mm) legs on single units, 16" (406 mm) on stacked units, and 6" (mm) on triple stacked units. Add an additional 6" to height for flue stack depending on installation.

\*\*\*CE certification not available in LP gas

### GAS CONNECTIONS

3/4"  
CE certification not available with LP gas  
Each deck requires a separate gas connection

### REQUIRED CLEARANCES

	Non-Combustible Construction	Combustible Construction
Left	0" (0 mm)	1" (25 mm)
Right	0" (0 mm)	3" (76 mm)
Back	2" (51 mm)	3" (76 mm)

Bakers Pride reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.



Freight Class: 77.5,  
FOB Allen 75013

5.28.2019

